
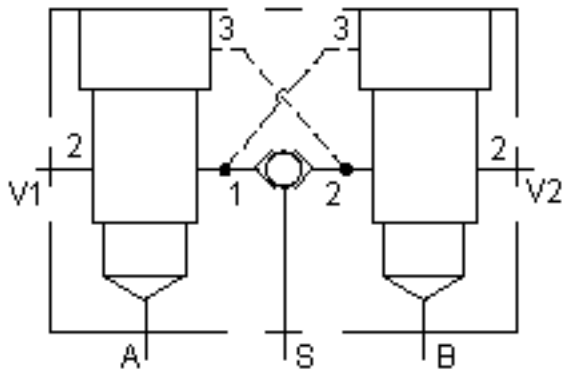
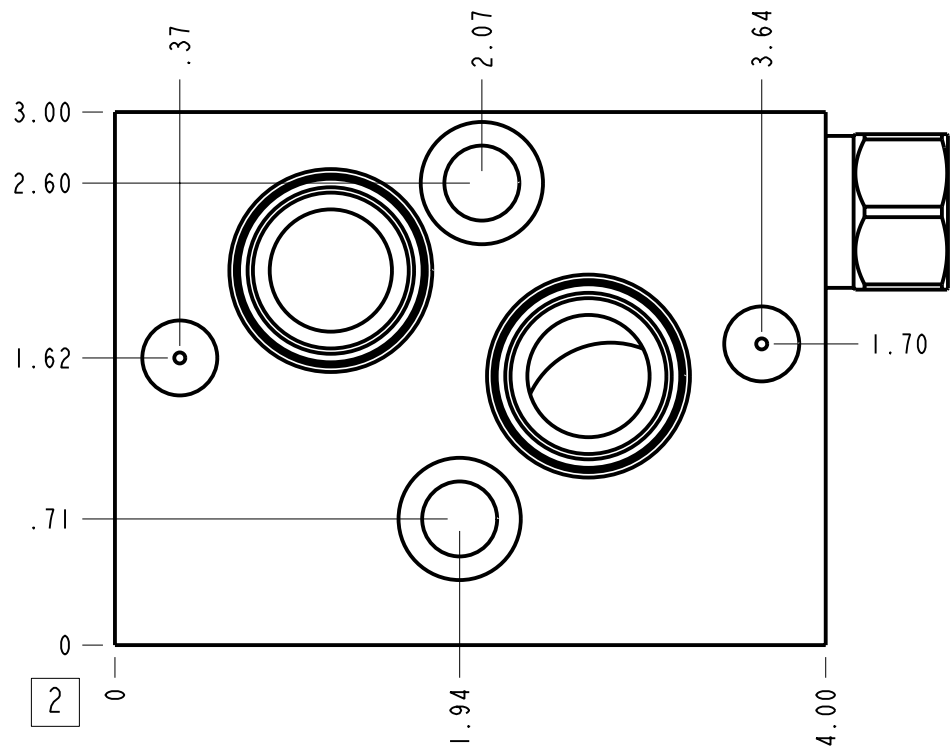
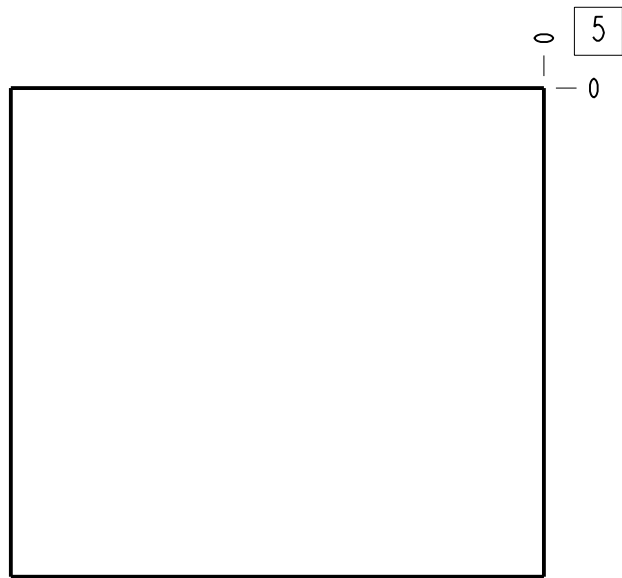
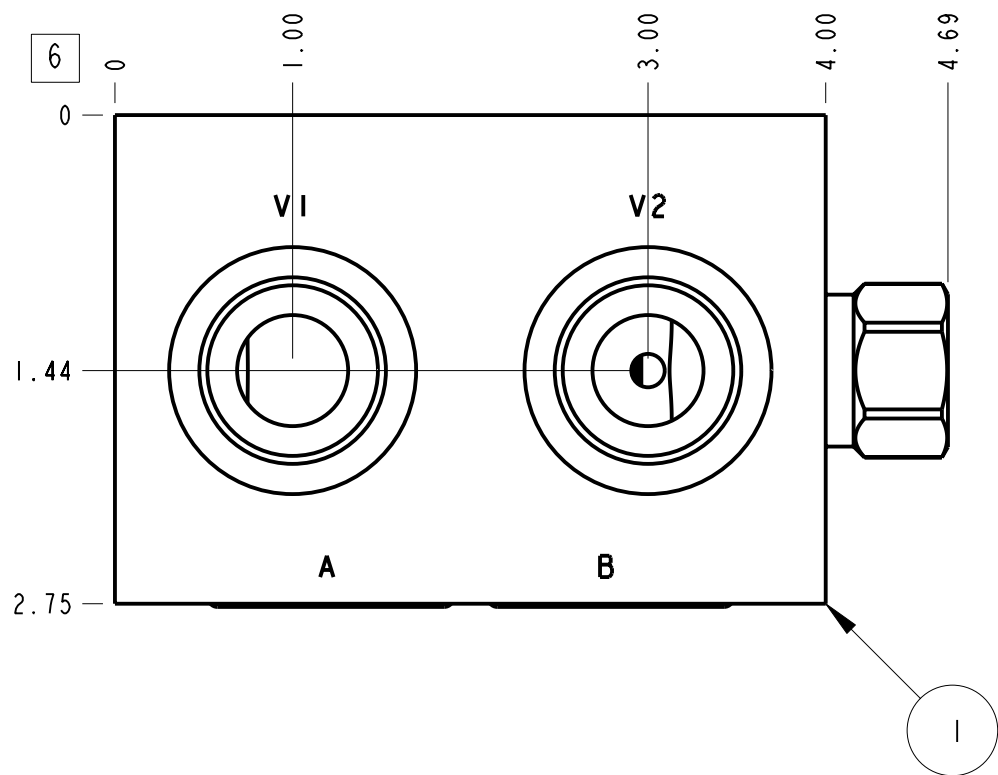
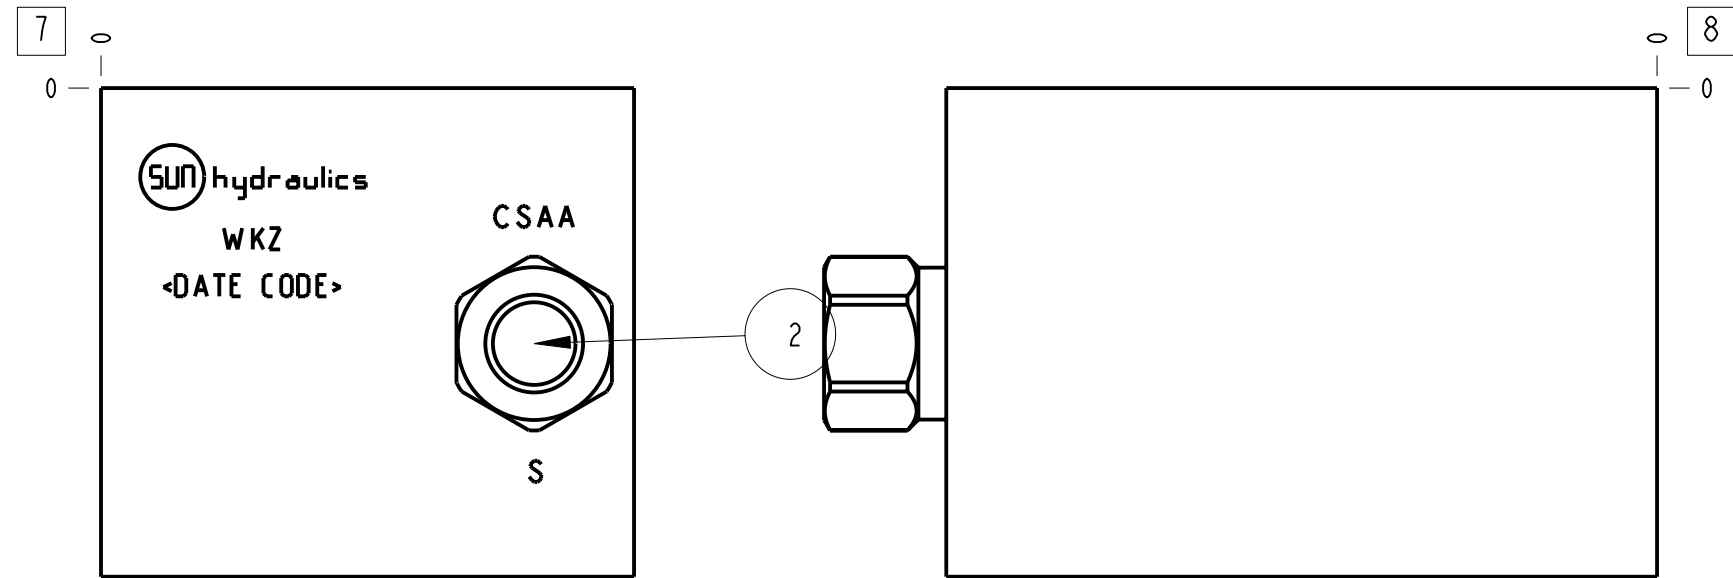


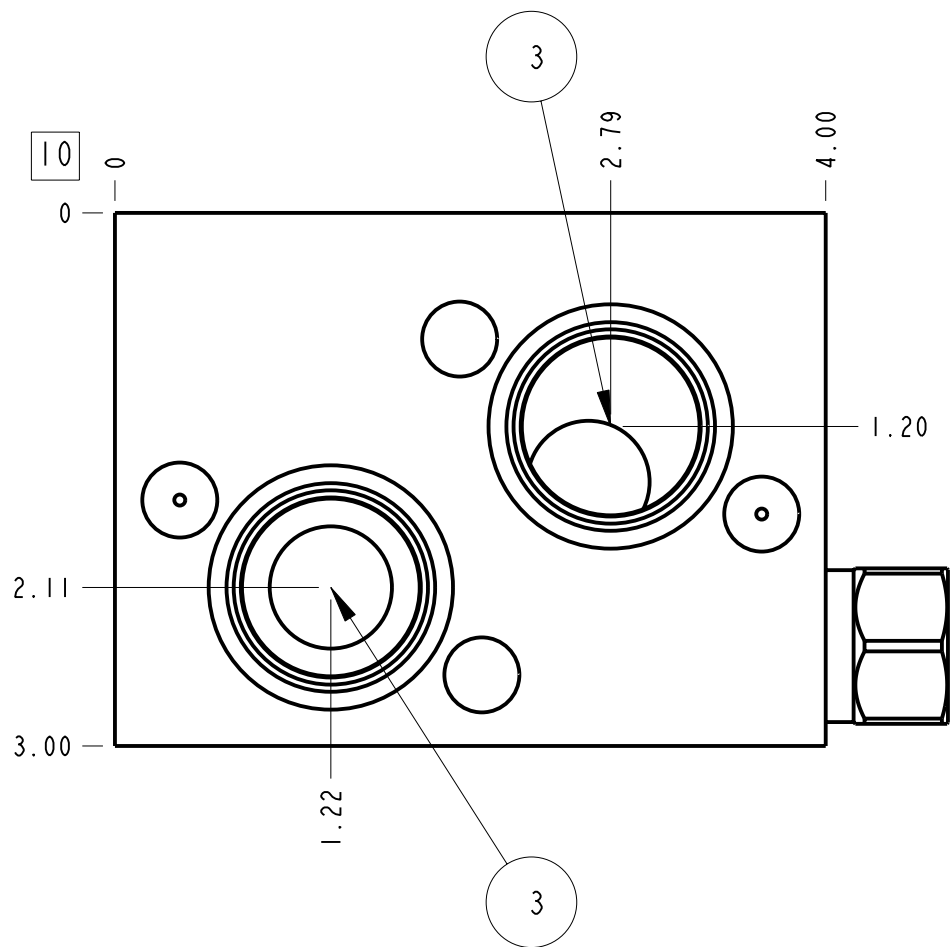

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
WKZ	Ports V1 & V2	3/4" BSPP
WKZ	Port S	1/4" BSPP

Technical Data	U.S. Units	Metric Units
Cavity	T-2A	
Body Features	Cross pilot with shuttle	
Body Type	Motor mount	
Interface	Danfoss OMT	
Open Cavity Quantity	2	
Weight	2.607 lb.	1,183 kg.
Mounting Hole Diameter	.42 in.	10,7 mm
Mounting Hole C'bore Diameter	.68 in.	
Mounting Hole C'bore Depth	.35 in.	8 mm
Includes integral cartridge(s)	Yes (see Included Components)	

3	500-001-123		N-0674-70	O-RING	2
2	CSAABXN			SHUTTLE VALVE	1
1	159-343-003		6061-T6 ALUMINUM	BODY	1
ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY
MODEL WKZ			ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE		<div>FIRST ANGLE</div> <div>THIRD ANGLE</div> <div>SUN hydraulics®</div>
DESCRIPTION T-2A Motor mount Danfoss OMT Cross pilot with shuttle			DATE Oct-14-24	SCALE 0.925	
			DWG SIZE C	SHEET 1	