
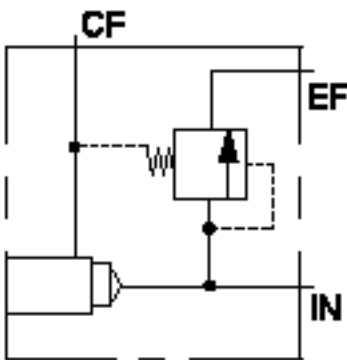
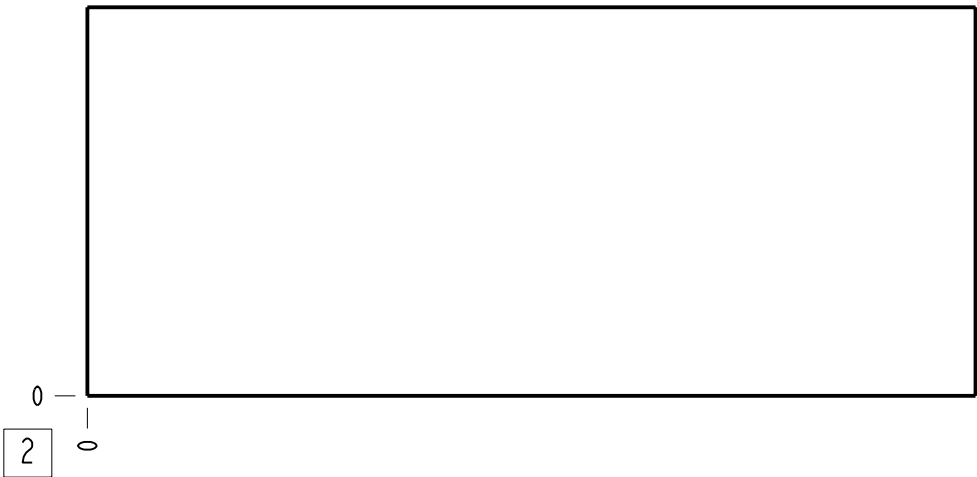
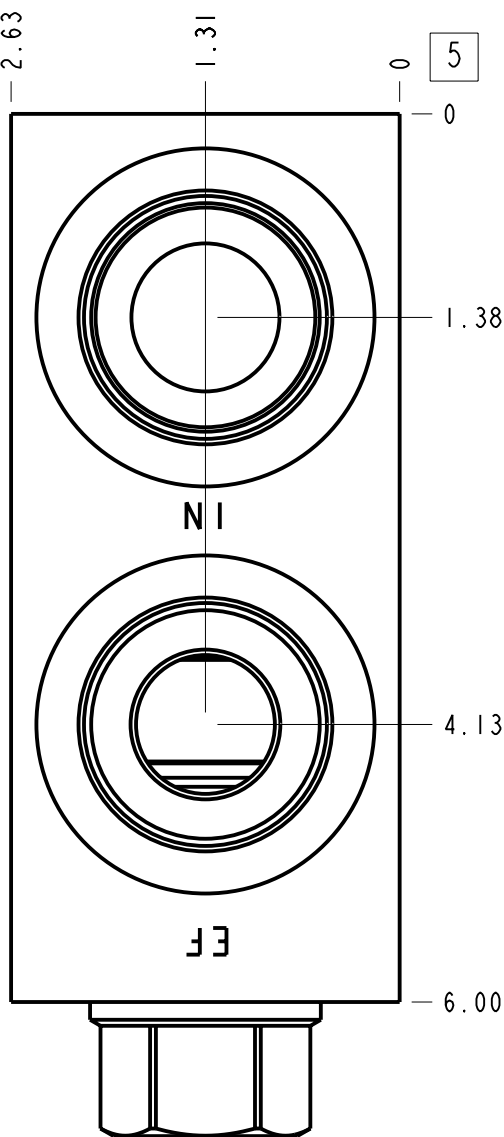
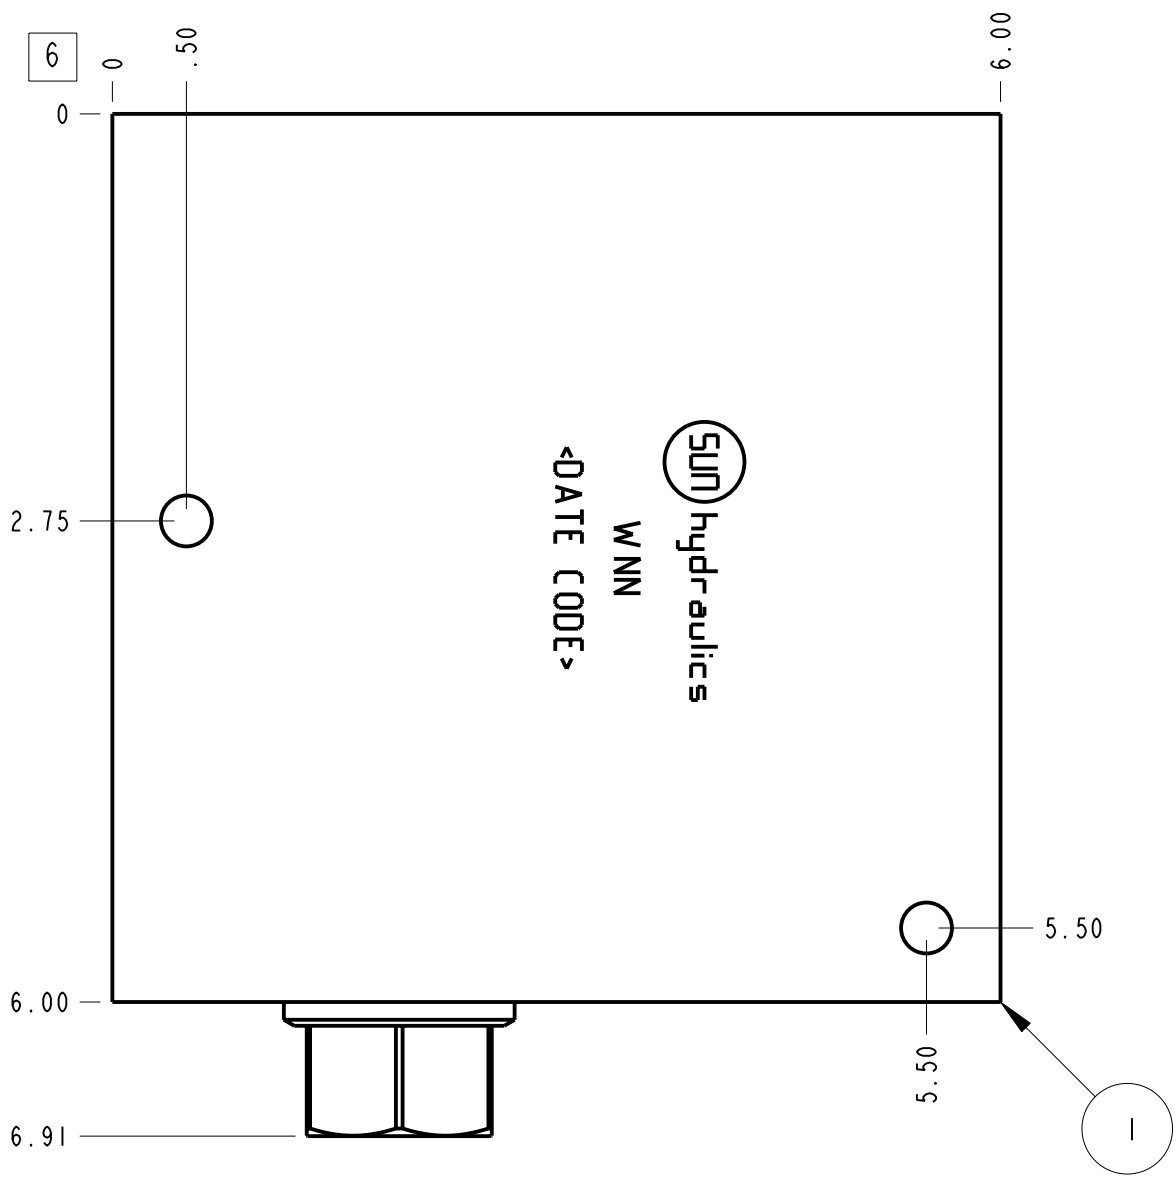
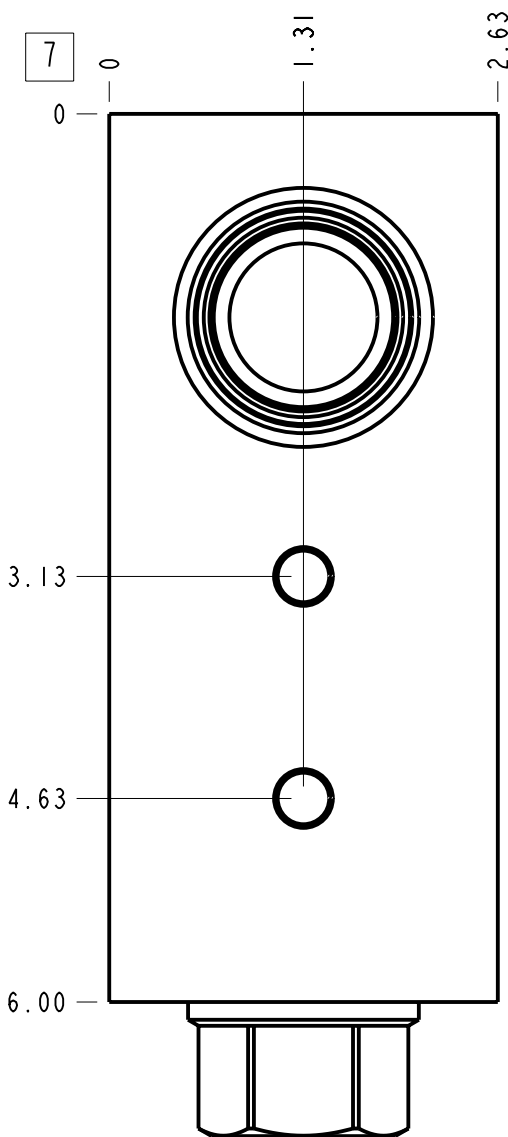


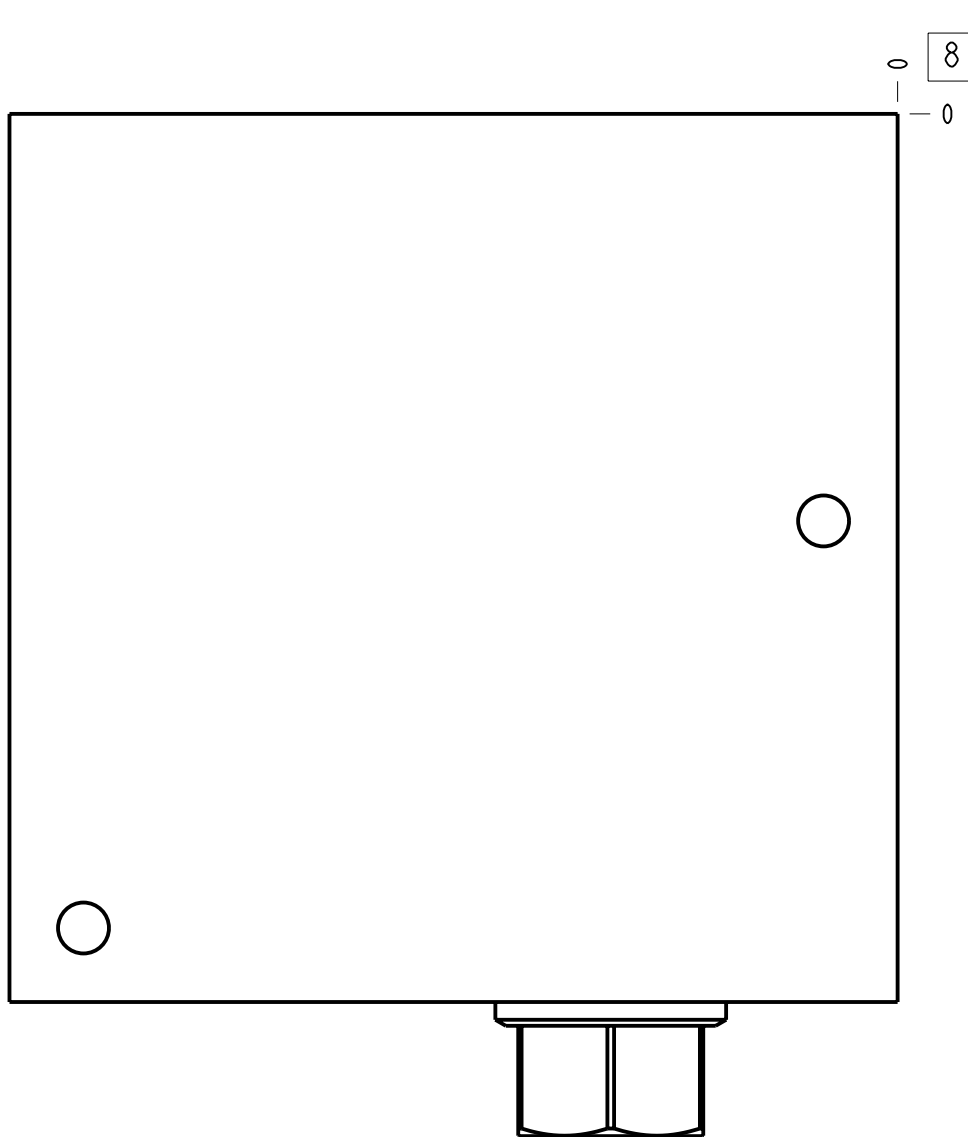

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
WNN	Ports IN & EF	SAE 20
WNN	Port CF	SAE 16

Technical Data	U.S. Units	Metric Units
Cavity	T-16A	
Body Features	With bypass compensator	
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	1	
Weight	8.130 lb.	3,687 kg.
Mounting Hole Diameter	.34 in.	8.6 mm
Mounting Hole Thread	.375-16 UNC - 2B in.	
Mounting Hole Depth	.62 in.	15,7 mm
Mounting Hole Quantity	4	
Includes integral cartridge(s)	Yes (see Included Components)	

2	LRHC-XHN			MODULATING ELEMENT VALVE		
1	152-437-006		6061-T6 ALUMINUM	BODY		
ITEM	PART NO.	SETTING	MATERIAL	PART NAME		
MODEL			WNN		ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE	
DESCRIPTION			DATE	SCALE	DWG SIZE	SHEET
T-16A Line mount With bypass compensator			Apr-02-25	0.771	C	1
			   			
						