
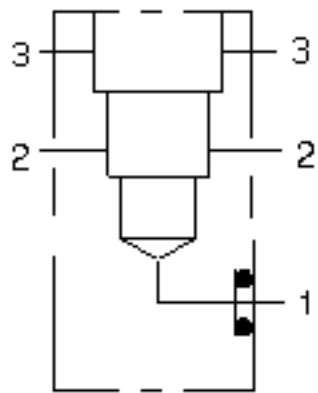
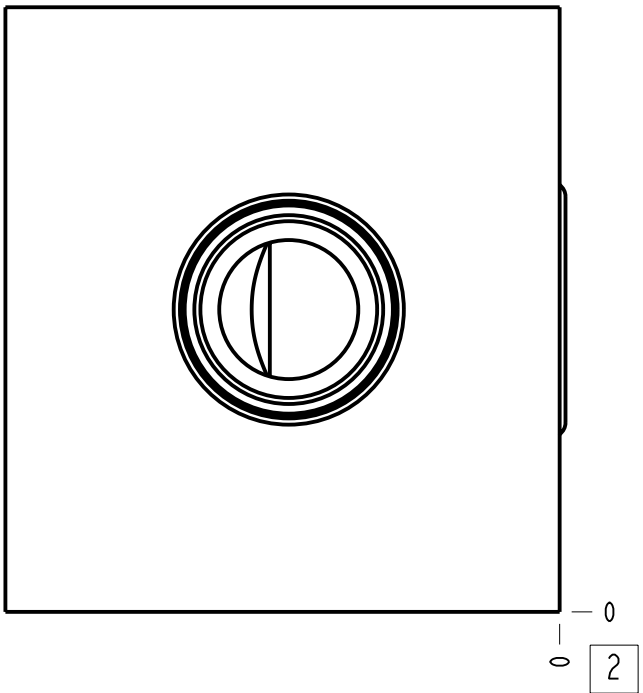
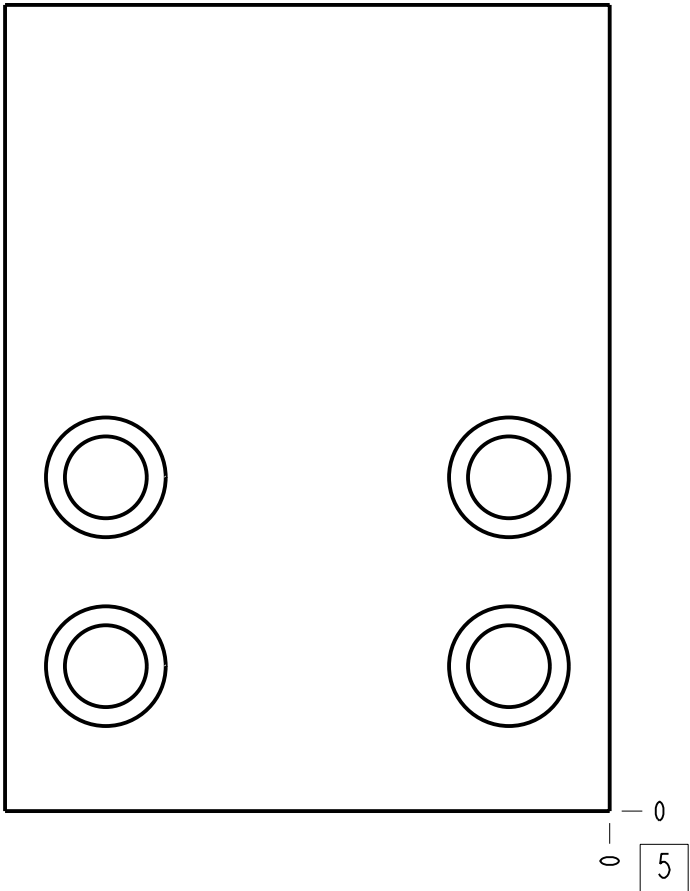
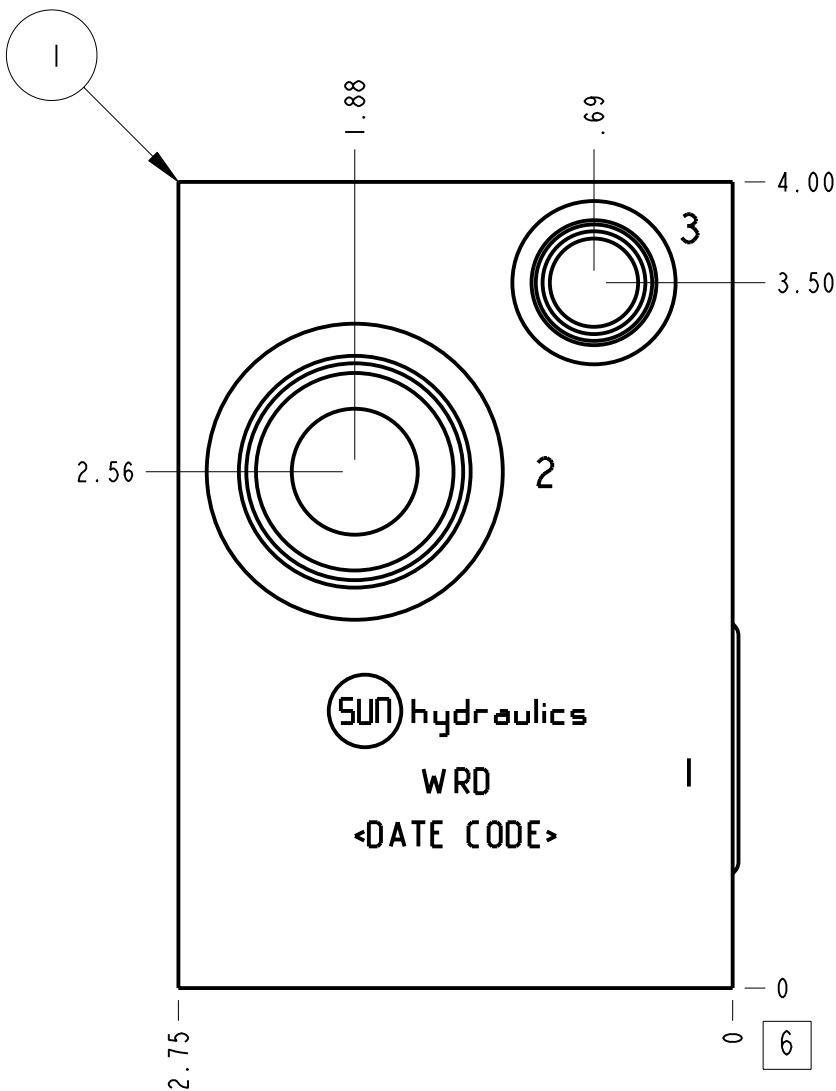
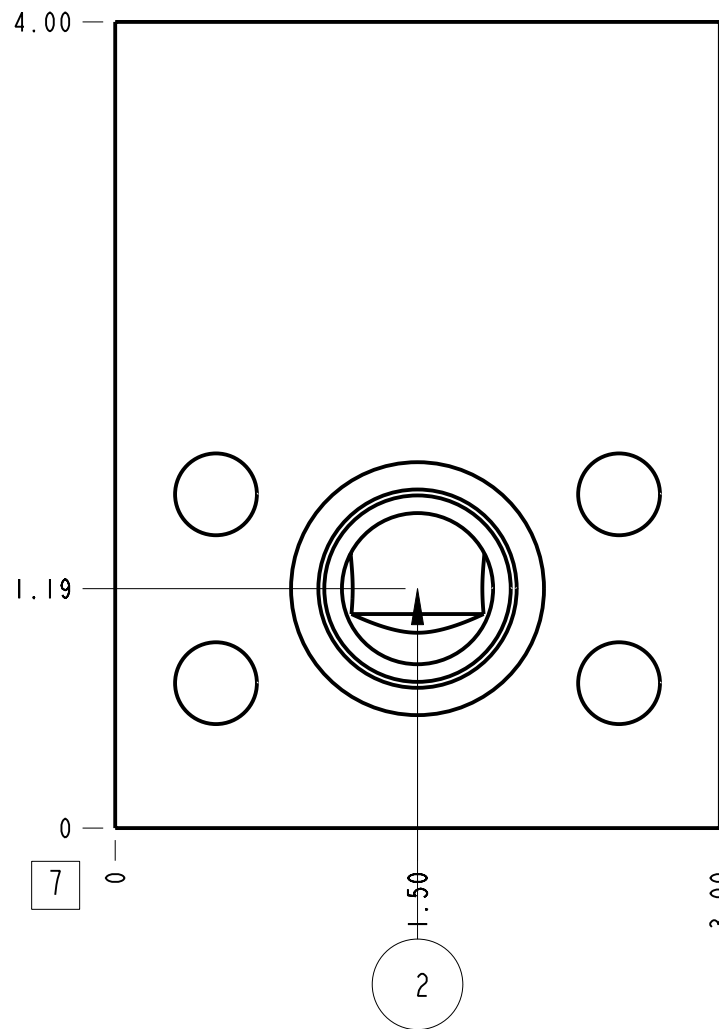


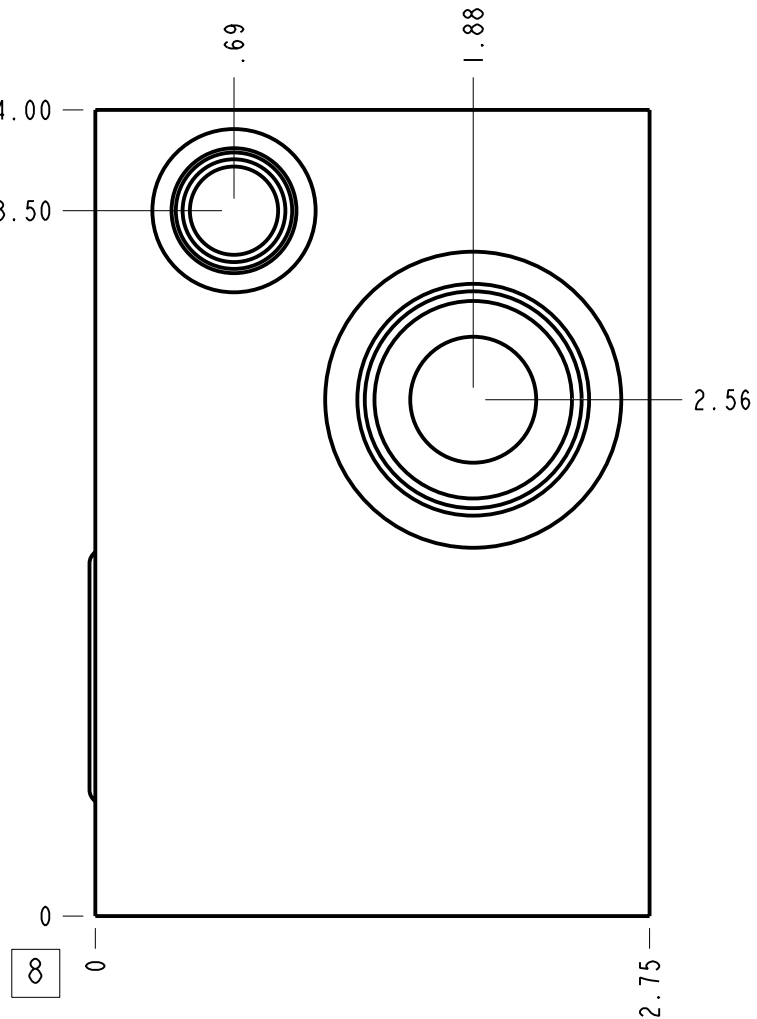

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
WRD	Port 1	3/4" Code 62
WRD	Port 2	SAE 12
WRD	Port 3	SAE 6

Technical Data		U.S. Units	Metric Units
Cavity		T-2A	
Body Features		Direct mount, through port 2	
Body Type		Line mount	
Interface		0.75 SAE C62	
Open Cavity Quantity		1	
Weight		2.586 lb.	1,173 kg.
Maximum Operating Pressure - 6061-T651 Aluminum		3000 psi	210 bar
Maximum Operating Pressure - 65-45-12 Ductile Iron		5000 psi	350 bar
Mounting Hole Diameter		.41 in.	10,4 mm
Mounting Hole C'bore Diameter		.59 in.	15,0 mm
Mounting Hole C'bore Depth		.38 in.	9,7 mm

2	500-001-214		N-0674-70	O-RING	
1	152-143-004		6061-T6 ALUMINUM	BODY	
ITEM	PART NO.	SETTING	MATERIAL	PART NAME	
MODEL			ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE		FIRST ANGLE THIRD ANGLE
WRD					
DESCRIPTION			DATE	SCALE	DWG SIZE
T-2A Line mount 0.75 SAE C62 Direct mount, through port 2			May-29-26	1.050	C
			SHEET	1	
					