


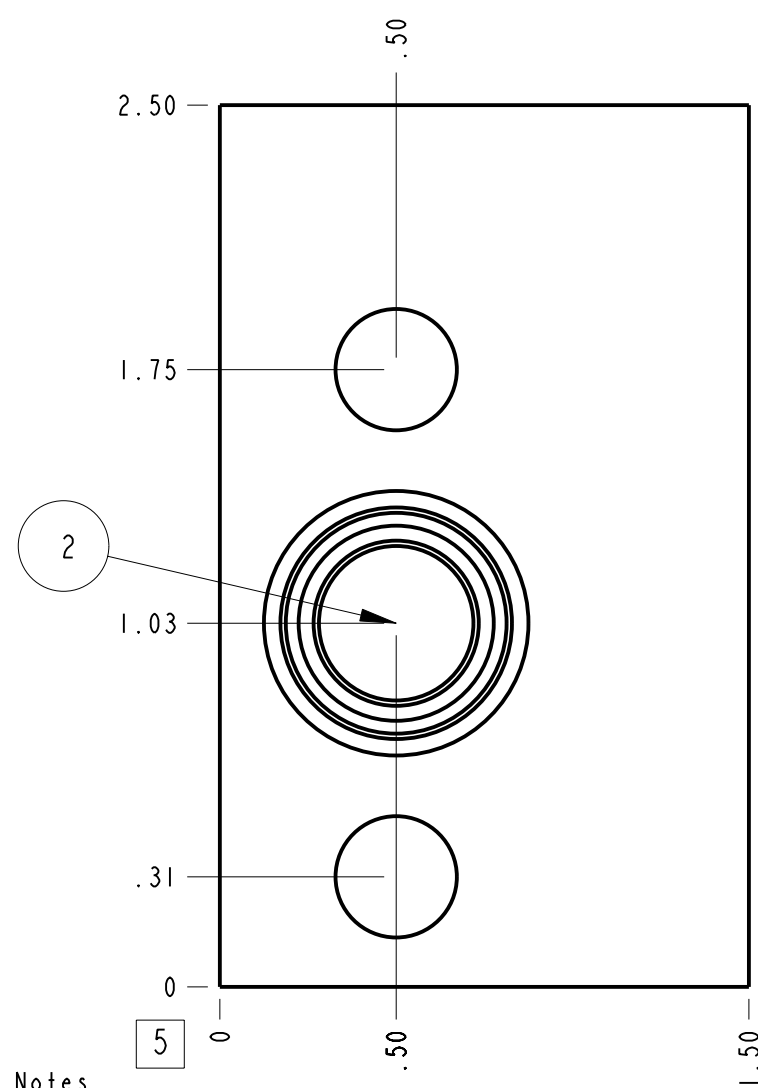
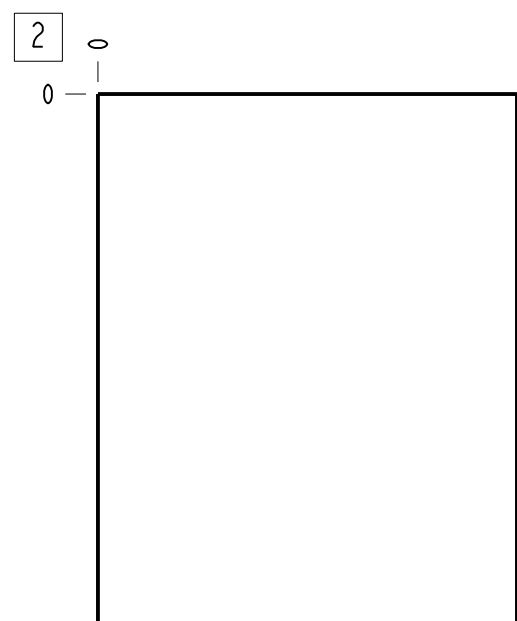



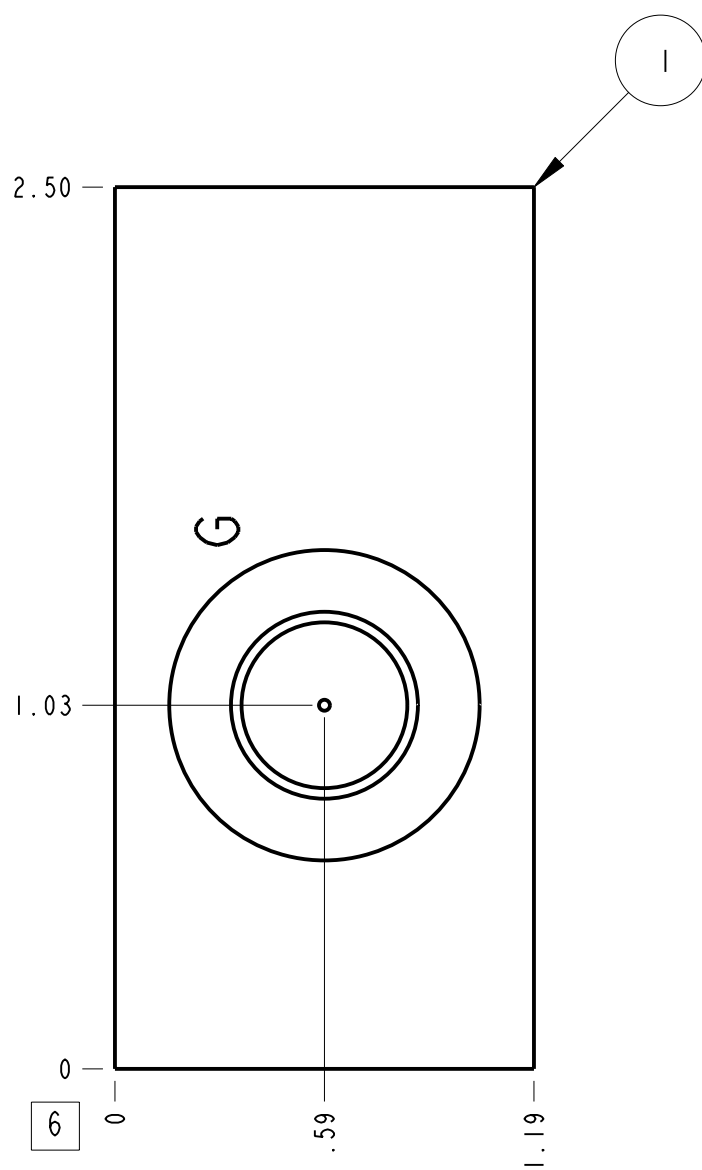




Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

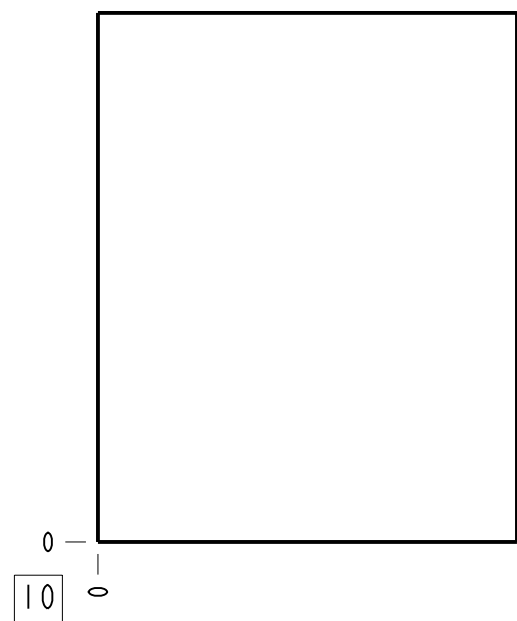

	Technical Data	U.S. Units	Metric Units
	Body Features	Direct mount	
	Body Type	Line mount	
	Interface	Special - 2 bolt	
	Open Cavity Quantity	0	
	Weight	0.383 lb.	0,174 kg.
Maximum Operating Pressure - 6061-T651 Aluminum		3000 psi	210 bar
Maximum Operating Pressure - 65-45-12 Ductile Iron		5000 psi	350 bar
	Mounting Hole Diameter	.34 in.	8.6 mm
	Mounting Hole Depth	Through	
	Mounting Hole Quantity	2	

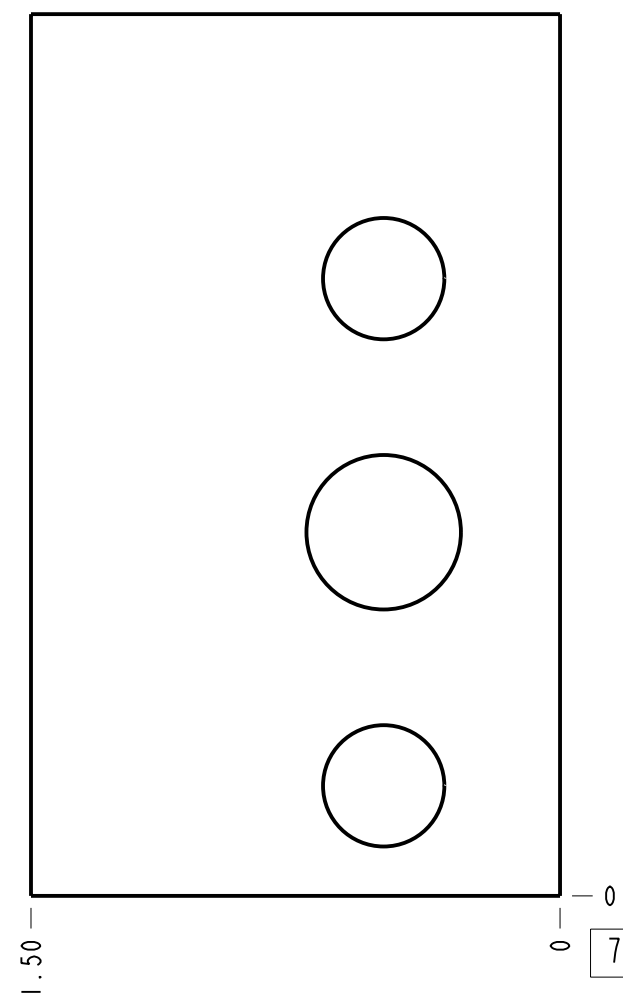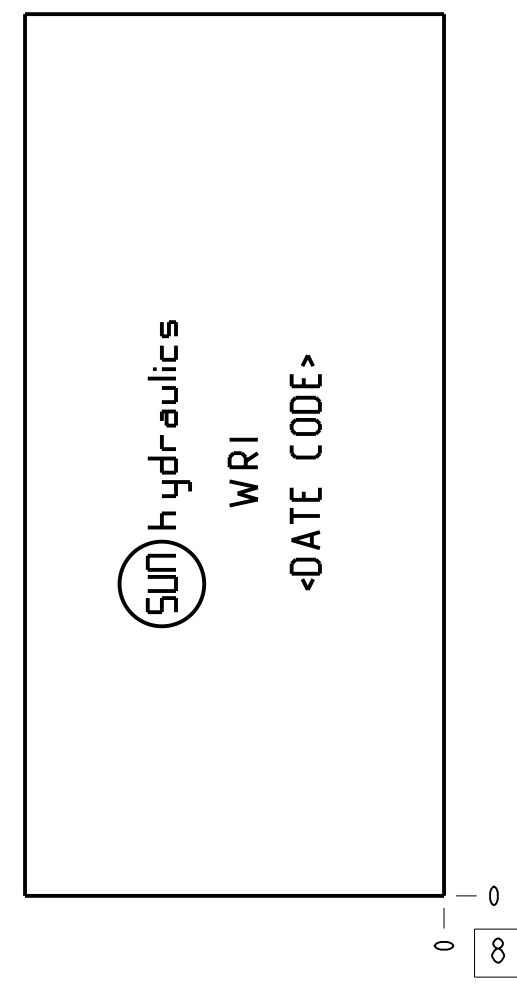

2	500-001-016		N-0674-70	O-RING	I
1	152-157-003		6061-T6 ALUMINUM	BODY	I
ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY
MODEL WRI			ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE		<div> <div>FIRST ANGLE</div>  </div> <div> <div>THIRD ANGLE</div>  </div>
DESCRIPTION Line mount Special - 2 bolt Direct mount			DATE Apr-30-24	SCALE 1.837	<div>DWG SIZE C</div> <div>SHEET I</div> <div>  </div>