






Technical Data	U.S. Units	Metric Units
Cavity	T-11A	
Body Features	Cross pilot with shuttle	
Body Type	Motor mount	
Interface	Danfoss OMP/OMR	
Open Cavity Quantity	2	
Weight	2.415 lb.	1,095 kg.
Mounting Hole Diameter	.34 in.	8.6 mm
Mounting Hole C'bore Diameter	.53 in.	13,5 mm
Mounting Hole C'bore Depth	.38 in.	9,7 mm
Includes integral cartridge(s)	Yes (see Included Components)	

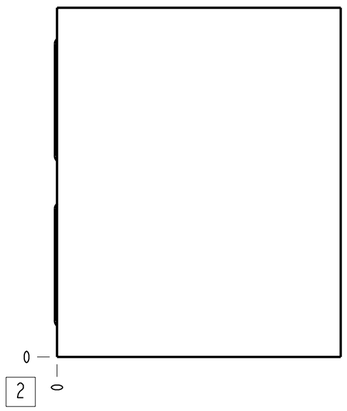


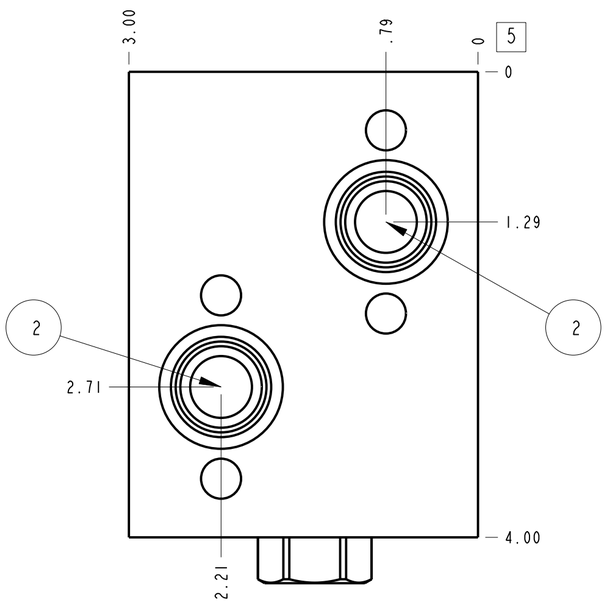

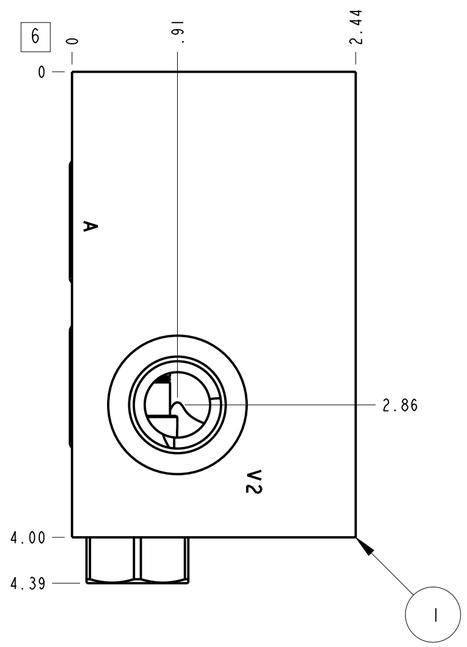

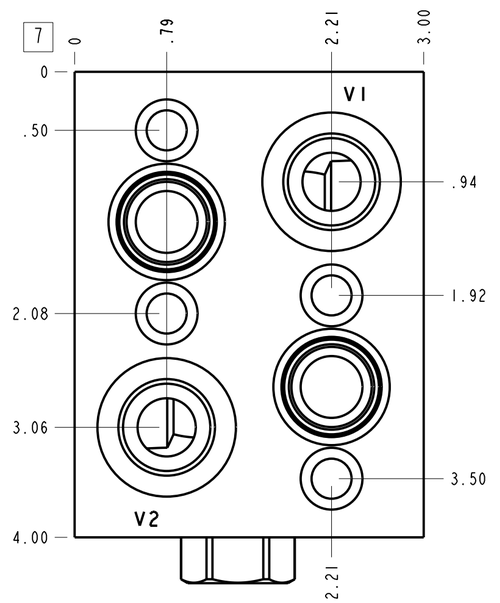

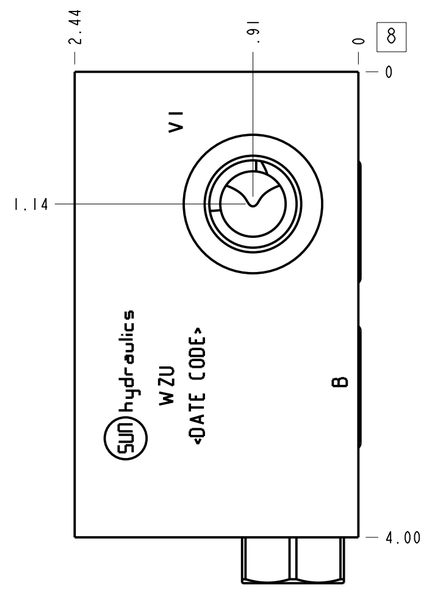

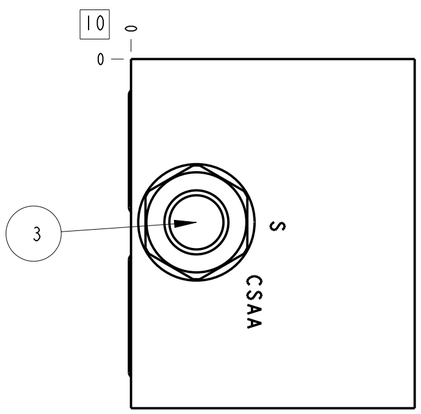

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
WZU	Ports V1 & V2	1/2" BSPP

ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY
3	CSAABXN			SHUTTLE VALVE	1
2	500-001-118		N-0674-70	O-RING	2
1	159-312-003		6061-T6 ALUMINUM	BODY	1

MODEL: WZU

ALL DIMENSIONS IN INCH
VIEWS ARE THIRD ANGLE

FIRST ANGLE THIRD ANGLE

DESCRIPTION: T-11A Motor mount Danfoss OMP/OMR
Cross pilot with shuttle

DATE	SCALE	DWG SIZE	SHEET
Apr-20-26	0.994	C	1

sun hydraulics