

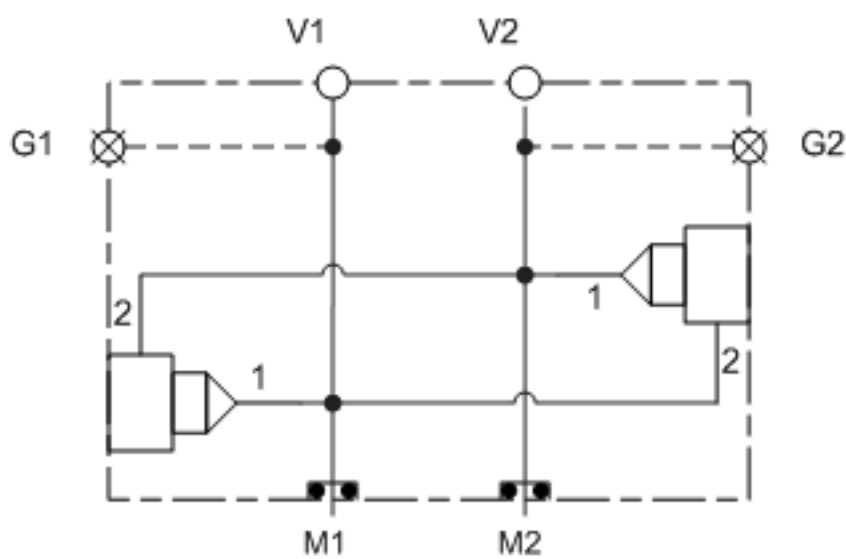
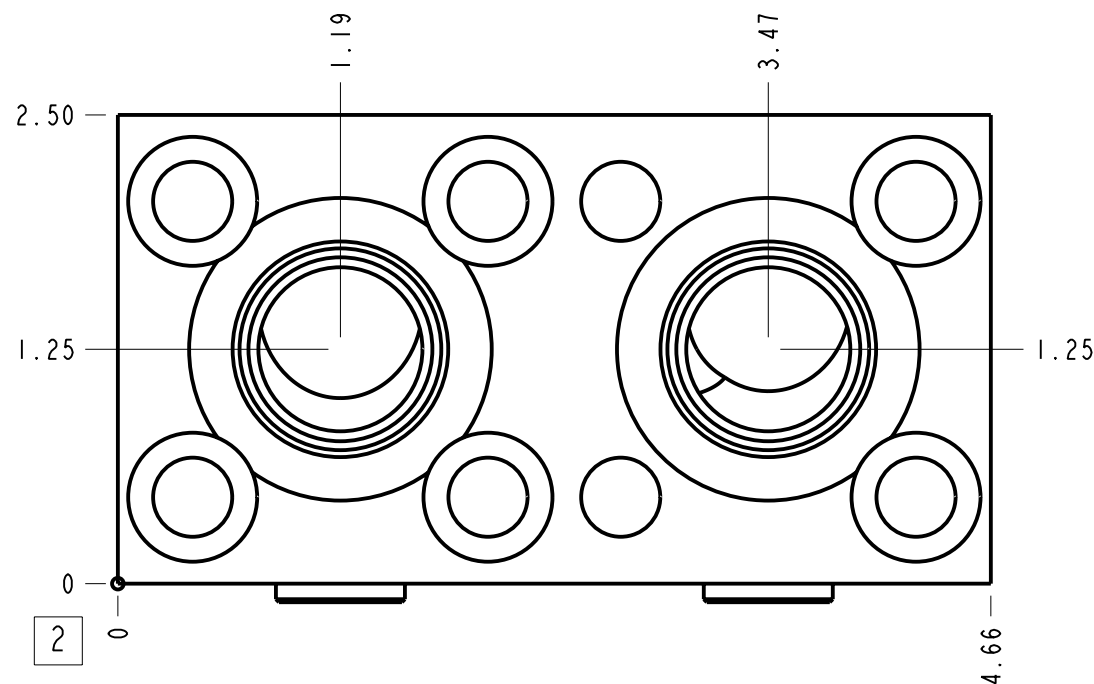
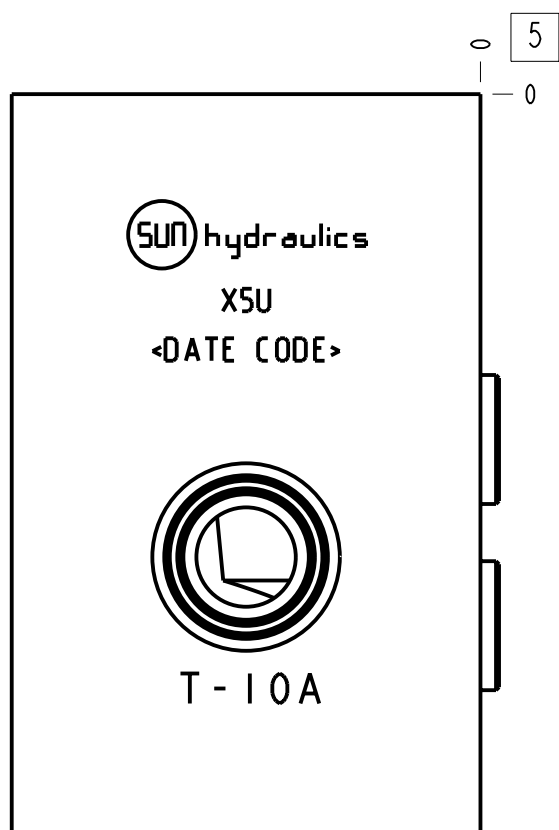
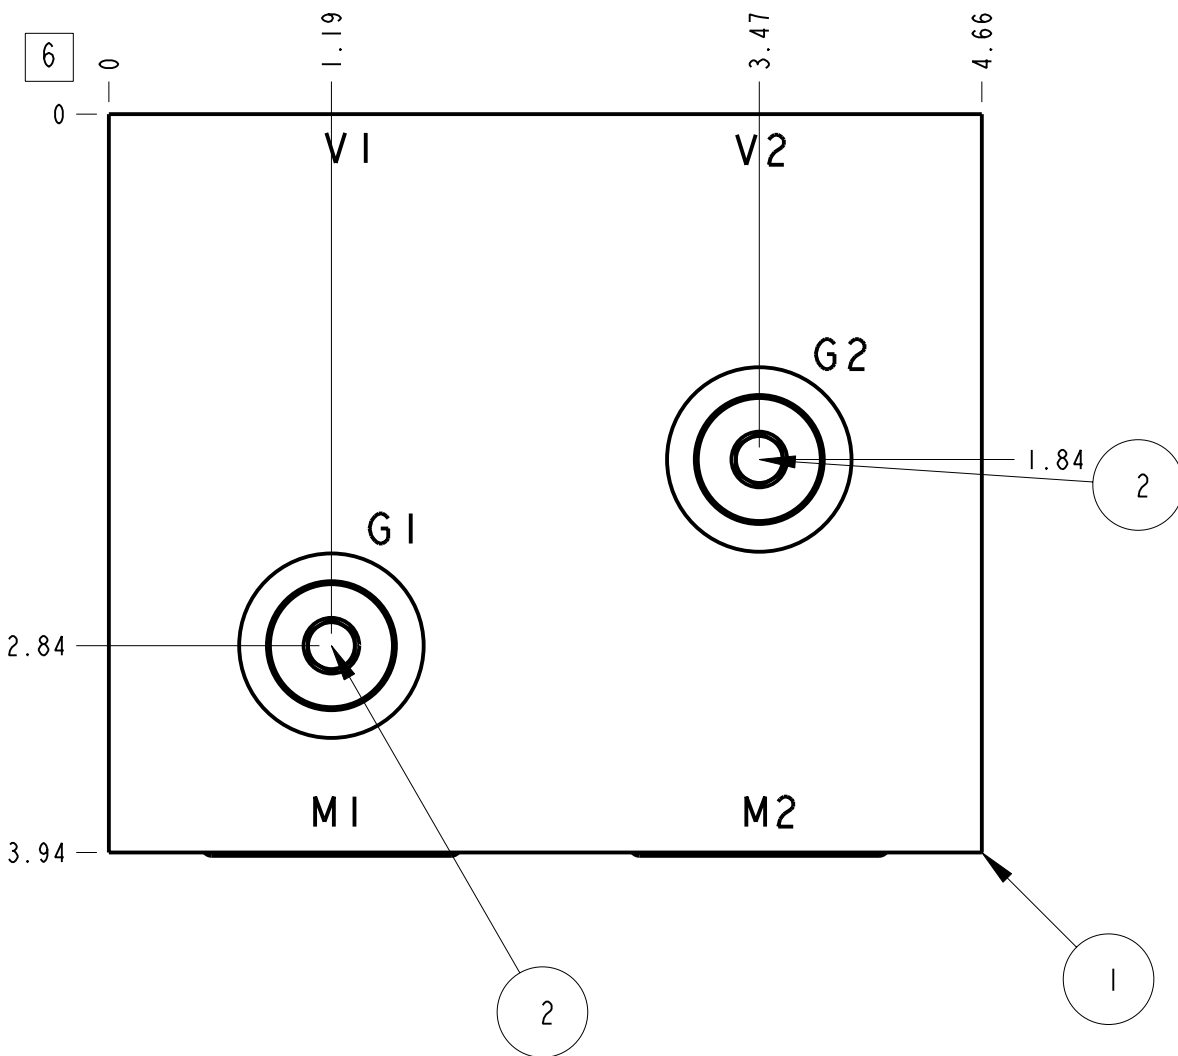


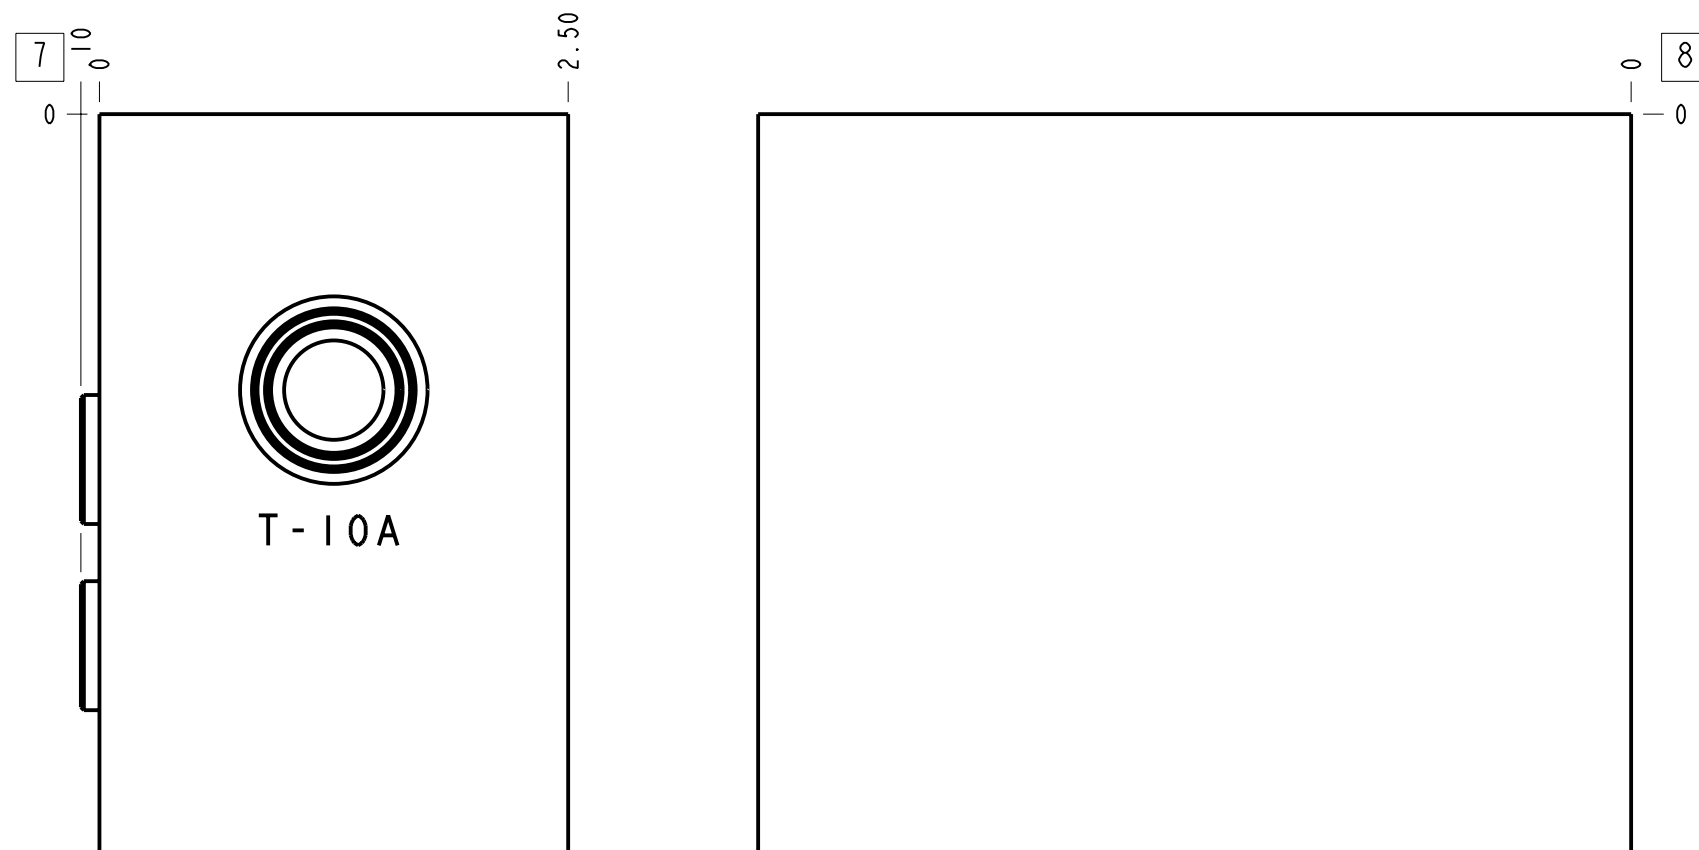

Technical Data	U.S. Units	Metric Units
Cavity	T-10A	
Body Features	Cross port with gauge ports	
Body Type	Motor mount	
Interface	Staffa B010	
Open Cavity Quantity	2	
Weight	3.221 lb.	1,461 kg.
Mounting Hole Diameter	.42 in.	10,7 mm
Mounting Hole Depth	Through	
Mounting Hole Quantity	8	
Mounting Hole C'bore Diameter	.69 in.	17,5 mm
Mounting Hole C'bore Depth	.59 in.	15,0 mm

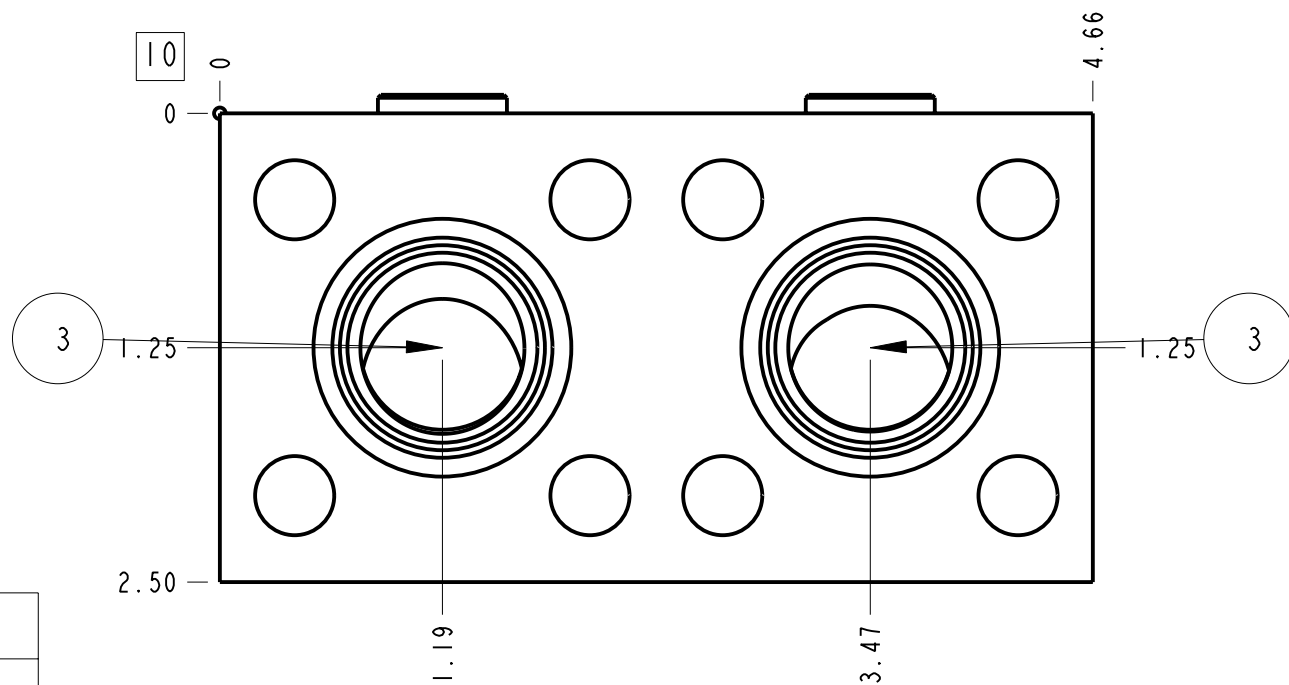

Notes

- Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
- This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
X5U	Ports V1 & V2	SAE 12
X5U	Ports G1 & G2 (Plugged)	SAE 6

3	500-001-123		N-0674-70	O-RING	2
2	A330-006-006			SAE-6 PLUG	2
1	158-037-004		6061-T6 ALUMINUM	BODY	1
I T E M	PART NO.	SETTING	MATERIAL	PART NAME	Q T Y
MODEL			X5U		
DESCRIPTION			T-10A Motor mount Staffa B010 Cross port with gauge ports		
DATE			Dec-04-23	SCALE	0.977
DWG SIZE			C	SHEET	1
FIRST ANGLE			THIRD ANGLE		
SUN hydraulics®					