


CONFIGURATION

X	Control	-
X	Adjustment Range	-
N	Seal Material	Buna-N
(none)	Material/Coating	

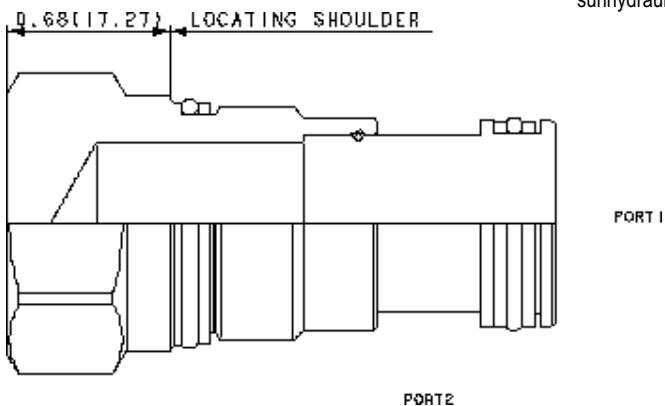

This cavity plug blocks all ports.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-5A
Series	2
Maximum Operating Pressure	5000 psi
Port Configuration	2 Port
Valve Hex Size	1 1/8 in.
Valve Installation Torque	45 - 50 lbf ft
Seal kit - Cartridge	Buna: 990003007
Seal kit - Cartridge	Viton: 990003006
Model Weight	0.38 lb.

CONFIGURATION OPTIONS

Model Code Example: XDCAXXN

CONTROL	(X)	ADJUSTMENT RANGE	(X)	SEAL MATERIAL	(N)	MATERIAL/COATING
X -		X -		N Buna-N V Viton		Standard Material/Coating /AP Stainless Steel, Passivated /LH Mild Steel, Zinc-Nickel

TECHNICAL FEATURES

- Corrosion resistant cavity plugs are intended for use in corrosive environments and are identified by the model code suffix /AP (see CONFIGURATION section). The bodies of these plugs are made from high strength lean duplex stainless steel. Internal parts are made from carbon steel leaded alloy, the same as standard plugs.

RELATED MODELS

- [XDCAE](#) Port 1 to external port, port 2 blocked cavity plug