




CONFIGURATION

8	Control	T-8A Cavity
X	Adjustment Range	-
N	Seal Material	Buna-N
(none)	Material/Coating	

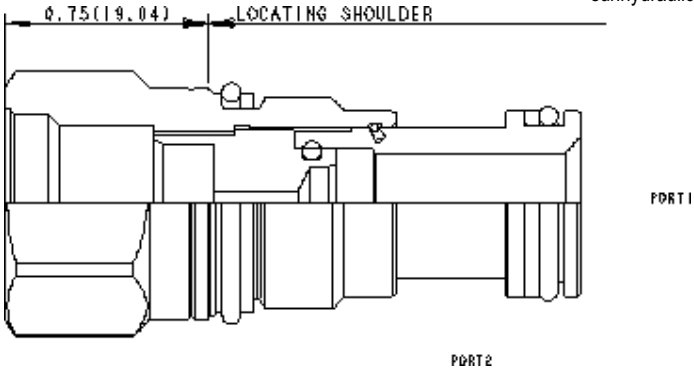

Sun offers a selection of cavity adaptors used to convert one cavity to another. When installed in a Sun T-13 A cavity, this adaptor converts to a Sun T-8A cavity.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-13A
Series	1
Maximum Operating Pressure	5000 psi
Pilot Control Cavity	T-8A
Valve Hex Size	7/8 in.
Valve Installation Torque	30 - 35 lbf ft
Seal kit - Cartridge	Buna: 990010007
Seal kit - Cartridge	Polyurethane: 990010002
Seal kit - Cartridge	Viton: 990010006
Model Weight	0.18 lb.

CONFIGURATION OPTIONS

Model Code Example: XGAA8XN

CONTROL	(8)	ADJUSTMENT RANGE	(X)	SEAL MATERIAL	(N)	MATERIAL/COATING
8 T-8A Cavity		X -		N Buna-N V Viton		Standard Material/Coating /AP Stainless Steel, Passivated