

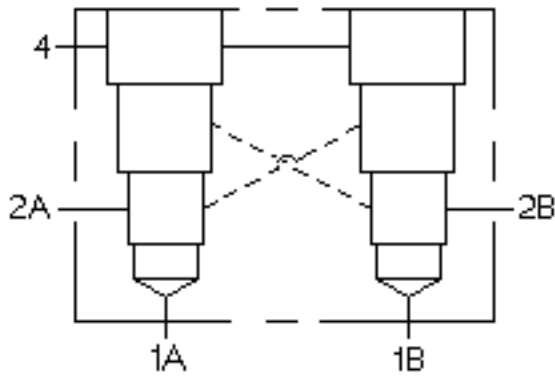
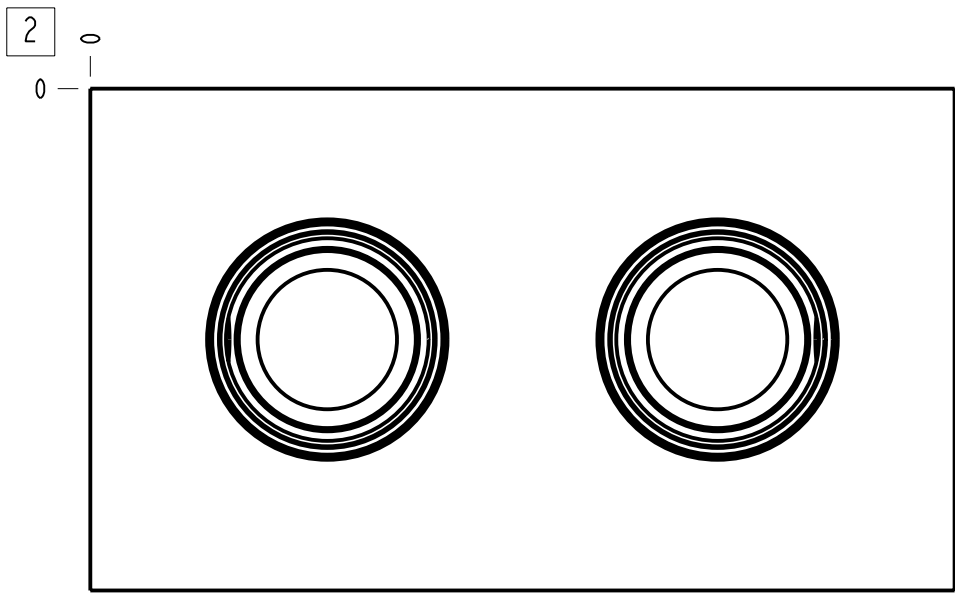
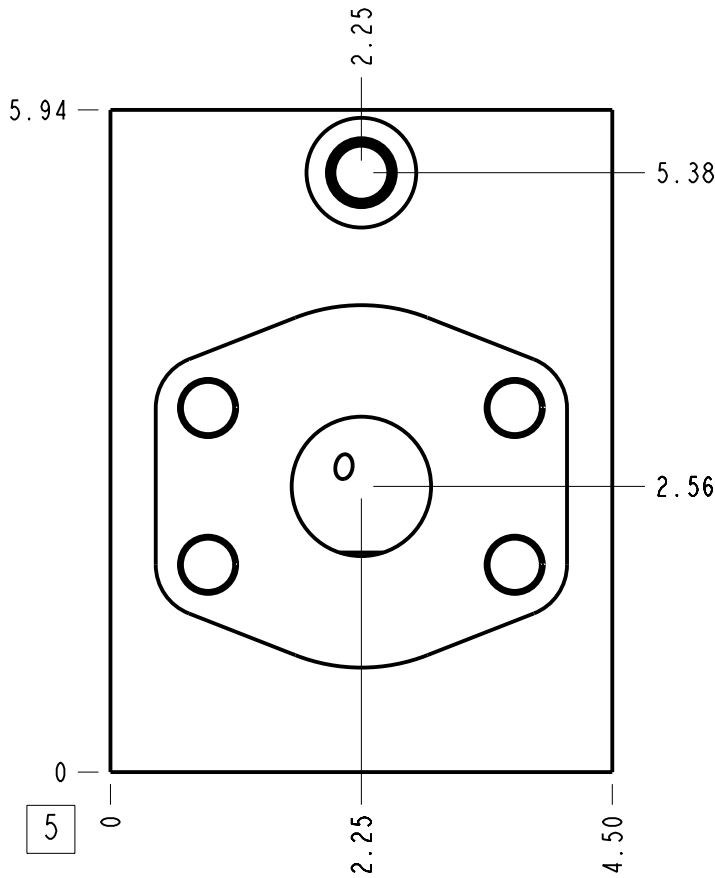
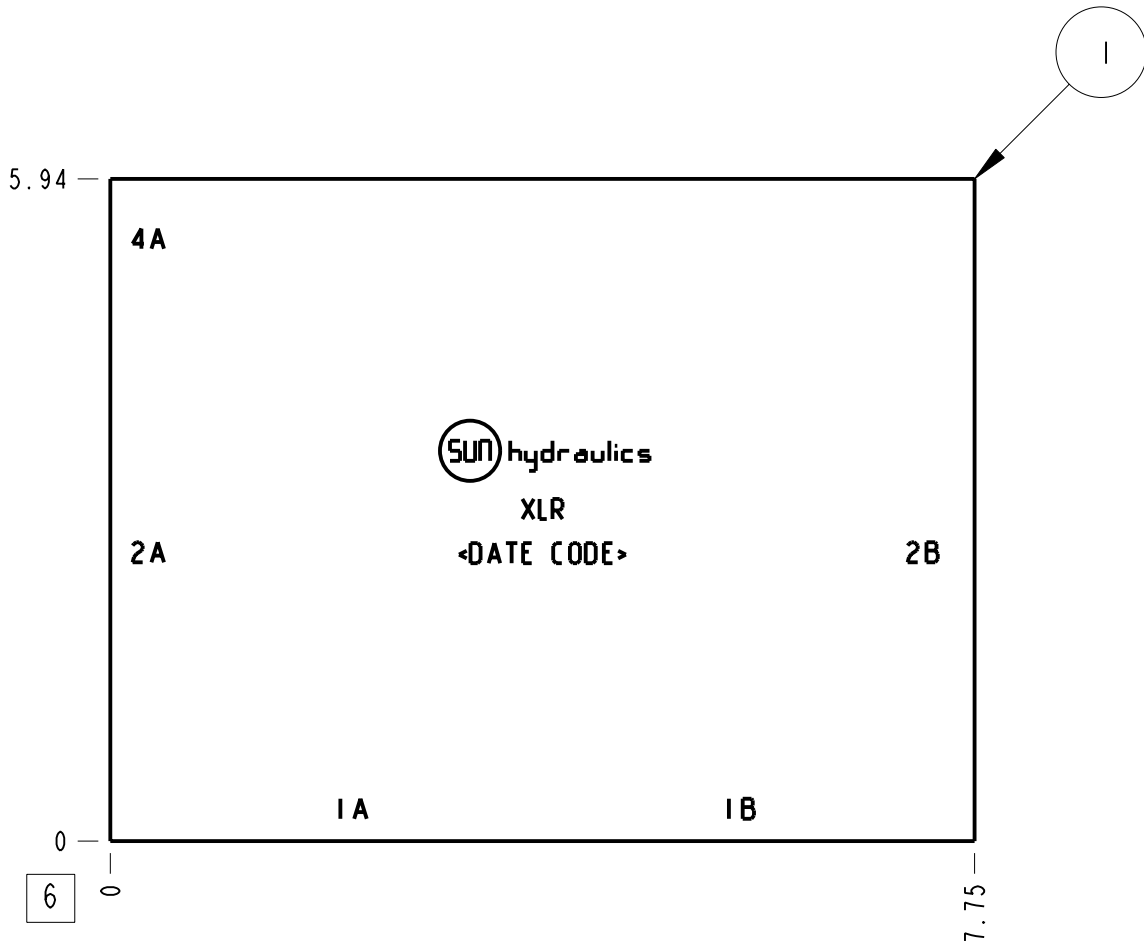


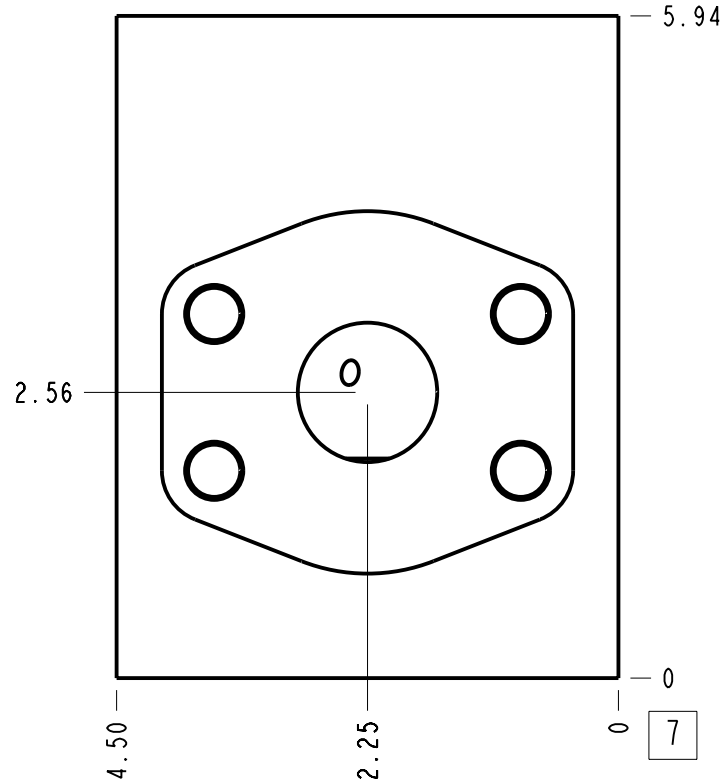


Technical Data	U.S. Units	Metric Units
Cavity	T-24A	
Body Features	Cross pilot with common port 4s	
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	2	
Weight	16.513 lb.	7,490 kg.
Mounting Hole Thread	.375-16 UNC - 2B in.	
Mounting Hole Depth	.62 in.	15,7 mm
Mounting Hole Quantity	2	

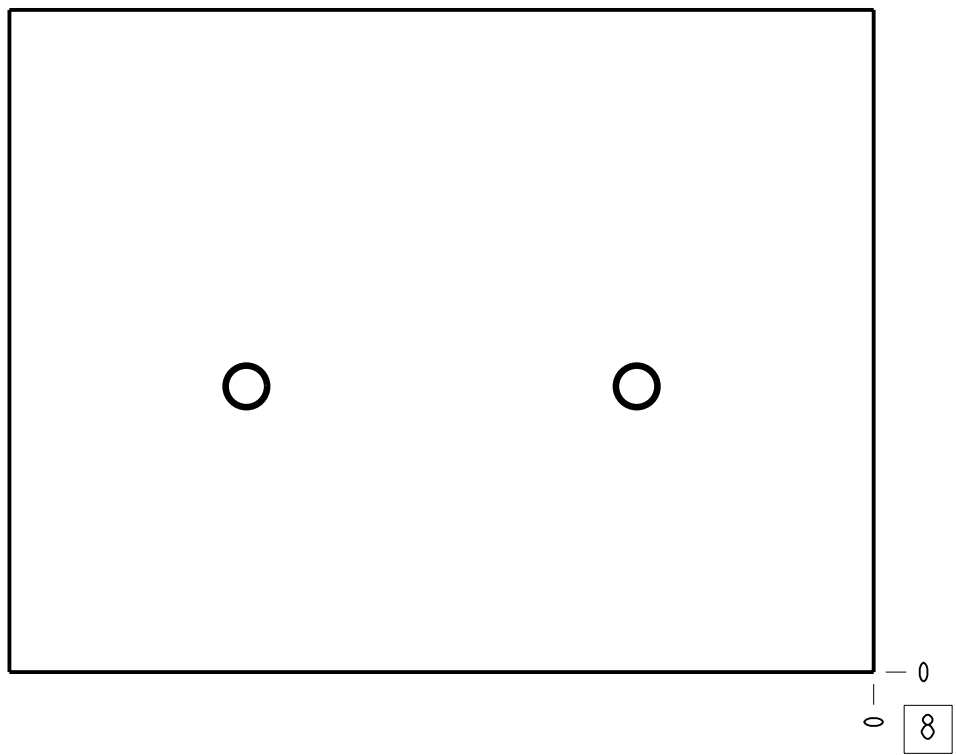

Notes

- Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
- Flange mounting hole data: Inch: 1/2-13 UNC x 1.06 (26,9 mm) DP, Metric: M12 x 1.75-6H x 1.06 (26,9 mm) DP
- This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

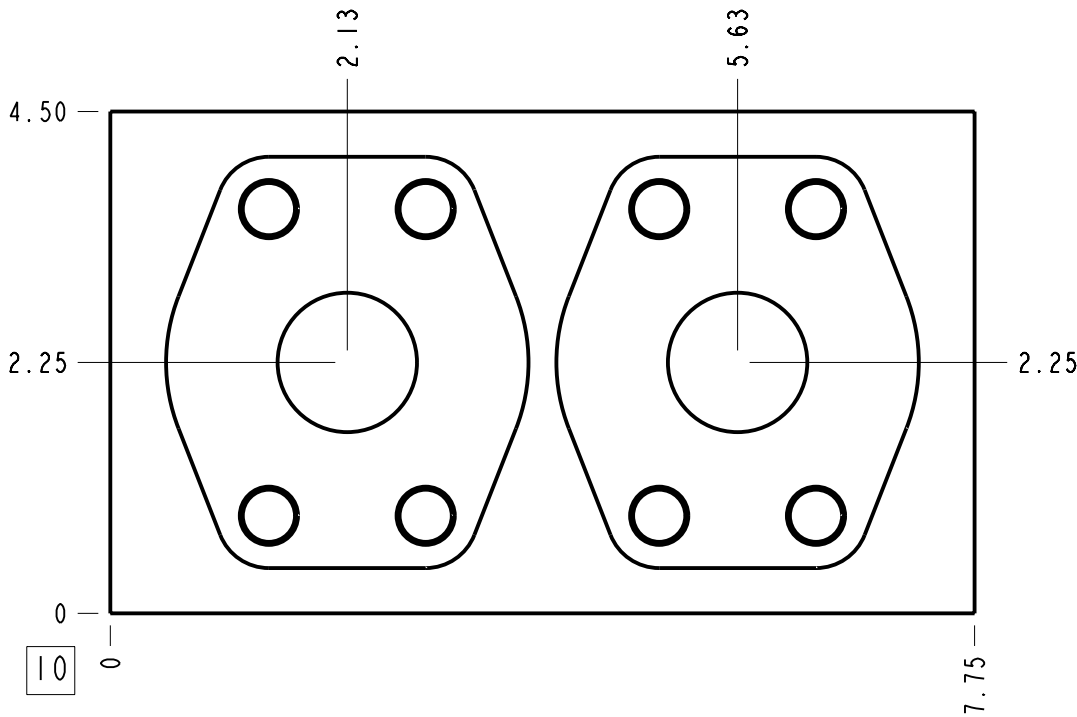

Port Headings		
Product	Port	Size
XLR	Ports 1A,1B,2A,2B	1/2 in. Code 61
XLR	Port 4	SAE 6

I	152-255-001		6061-T6 ALUMINUM	BODY		
I T E M	PART NO.	SETTING	MATERIAL	PART NAME		
MODEL			ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE		FIRST ANGLE	THIRD ANGLE
XLR						
DESCRIPTION			DATE	SCALE	DWG SIZE	SHEET
T-24A Line mount Cross pilot with common port 4s			Jun-18-25	0.581	C	I
						