





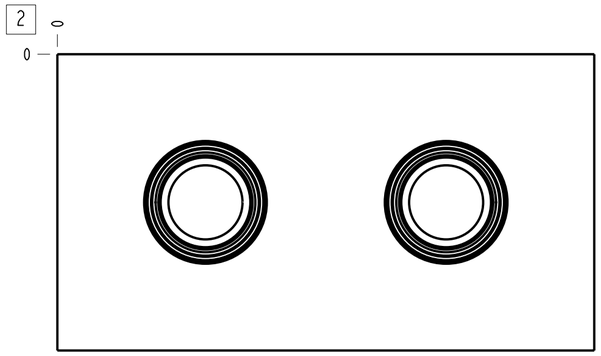


Technical Data	U.S. Units	Metric Units
Cavity	T-23A	
Body Features	Cross pilot with common port 4s	
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	2	
Weight	10.682 lb.	4,845 kg.
Mounting Hole Thread	.375-16 UNC - 2B in.	
Mounting Hole Depth	.62 in.	15,7 mm
Mounting Hole Quantity	2	

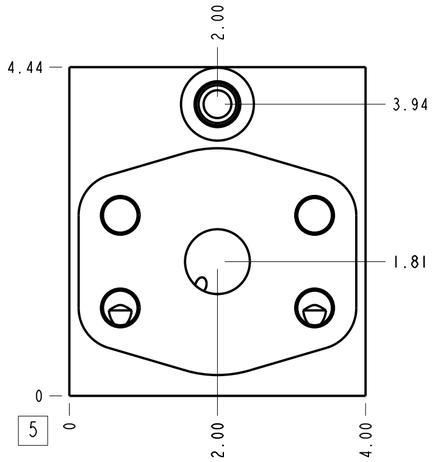

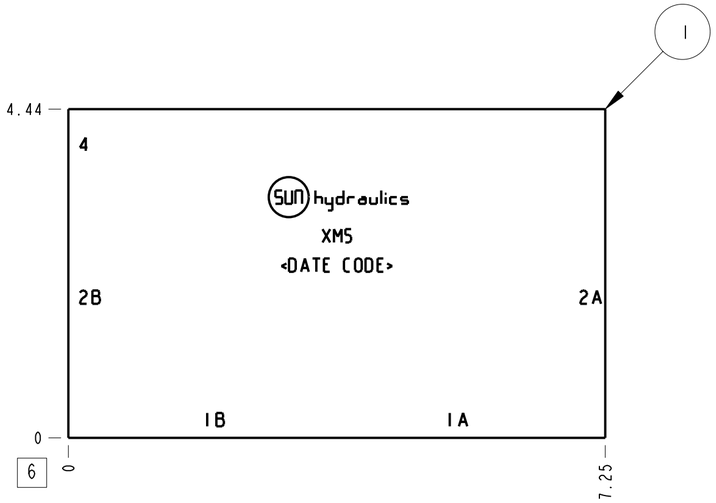


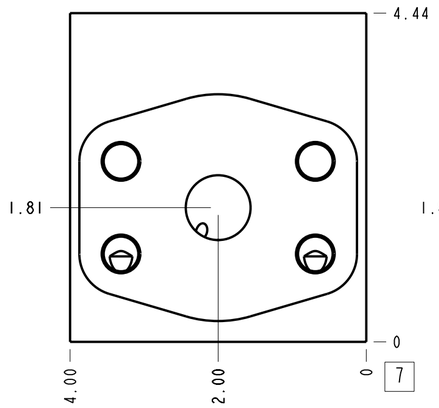

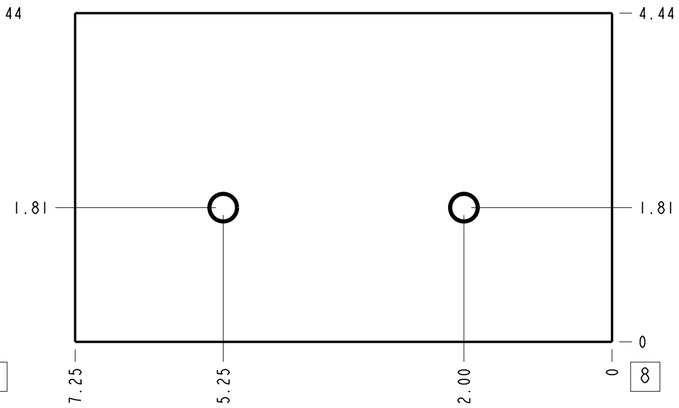

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. 1.25" SAE Flange mounting hole data: Inch: 1/2-13UNC x 1.00 (25,4 mm) DP, Metric: M14 x 2.0-6H x 1.00 (25,4 mm) DP
3. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

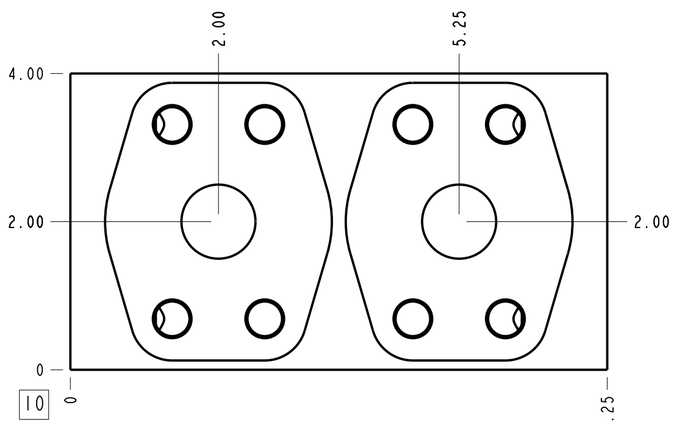

Port Headings		
Product	Port	Size
XM5	Ports 1A, 1B, 2A, 2B	1-1/4" C62
XM5	Port 4	SAE 6

ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY
1	152-252-001		6061-T6 ALUMINUM	BODY	1

MODEL: XM5	ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE			FIRST ANGLE / THIRD ANGLE
DESCRIPTION: T-23A Line mount Cross pilot with common port 4s	DATE: May-28-24	SCALE: 0.632	DWG SIZE: C	SHEET: 1

sun hydraulics