

MODEL
XMOB

All ports open cavity plug
SERIES 1 / CAVITY: T-21A & T-61A

sunhydraulics.com/model/XMOB



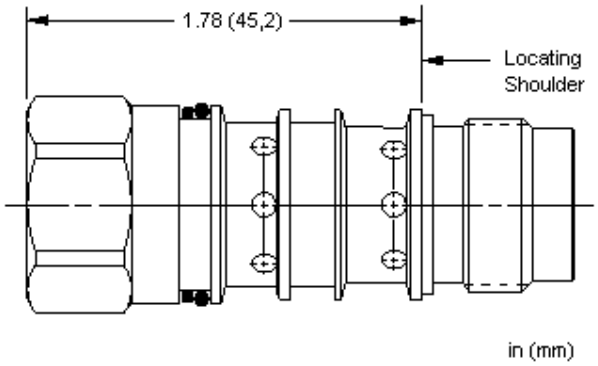

CONFIGURATION

X	Control	-
X	Adjustment Range	-
N	Seal Material	Buna-N

These cavity plugs can be used for both four-port and six-port cavities. In both cases, all ports remain open.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-21A & T-61A
Series	1
Maximum Operating Pressure	3000 psi
Valve Hex Size	7/8 in.
Valve Installation Torque	30 - 35 lbf ft
Seal kit - Cartridge	Buna: 990021007
Seal kit - Cartridge	Polyurethane: 990021002
Seal kit - Cartridge	Viton: 990021006
Model Weight	0.21 lb.

CONFIGURATION OPTIONS

Model Code Example: XMOBXXN

CONTROL (X)	ADJUSTMENT RANGE (X)	SEAL MATERIAL (N)
X -	**X** -	**N** Buna-N
		V Viton

© 2026 Sun Hydraulics