




CONFIGURATION

N	Control	T-22A Cavity
X	Adjustment Range	-
N	Seal Material	Buna-N
(none) Material/Coating		

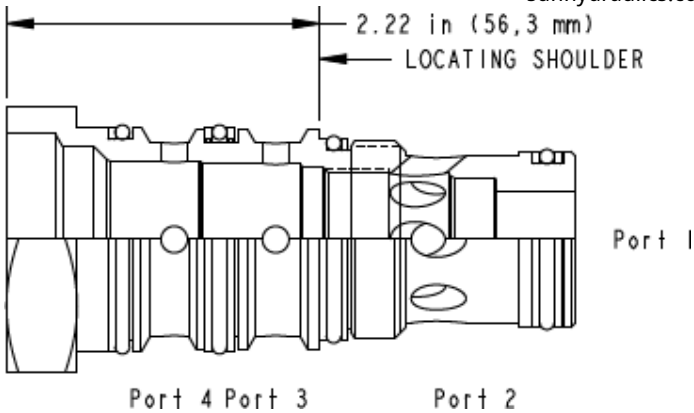

Sun offers a selection of cavity adaptors used to convert one cavity to another. Depending on the configuration, this cavity adaptor converts a Sun T-23A cavity to either a Sun T-21A or T-22A cavity.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-23A
Series	3
Maximum Operating Pressure	5000 psi
Valve Hex Size	1 7/8 in.
Valve Installation Torque	150 - 160 lbf ft
Seal kit - Cartridge	Buna: 990023007
Seal kit - Cartridge	Polyurethane: 990023002
Seal kit - Cartridge	Viton: 990023006
Model Weight	0.80 lb.

CONFIGURATION OPTIONS

Model Code Example: XPOCNXN

CONTROL	(N)	ADJUSTMENT RANGE	(X)	SEAL MATERIAL	(N)	MATERIAL/COATING
N T-22A Cavity		X -		N Buna-N		Standard Material/Coating
M T-21A Cavity				V Viton		/AP Stainless Steel, Passivated