
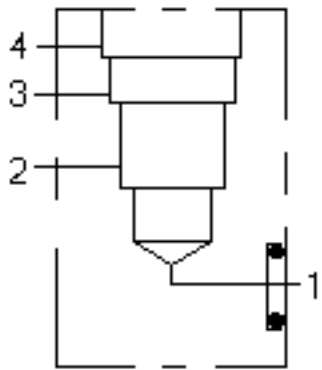
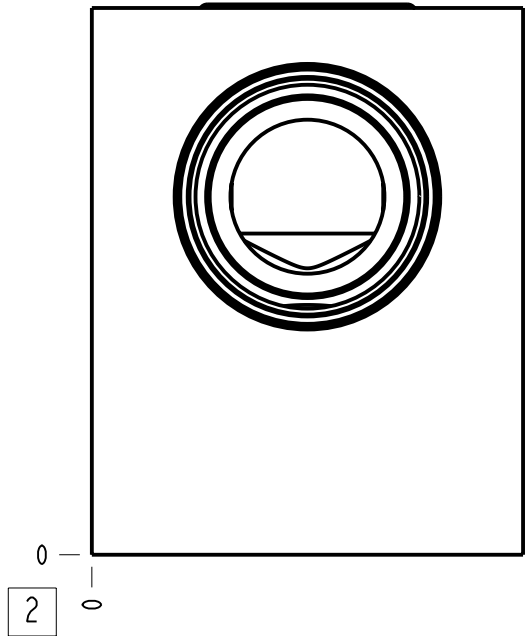

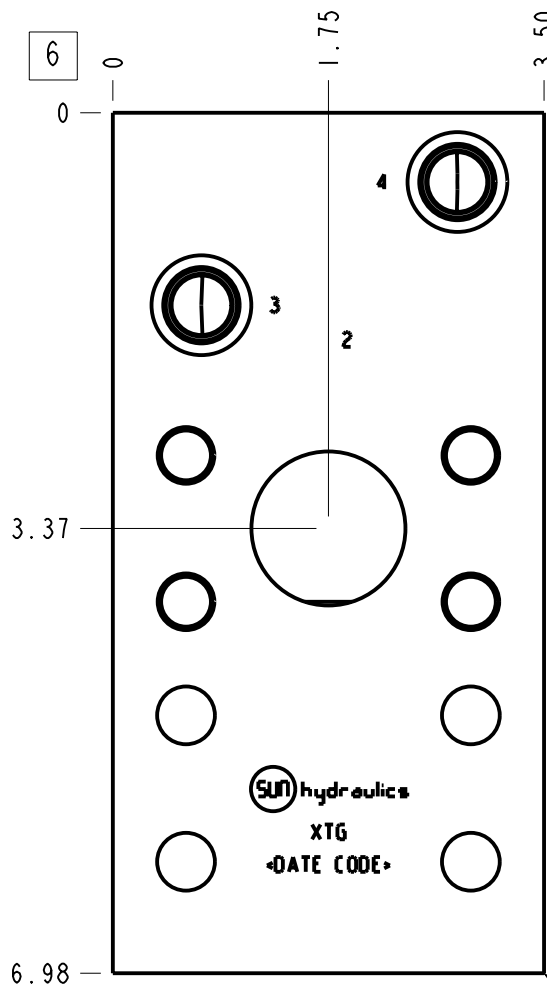



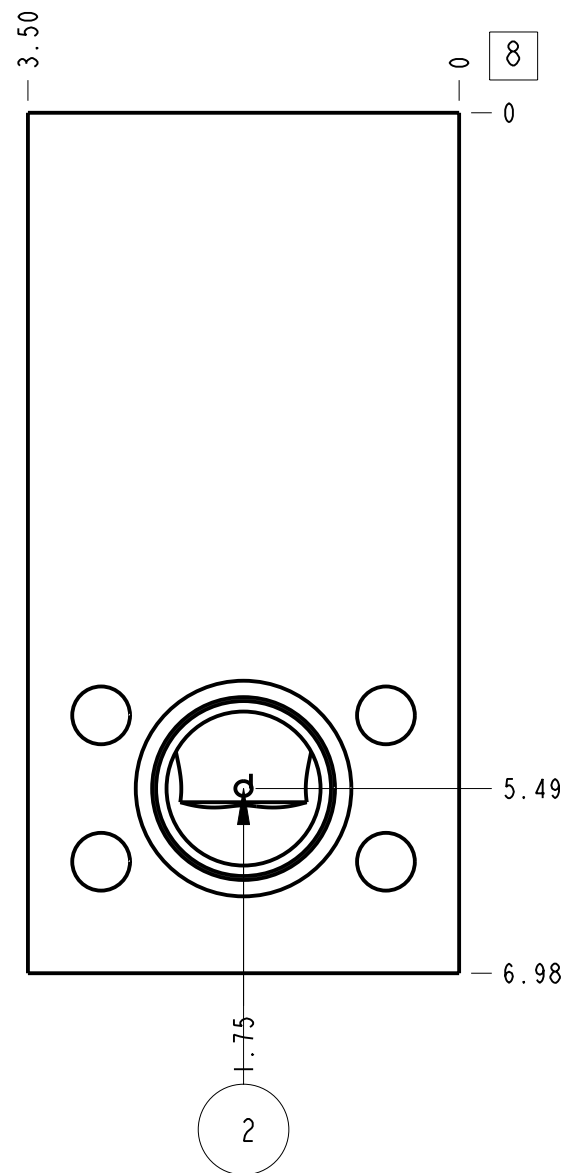


Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
XTG	Ports 1 & 2	1 1/4" C6I
XTG	Ports 3 & 4	SAE 6

Technical Data	U.S. Units	Metric Units
Cavity	T-24A	
Body Features	Direct mount	
Body Type	Line mount	
Interface	1.25 SAE C6I	
Open Cavity Quantity	1	
Weight	8.278 lb.	3,755 kg.
Mounting Hole Diameter	.47 in.	12 mm
Mounting Hole Thread	.438-14 UNC - 2B	
Mounting Hole Depth	1.12 in.	

2	500-001-222		N-0674-70	O-RING	1
1	153-703-001		6061-T6 ALUMINUM	BODY	1
ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY
MODEL			XTG		ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE
DESCRIPTION			T-24A Line mount 1.25 SAE C6I Direct mount		
DATE		SCALE	DWG SIZE	SHEET	FIRST ANGLE THIRD ANGLE  
May-29-26		0.642	C	1	