



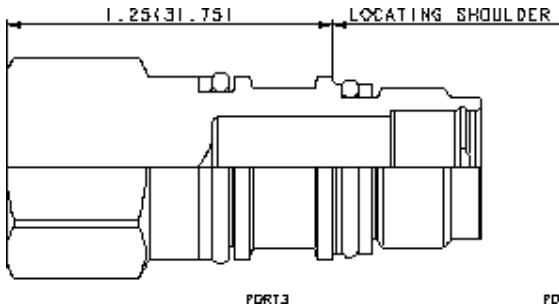

CONFIGURATION

X	Control	-
X	Adjustment Range	-
N	Seal Material	Buna-N
(none) Material/Coating		

This cavity plug allows ports 1 and 2 to remain open and blocks port 3.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-163A
Series	0
Maximum Operating Pressure	5000 psi
Port Configuration	3 Port
Valve Hex Size	3/4 in.
Valve Installation Torque	20 - 25 lbf ft
Seal kit - Cartridge	Buna: 990163007
Seal kit - Cartridge	Polyurethane: 990163002
Seal kit - Cartridge	Viton: 990163006
Model Weight	0.15 lb.

CONFIGURATION OPTIONS

Model Code Example: **XZOBXXN**

CONTROL	(X)	ADJUSTMENT RANGE	(X)	SEAL MATERIAL	(N)	MATERIAL/COATING
X -		X -		N Buna-N		Standard Material/Coating
				E EPDM		/AP Stainless Steel, Passivated
				V Viton		