
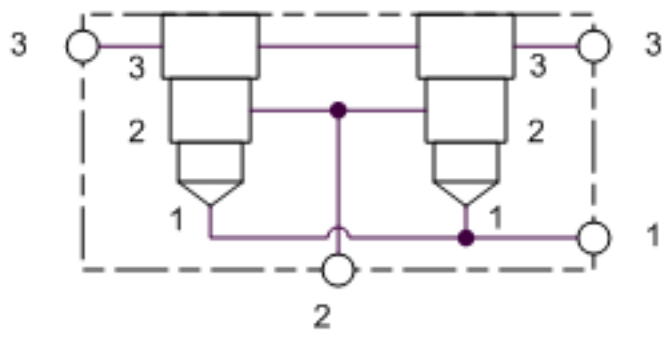
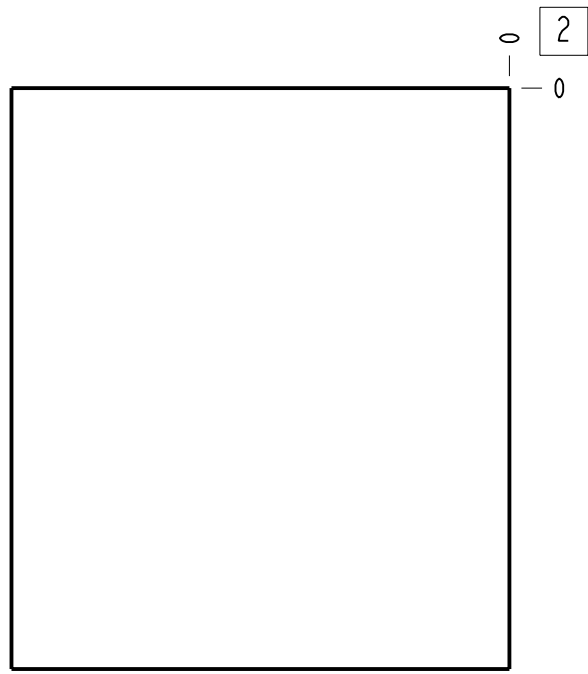

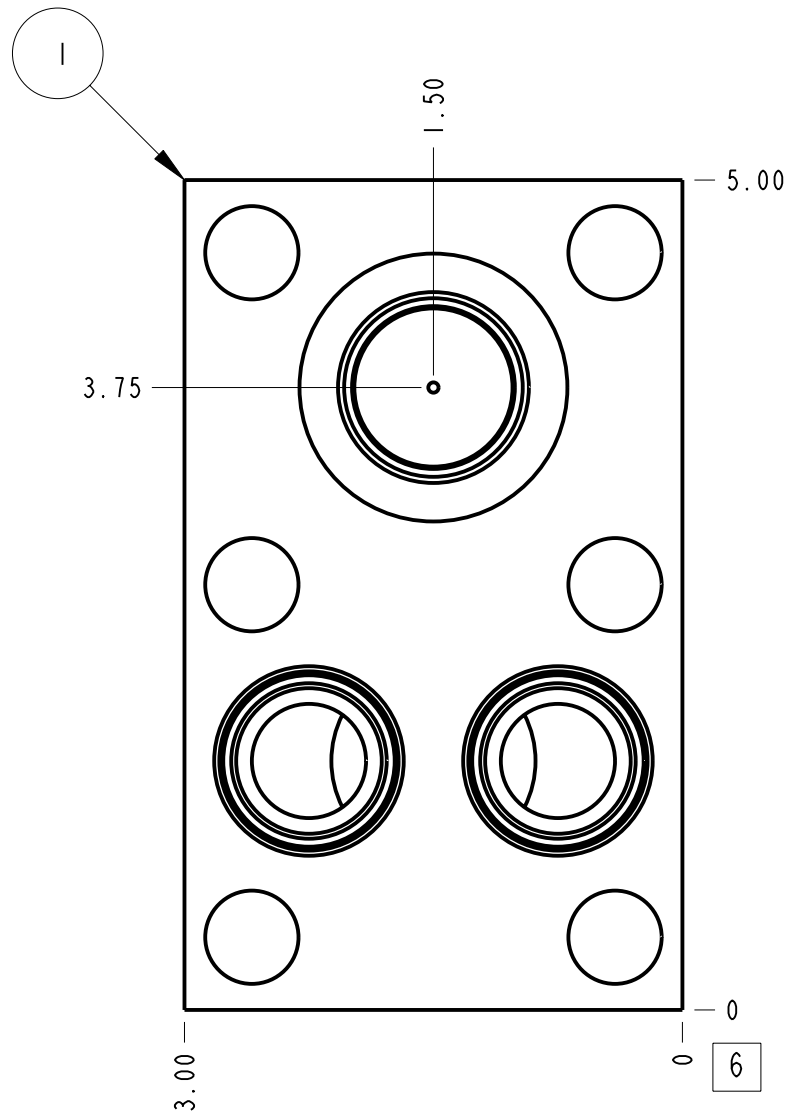
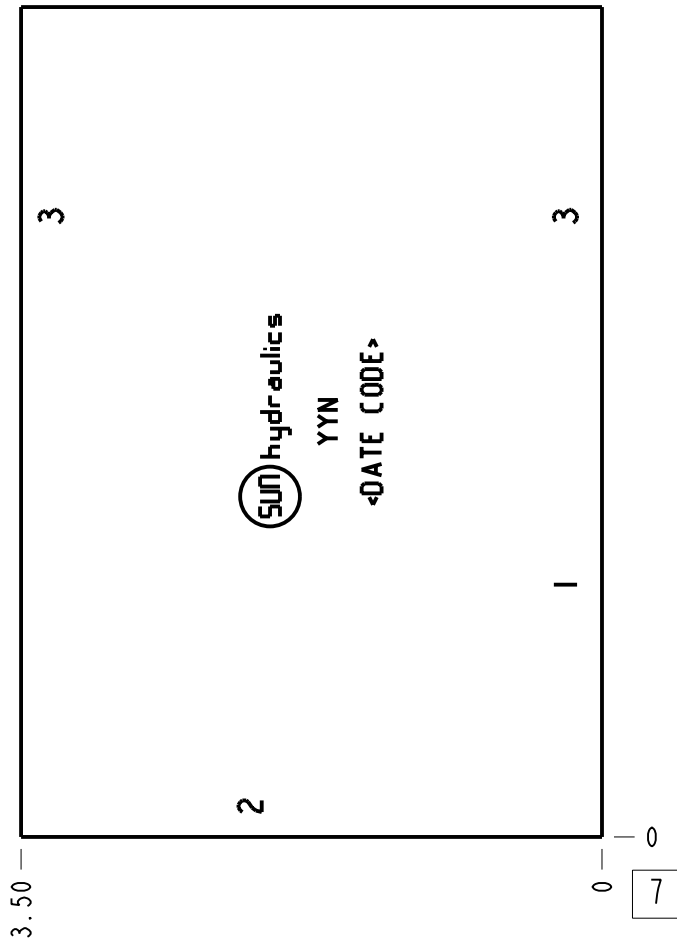
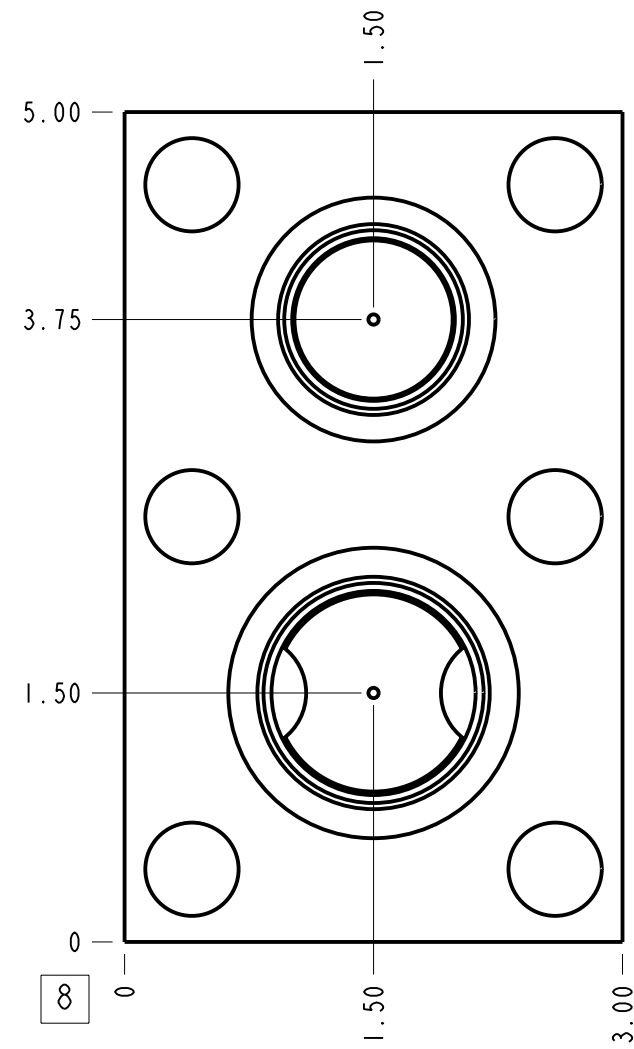


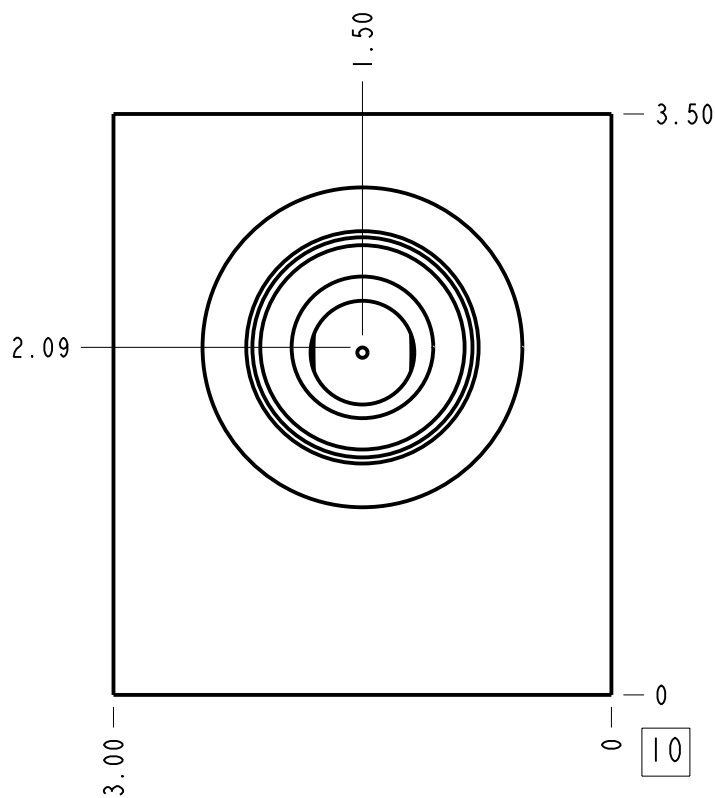

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
YYN	Ports 1 & 2	SAE 16
YYN	Port 3	SAE 12

Technical Data	U.S. Units	Metric Units
Cavity	T-2A	
Body Features	Direct mount, parallel cavities	
Body Type	Line mount	
Interface	Special - 6 bolt	
Open Cavity Quantity	2	
Weight	5.250 lb.	2,381 kg.
Mounting Hole Diameter	.56 in.	14,2 mm
Mounting Hole Depth	Through	
Mounting Hole Quantity	6	

I	151-569		6061-T6 ALUMINUM	BODY	I
I T E M	PART NO.	SETTING	MATERIAL	PART NAME	Q T Y
MODEL			ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE		FIRST ANGLE THIRD ANGLE
DESCRIPTION			DATE	SCALE	
T-2A Line mount Special - 6 bolt Direct mount, parallel cavities			Aug-02-23	0.864	DWG SIZE C
					SHEET 1
SUN hydraulics®					