






Technical Data	U.S. Units	Metric Units
Cavity	T-16A	
Body Features	Sandwich mount through port	
Body Type	Line mount	
Interface	1.50 SAE C61	
Open Cavity Quantity	1	
Weight	5.215 lb.	2,366 kg.
Mounting Hole Diameter	.53 in.	13,5 mm
Mounting Hole C'bore Diameter	.78 in.	19,8 mm
Mounting Hole C'bore Depth	.47 in.	12 mm

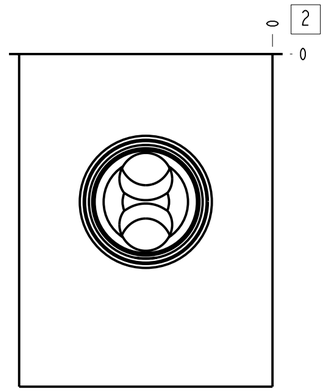

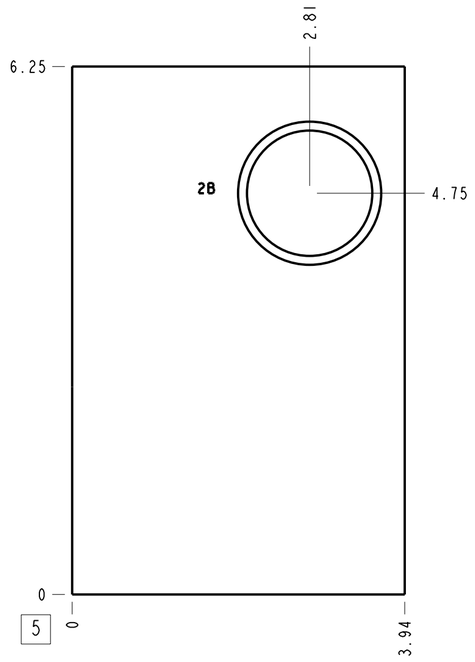

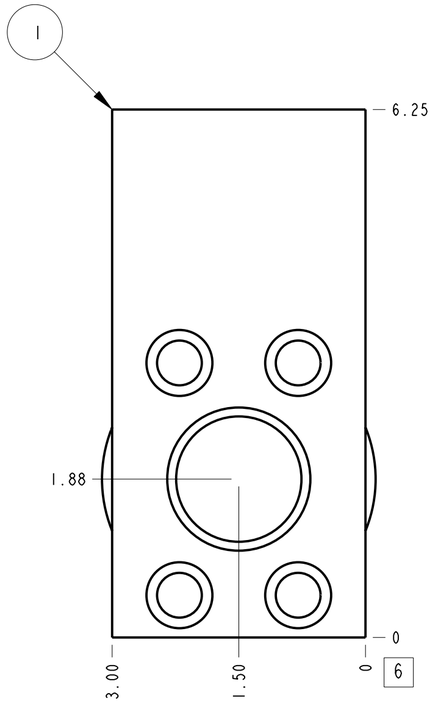


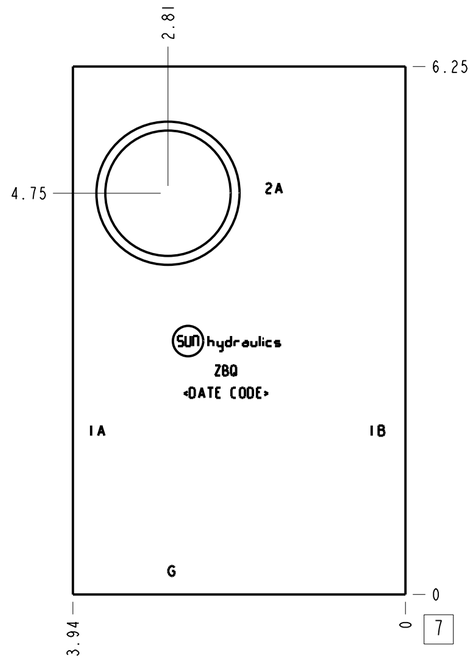

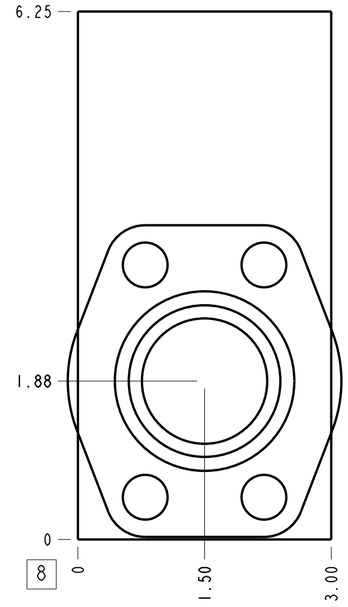

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.
3. Items without balloons are shipped loose.

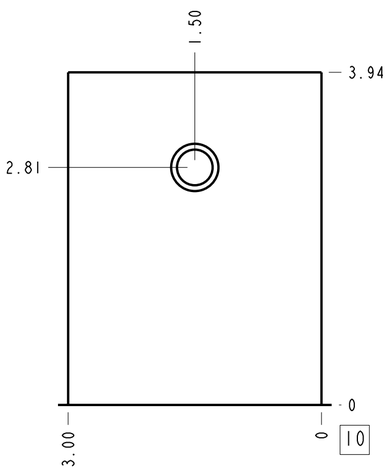

Port Headings		
Product	Port	Size
ZBQ	Flange Port 1	1/2 in. Code 61
ZBQ	Threaded Ports 1 & 2	1 1/4" NPTF
ZBQ	Gage Port	1/4" NPTF

ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY
2	500-001-225			O-RING	1
1	151-904-001		6061-T6 ALUMINUM	BODY	1

MODEL: ZBQ	ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE			FIRST ANGLE / THIRD ANGLE	
DESCRIPTION: T-16A Line mount 1.50 SAE C61 Sandwich mount through port	DATE: Jul-25-25	SCALE: 0.721	DWG SIZE: C	SHEET: 1	sun hydraulics