
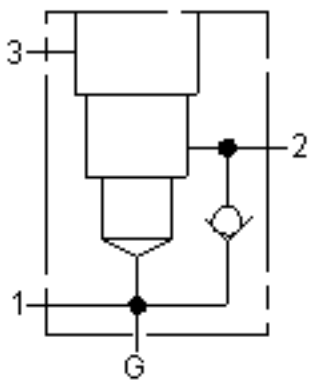
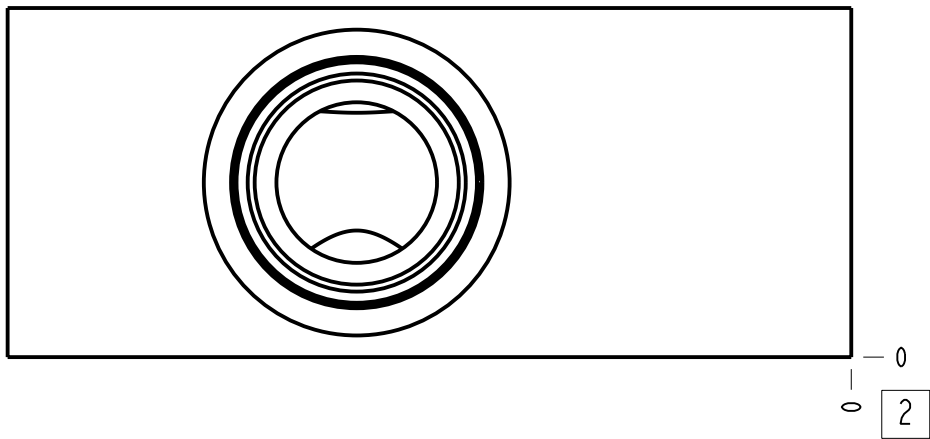
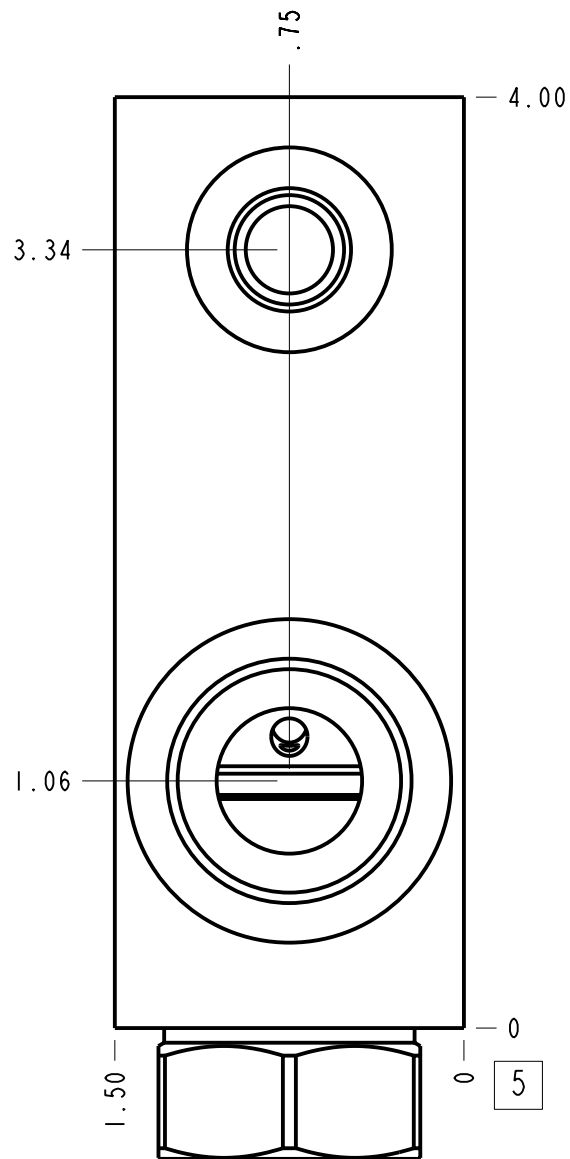
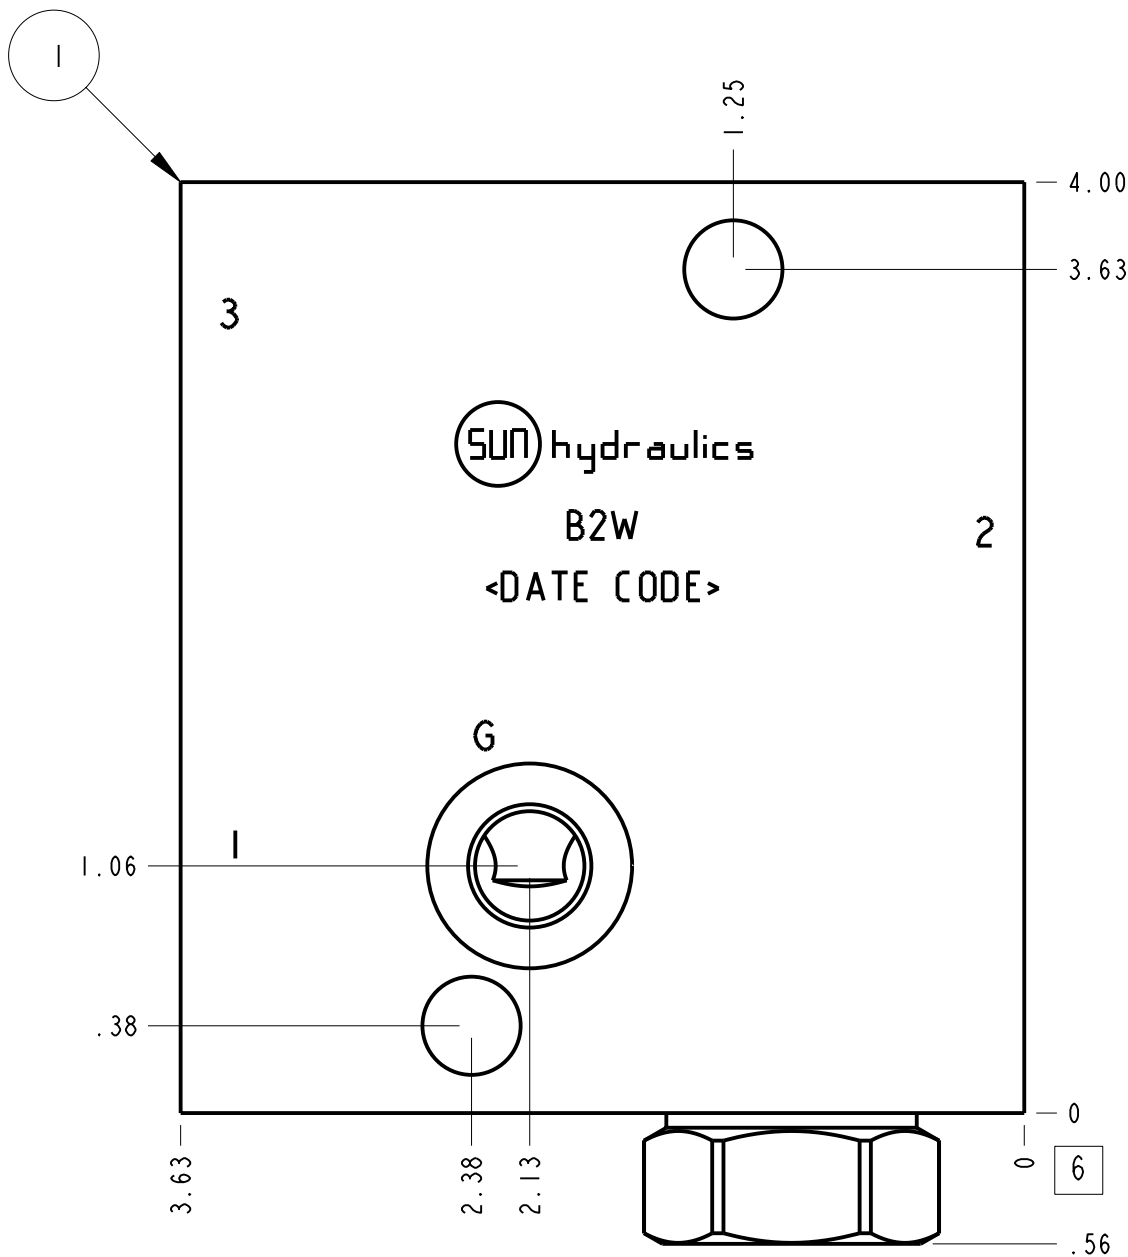
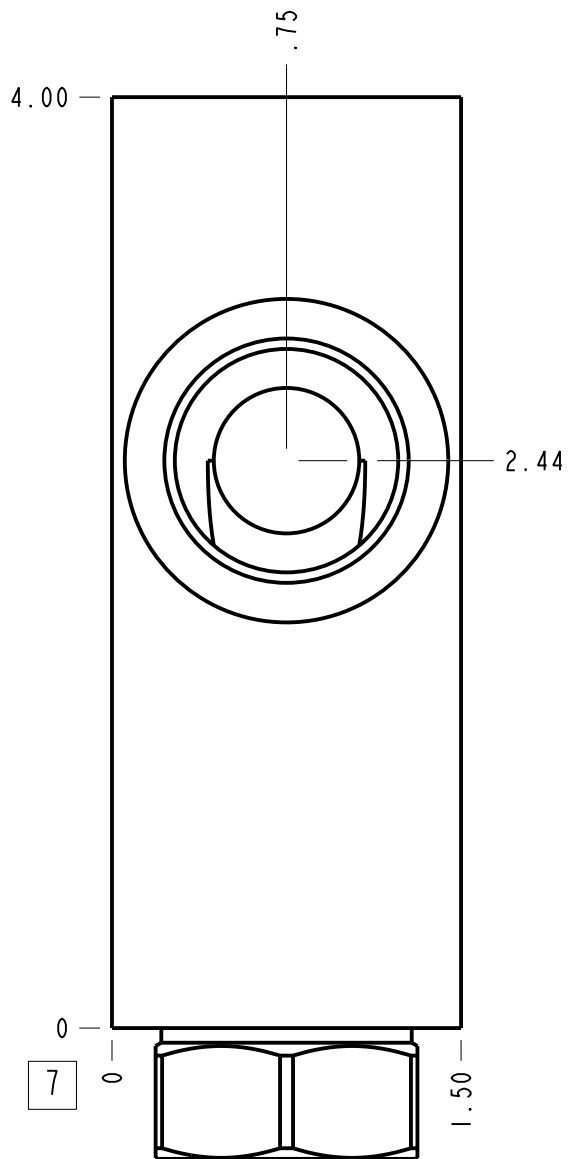


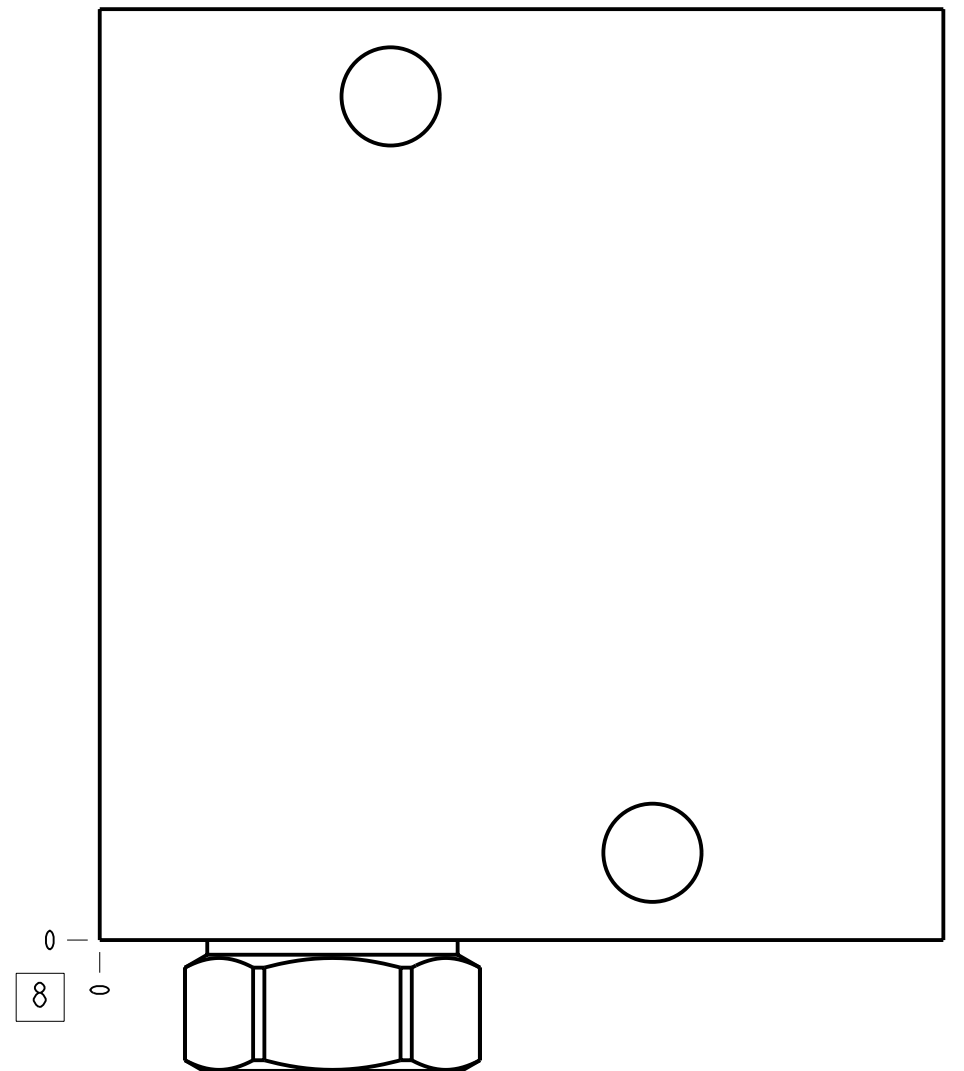

Notes

- Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
- This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
B2W	Ports 1 & 2	3/4" BSPP
B2W	Port 3	1/4" BSPP
B2W	Gage Port	1/4" BSPP

Technical Data	U.S. Units	Metric Units
Cavity	T-2A	
Body Features	Ninety degree with reverse flow check - reducing	
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	1	
Weight	1.902 lb.	0,863 kg.
Mounting Hole Diameter	.42 in.	10,7 mm
Mounting Hole Depth	Through	
Mounting Hole Quantity	2	
Includes integral cartridge(s)	Yes (see Included Components)	

2	CXED-XCN			CHECK VALVE	
1	151-021-019		6061-T6 ALUMINUM	BODY	
ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY
MODEL			ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE		<div><div>FIRST ANGLE</div><div>THIRD ANGLE</div></div>
DESCRIPTION			DATE	SCALE	DWG SIZE
T-2A Line mount (See Technical Data for Body Features)			May-05-25	1.212	C
					<div><div>SUN</div><div>hydraulics®</div></div>