
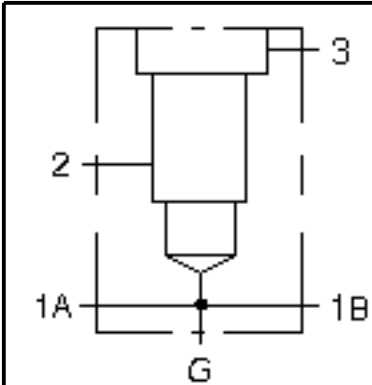
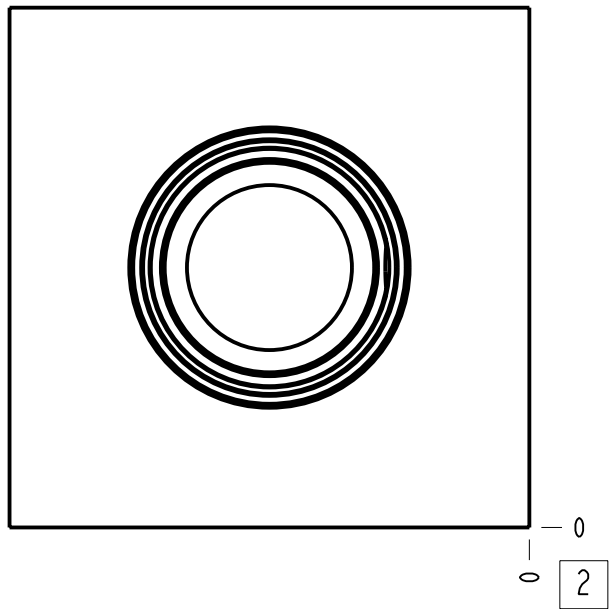
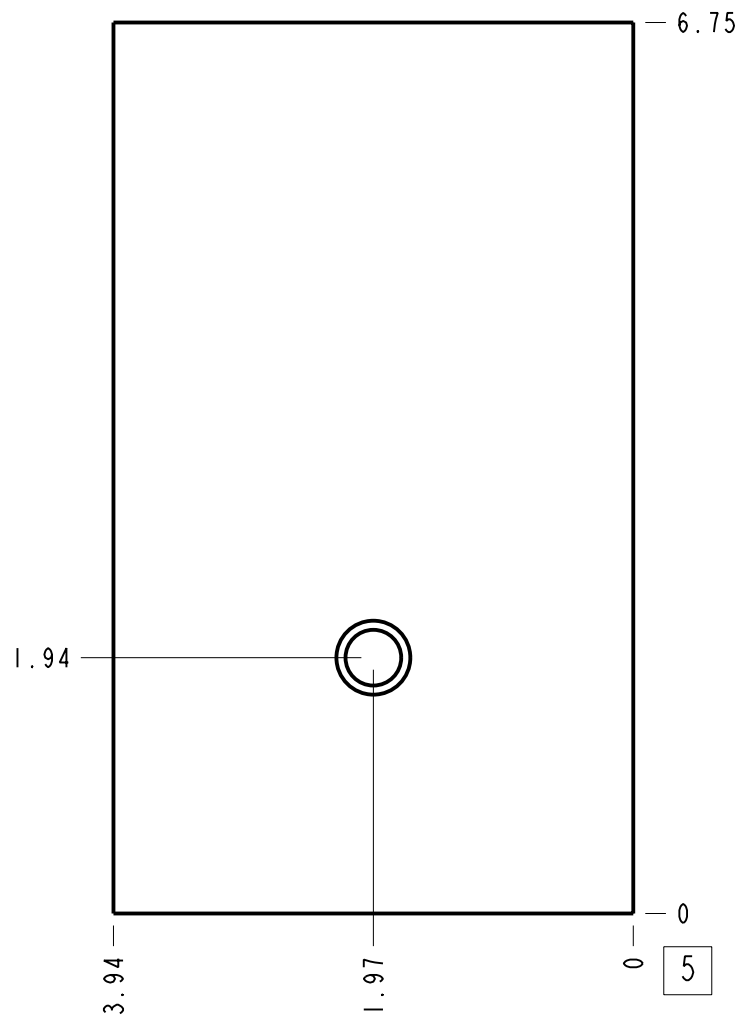
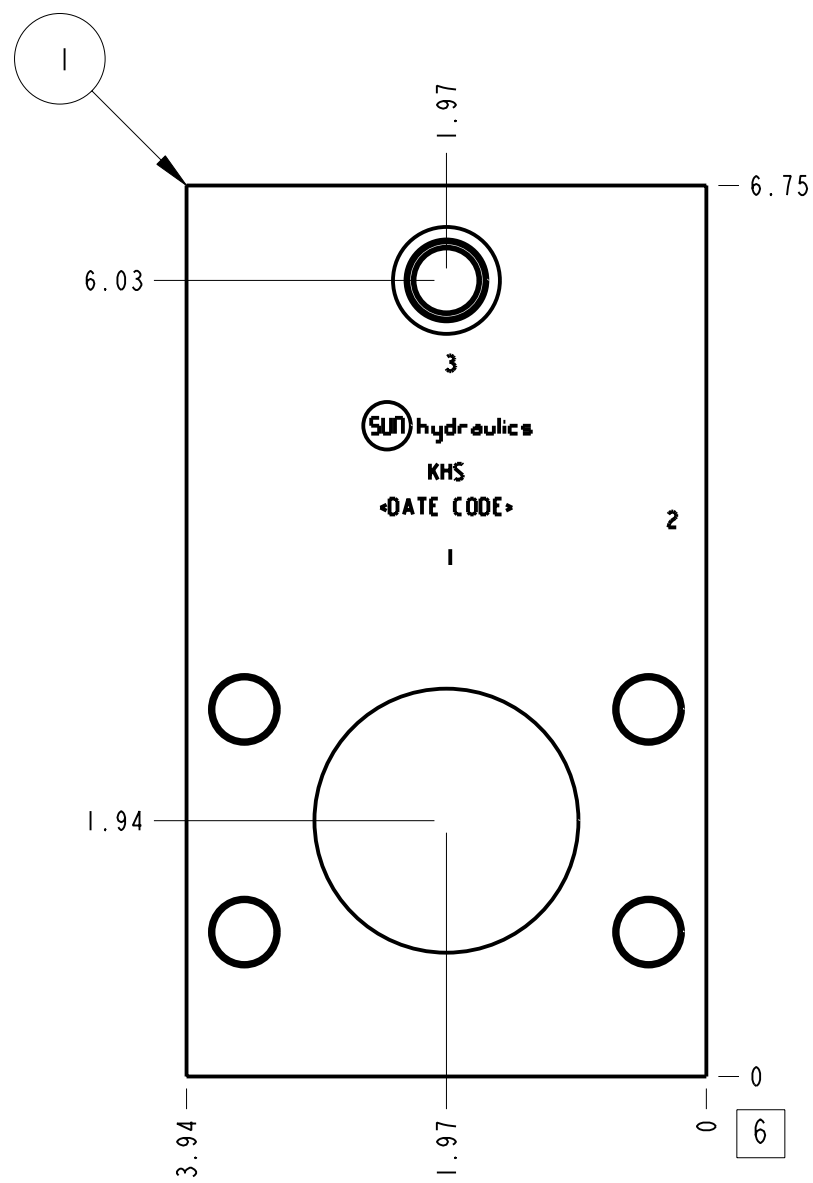
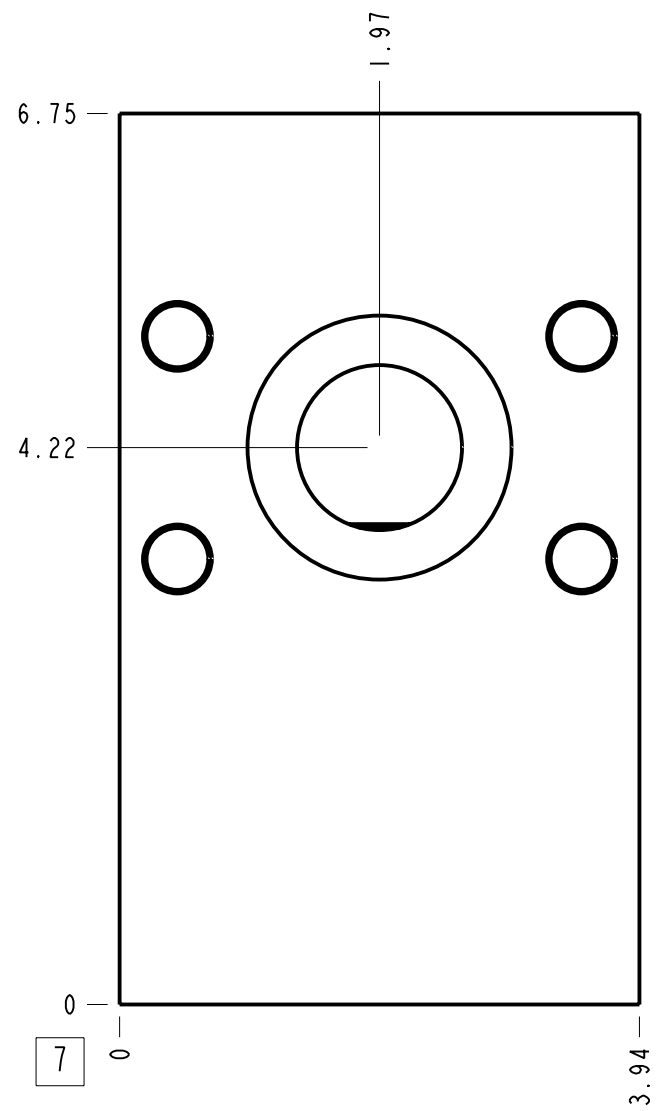
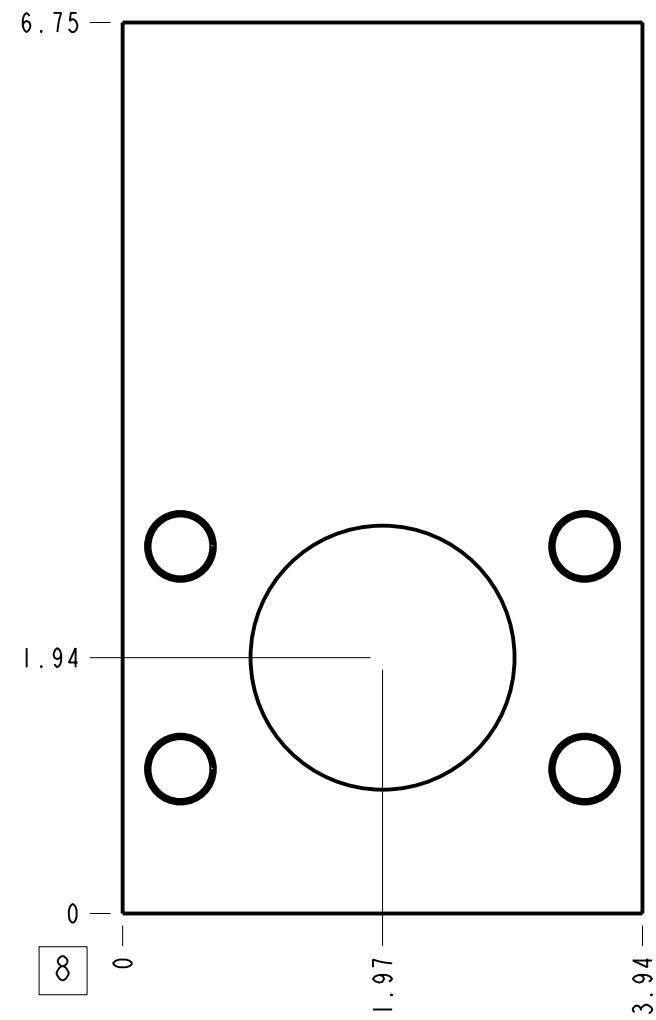


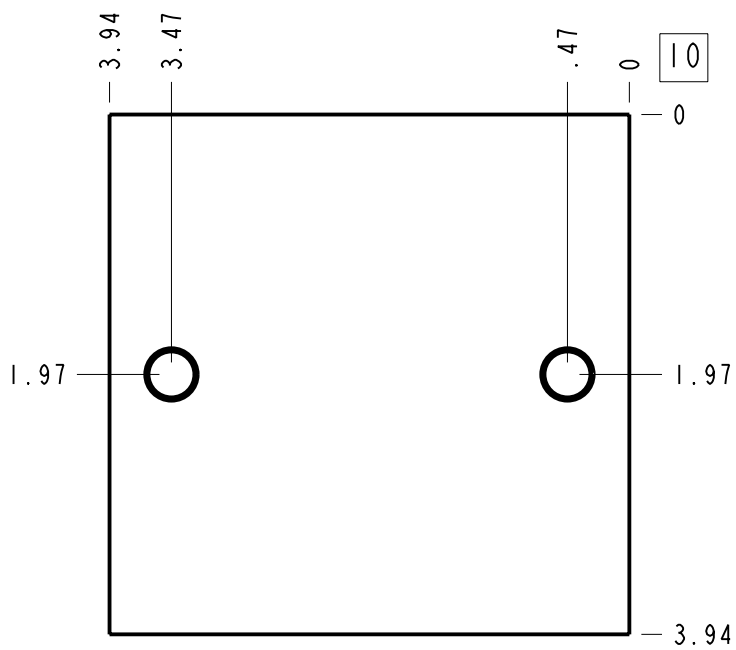

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. Flange mounting hole data: Inch: 1/2-13 UNC x 1.06 (26,9 mm) DP, Metric: M12 x 1.75-6H x 1.06 (26,9 mm) DP
3. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
KHS	Ports 1 & 2	2" Code 61
KHS	Port 3	SAE 6
KHS	Gage Port	1/4" NPTF

Technical Data	U.S. Units	Metric Units
Cavity	T-19A	
Body Features	Through port 1 with gauge port	
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	1	
Weight	7.384 lb.	3,350 kg.
Mounting Hole Thread	.375-16 UNC - 2B in.	
Mounting Hole Depth	.62 in.	15,7 mm
Mounting Hole Quantity	2	

I	151-354-001		6061-T6 ALUMINUM	BODY	I
I T E M	PART NO.	SETTING	MATERIAL	PART NAME	Q T Y
MODEL KHS			ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE		FIRST ANGLE THIRD ANGLE
DESCRIPTION T-19A Line mount Through port 1 with gauge port			DATE Jul-16-25	SCALE 0.687	DWG SIZE C
			SHEET 1	SUN hydraulics®	