
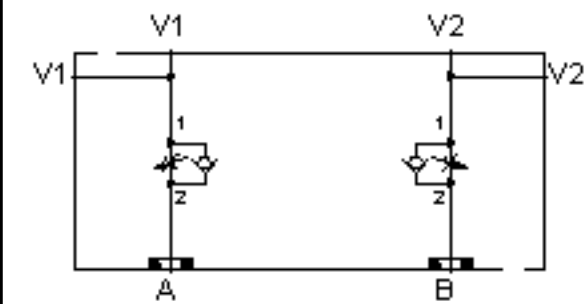
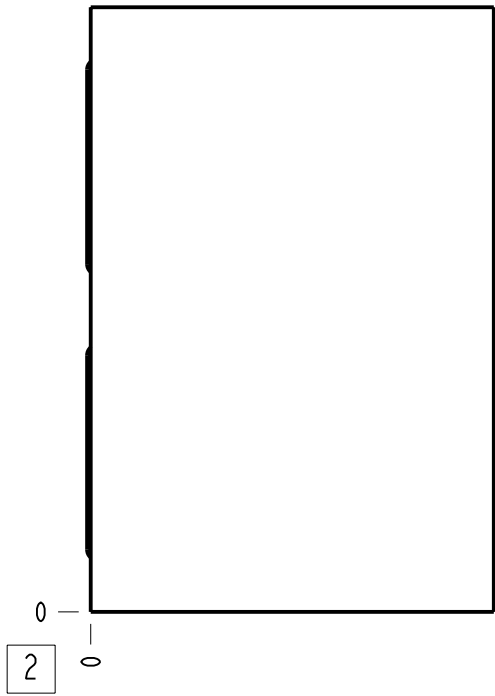
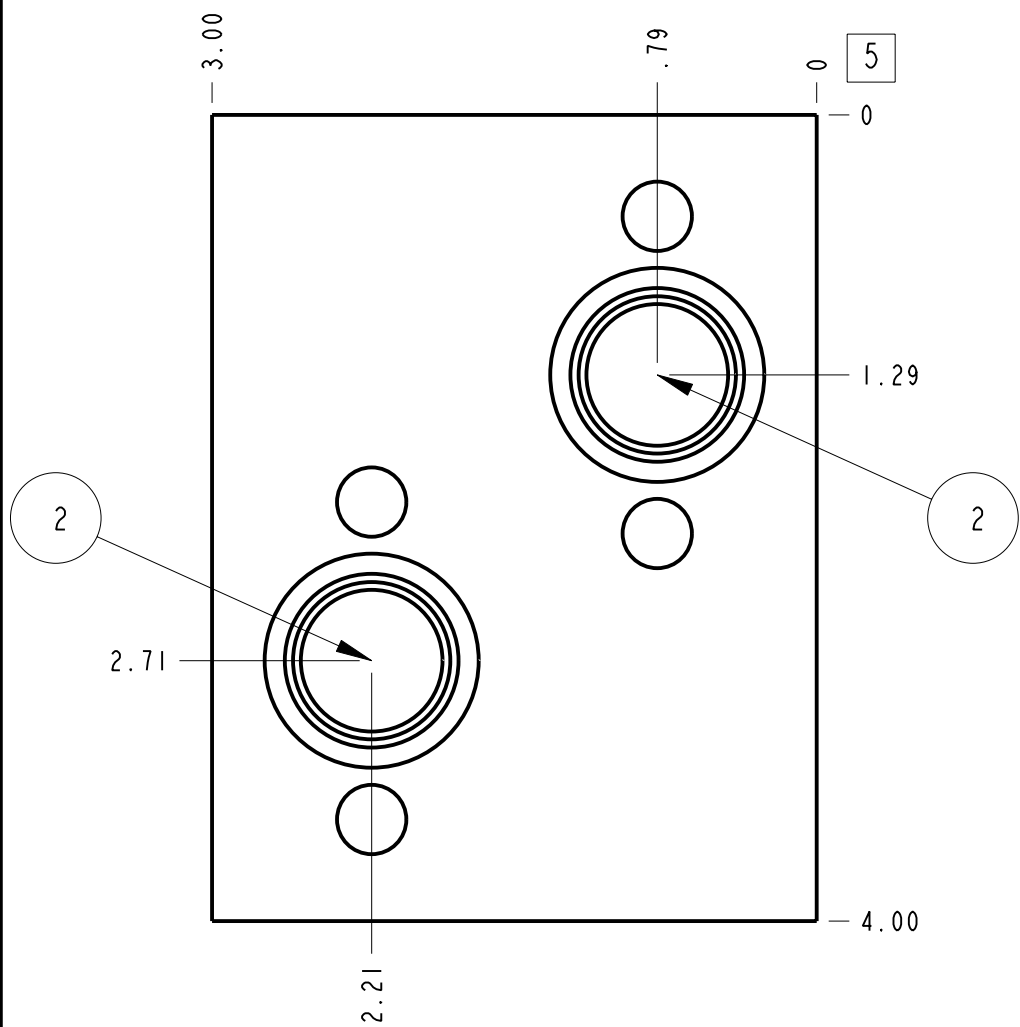
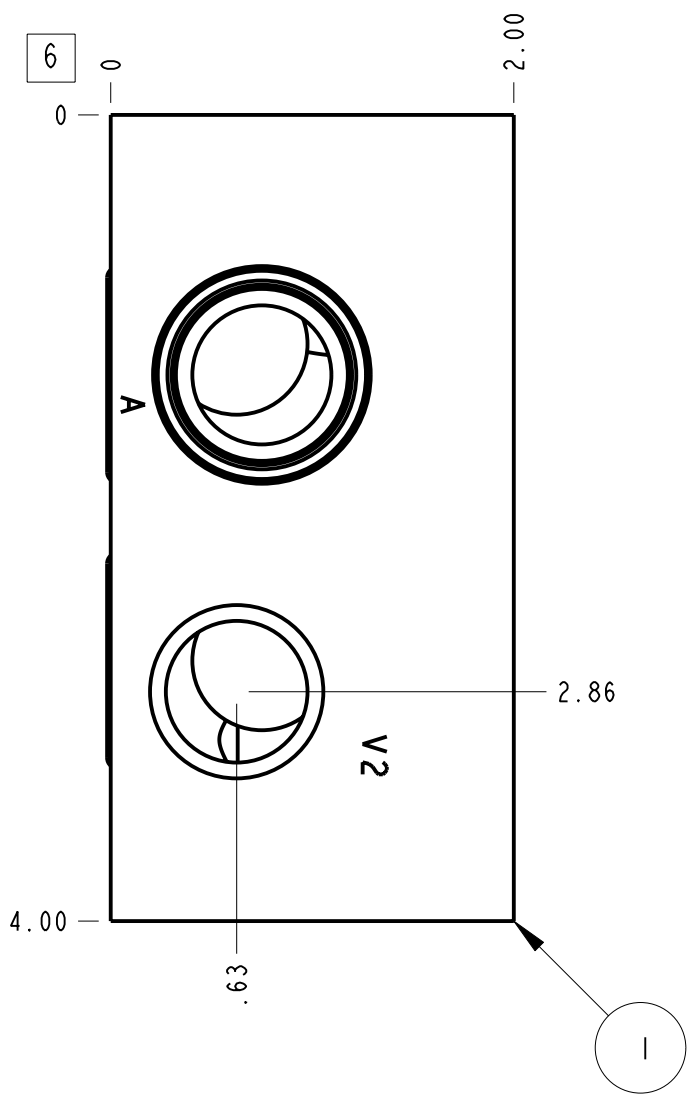
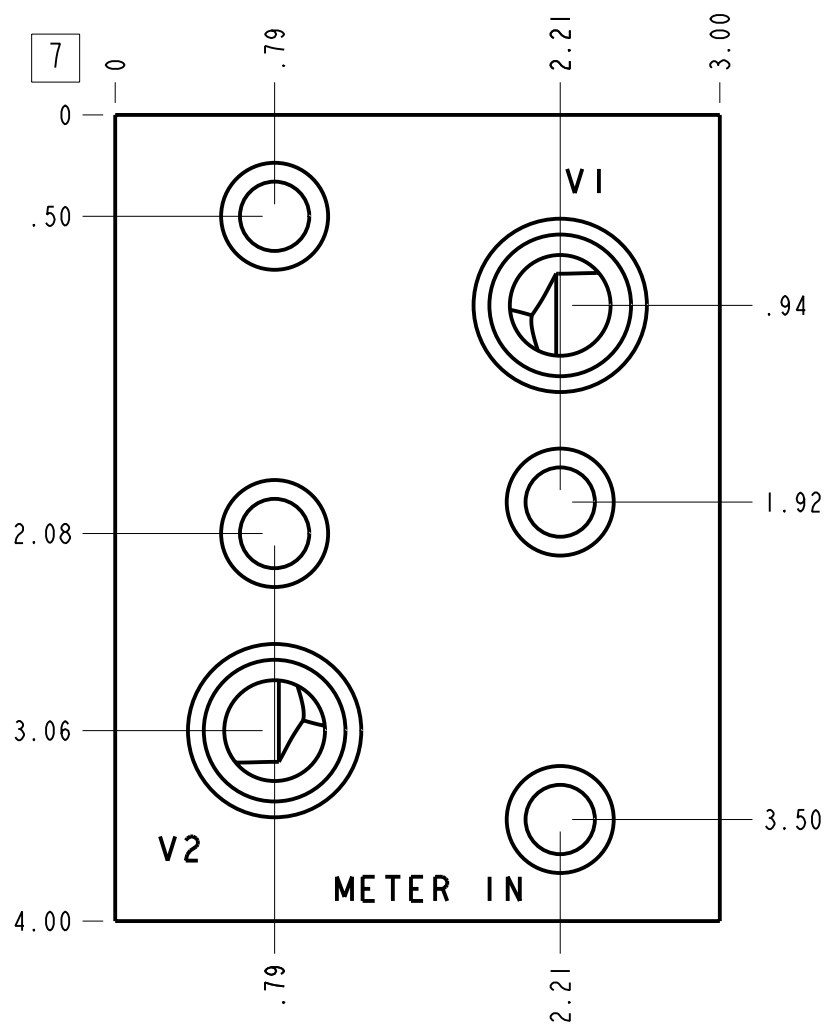


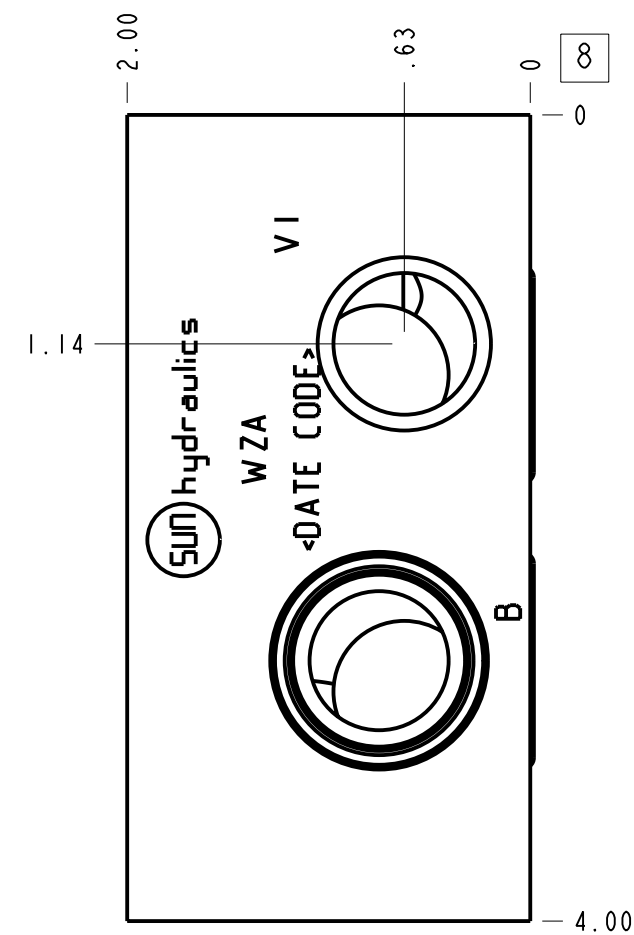

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
WZA	Ports V1 & V2	1/2" NPTF

Technical Data	U.S. Units	Metric Units
Cavity	T-5A	
Body Features	Meter in A and B	
Body Type	Motor mount	
Interface	Danfoss OMP/OMR	
Open Cavity Quantity	2	
Weight	1.804 lb.	0,818 kg.
Mounting Hole Diameter	.34 in.	8.6 mm
Mounting Hole C'bore Diameter	.53 in.	13,5 mm
Mounting Hole C'bore Depth	.50 in.	12,7 mm

2	500-001-118		N-0674-70	O-RING	2
1	159-322-001		6061-T6 ALUMINUM	BODY	1
ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY
MODEL			ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE		
DESCRIPTION			DATE	SCALE	DWG SIZE SHEET
T-5A Motor mount Danfoss OMP/OMR Meter in A and B			Dec-26-25	1.050	C 1
			FIRST ANGLE THIRD ANGLE		
			SUN hydraulics®		