






Technical Data	U.S. Units	Metric Units
Cavity	T-11A	
Body Features	(See Notes)	
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	1	
Weight	2.002 lb.	0,908 kg.
Mounting Hole Diameter	.34 in.	8.6 mm
Mounting Hole Depth	Through	
Mounting Hole Quantity	2	
Includes integral cartridge(s)	Yes (see Included Components)	

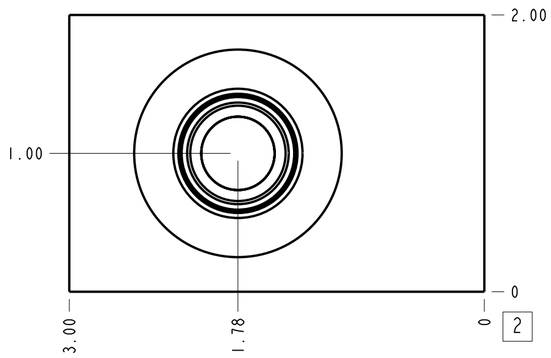

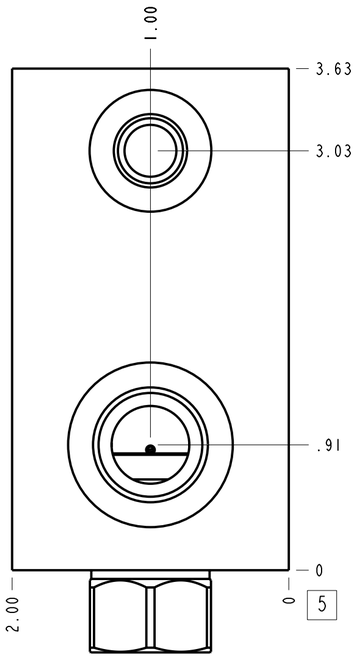

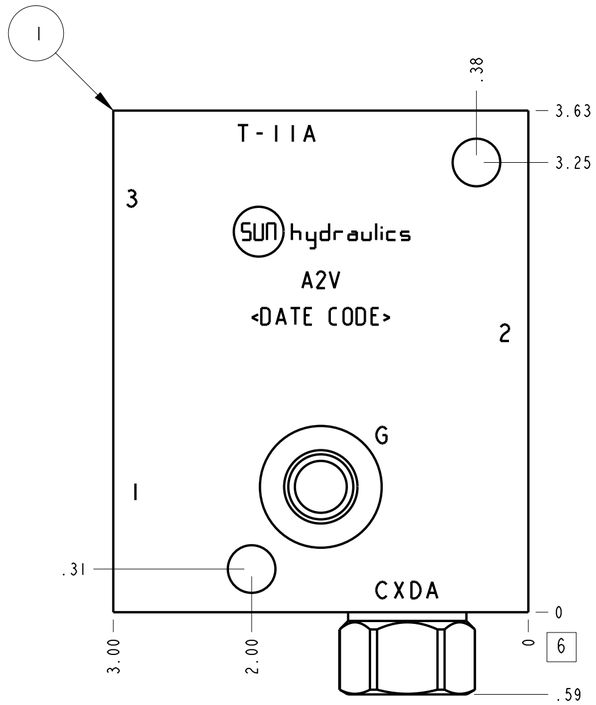


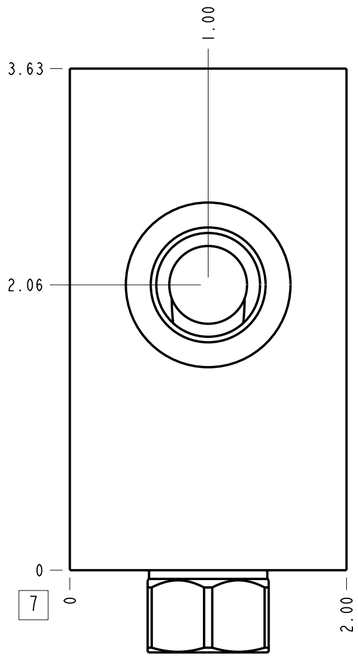

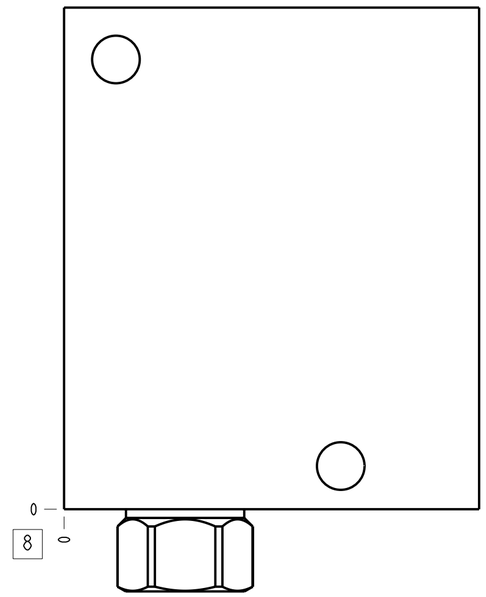

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.
3. Body Features: Ninety degree with reverse flow check, accepts standard and weatherized coils.

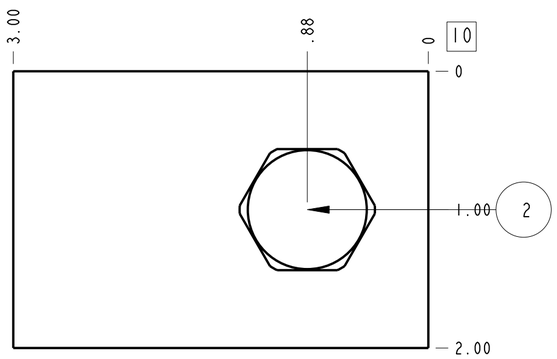

Port Headings		
Product	Port	Size
A2V	Ports 1 & 2	1/2" BSPP
A2V	Port 3	1/4" BSPP
A2V	Gage Port	1/4" BSPP

ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY
2	CXDA-XCN			CHECK VALVE	1
1	174-485-009		6061-T6 ALUMINUM	BODY	1

MODEL: A2V	ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE			FIRST ANGLE / THIRD ANGLE
DESCRIPTION: T-11A Line mount (See Notes for Body Features)	DATE: Feb-24-25	SCALE: 1.182	DWG SIZE: C	SHEET: 1

sun hydraulics