
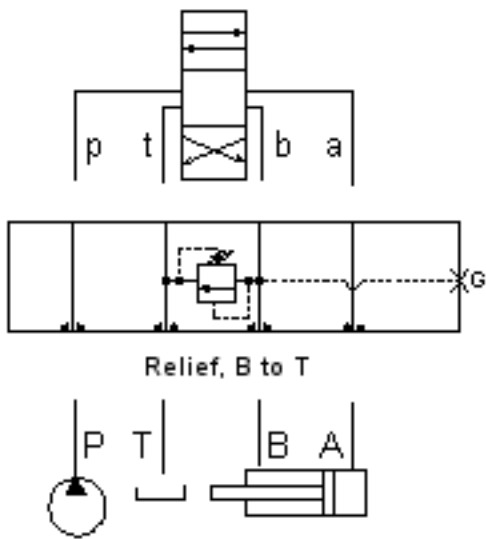
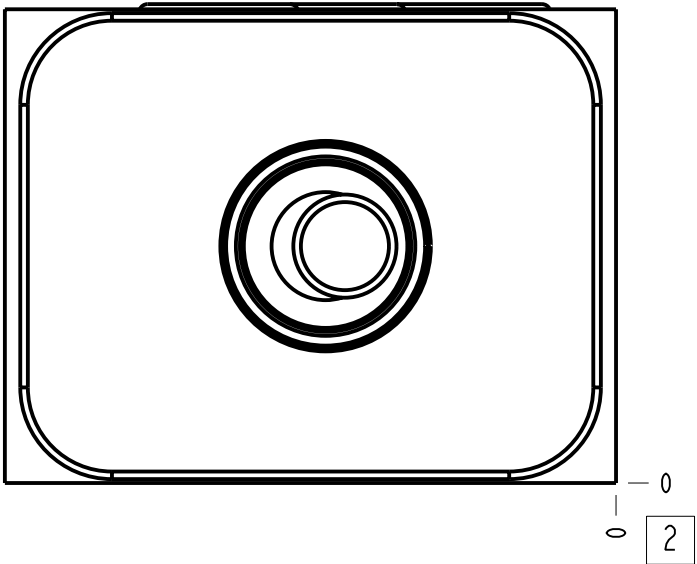
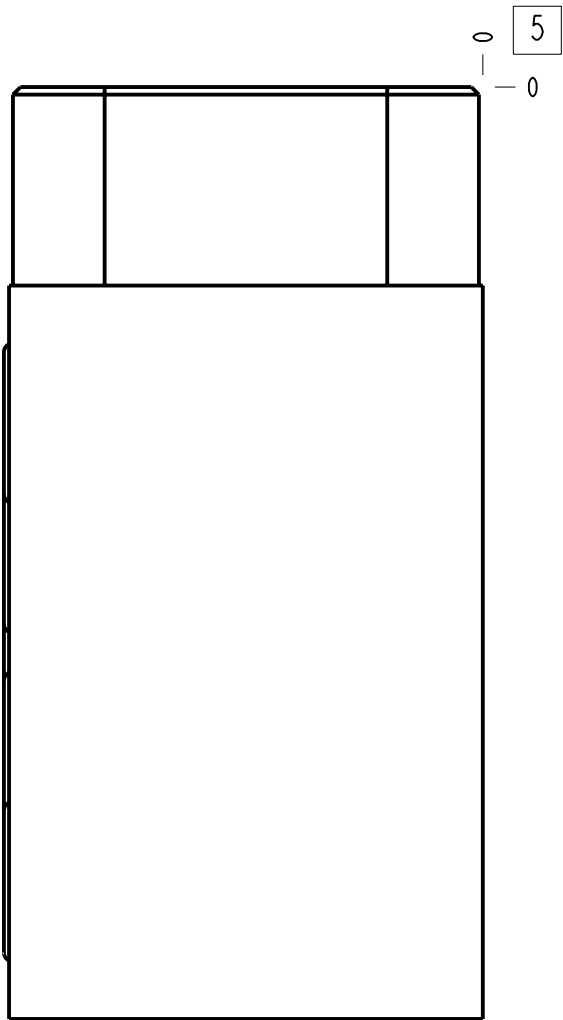
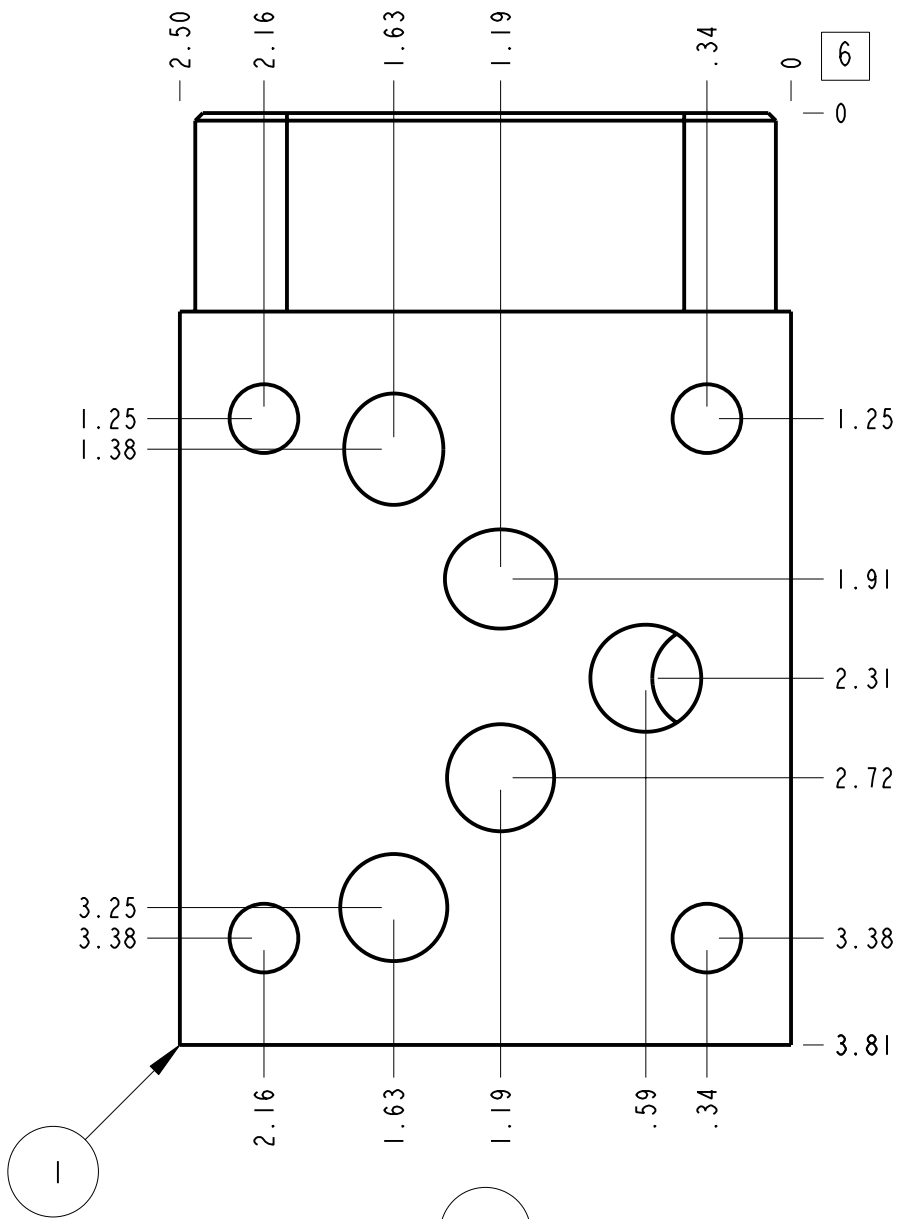
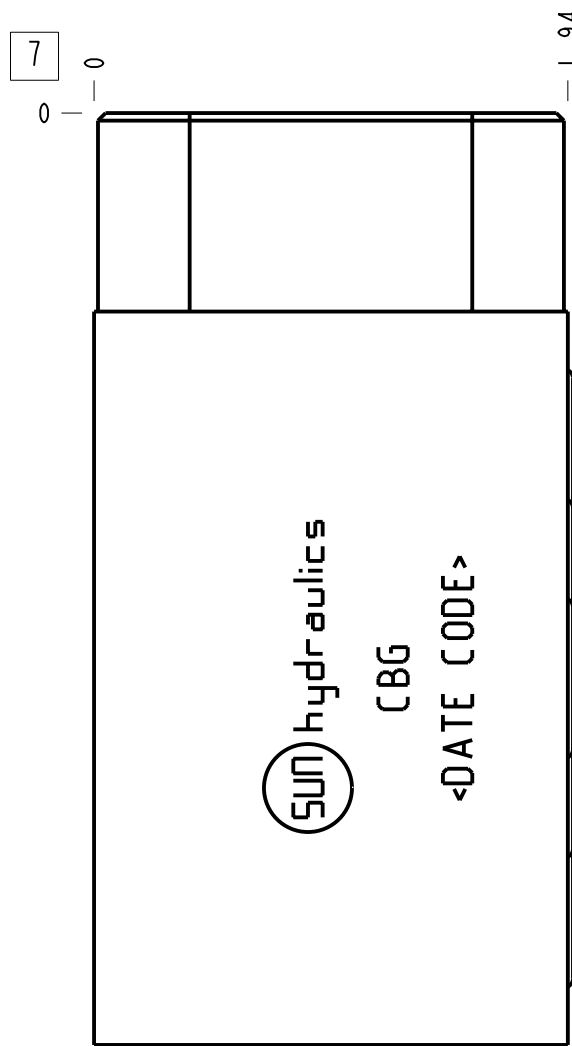
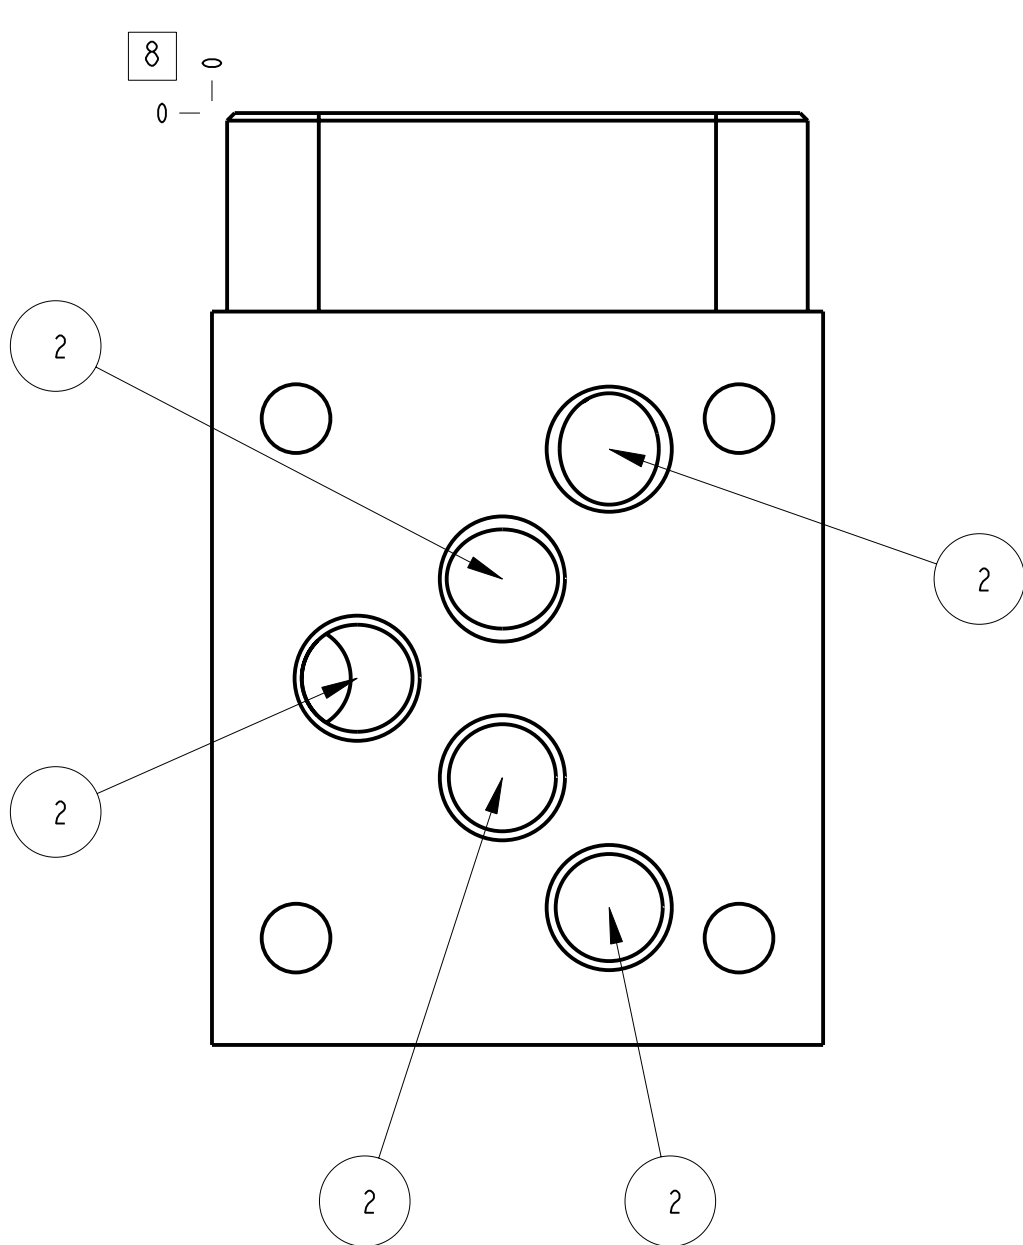


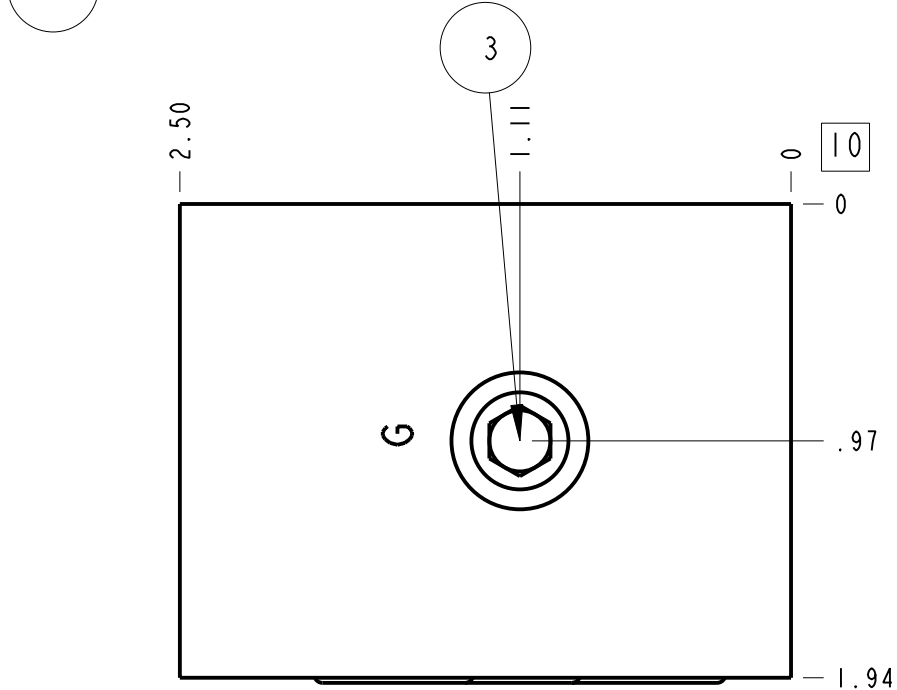

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. Seal retainer plate is not required for this model.
3. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
CBG	Gage Port (Plugged)	1/4" NPTF

Technical Data	U.S. Units	Metric Units
Cavity	T-10A	
Body Features	B to T	
Body Type	Sandwich	
Interface	ISO 05	
Open Cavity Quantity	1	
Stack Height	1.94 in.	49 mm
Weight	1.499 lb.	0,680 kg.
Seal Plate Included (see notes)	No	

3	340-003			PLUG-.250-18 NPTF	1
2	500-001-014		N-0674-70	O-RING	5
1	151-203-001		6061-T6 ALUMINUM	BODY	1
ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY
MODEL			ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE		
CBG					
DESCRIPTION			DATE	SCALE	DWG SIZE
T-10A Sandwich ISO 05 B to T			Apr-08-25	1.273	C
			SHEET		
			1		
			FIRST ANGLE		
			THIRD ANGLE		
			SUN hydraulics®		