
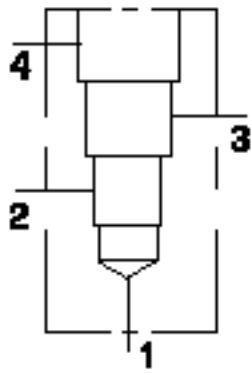
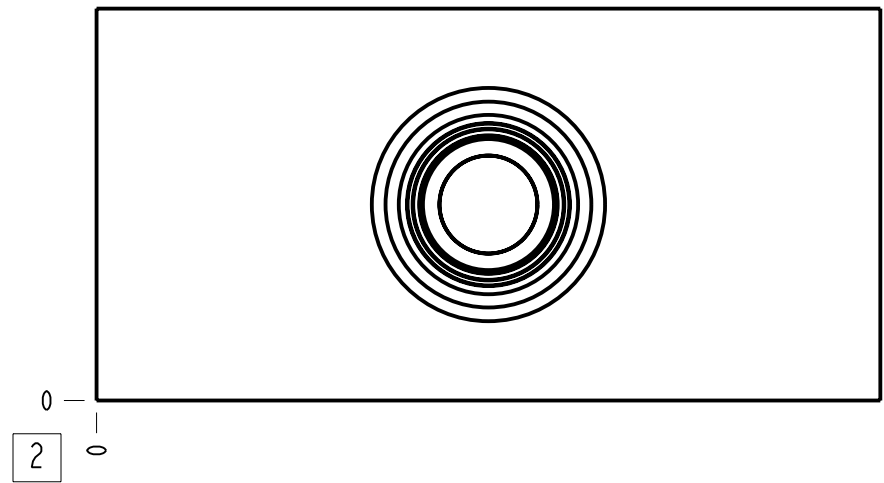
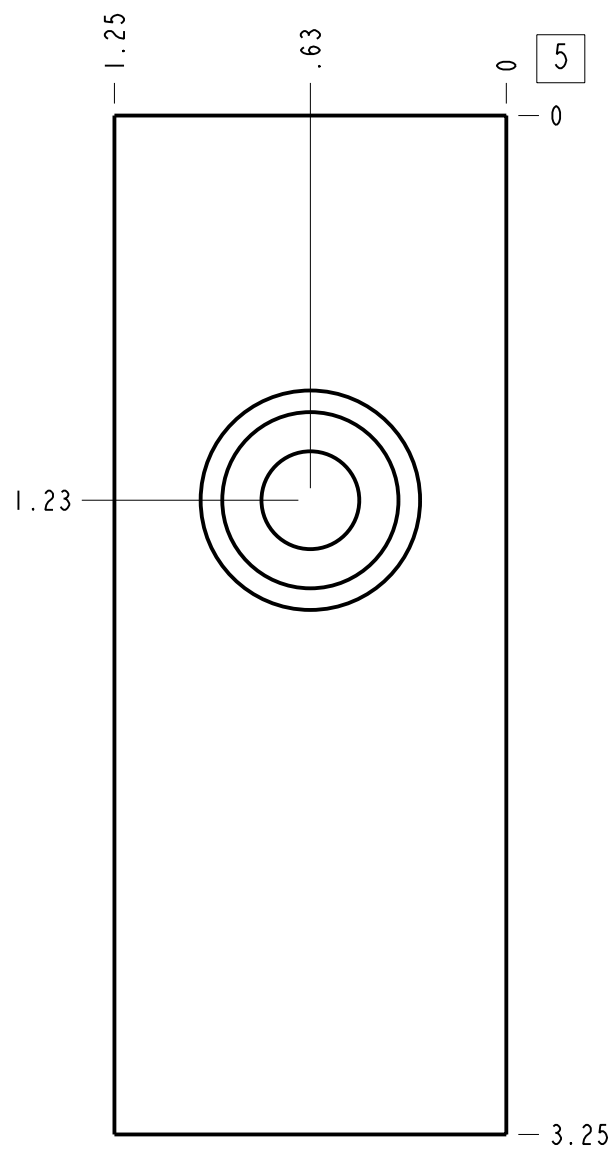
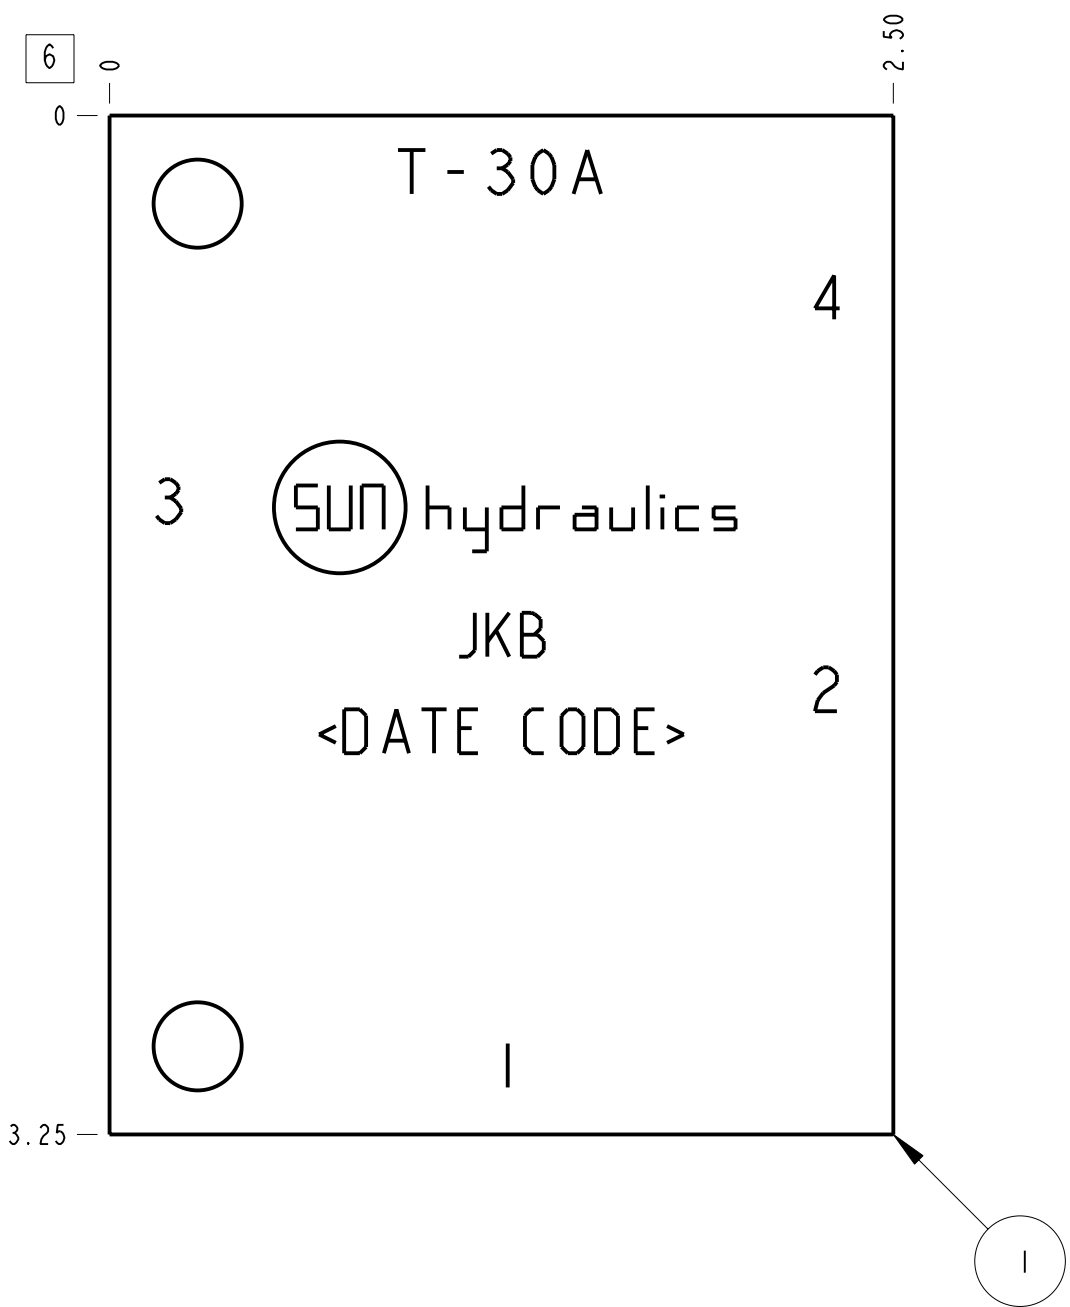
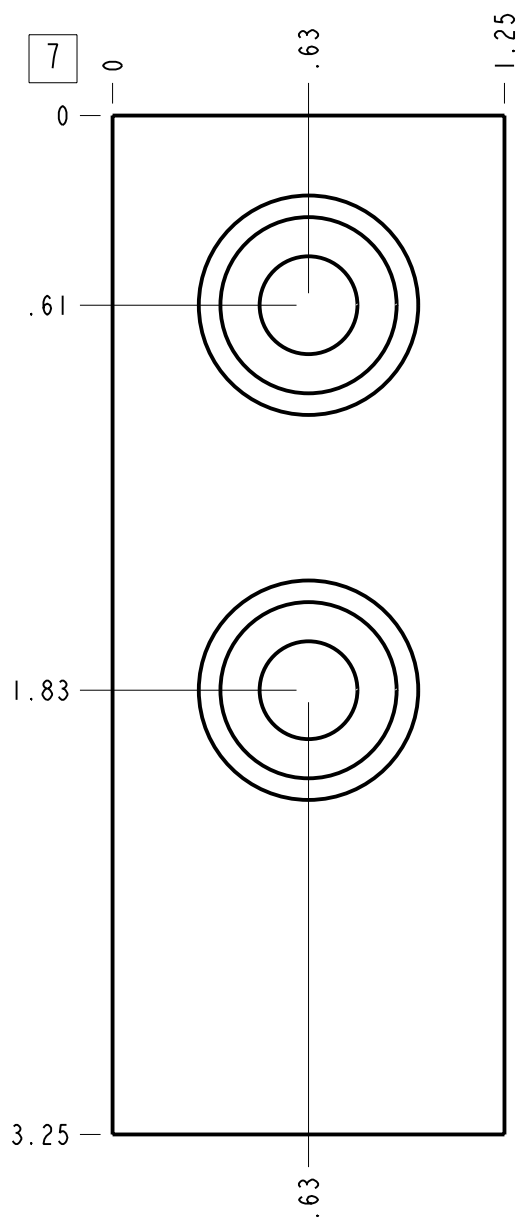
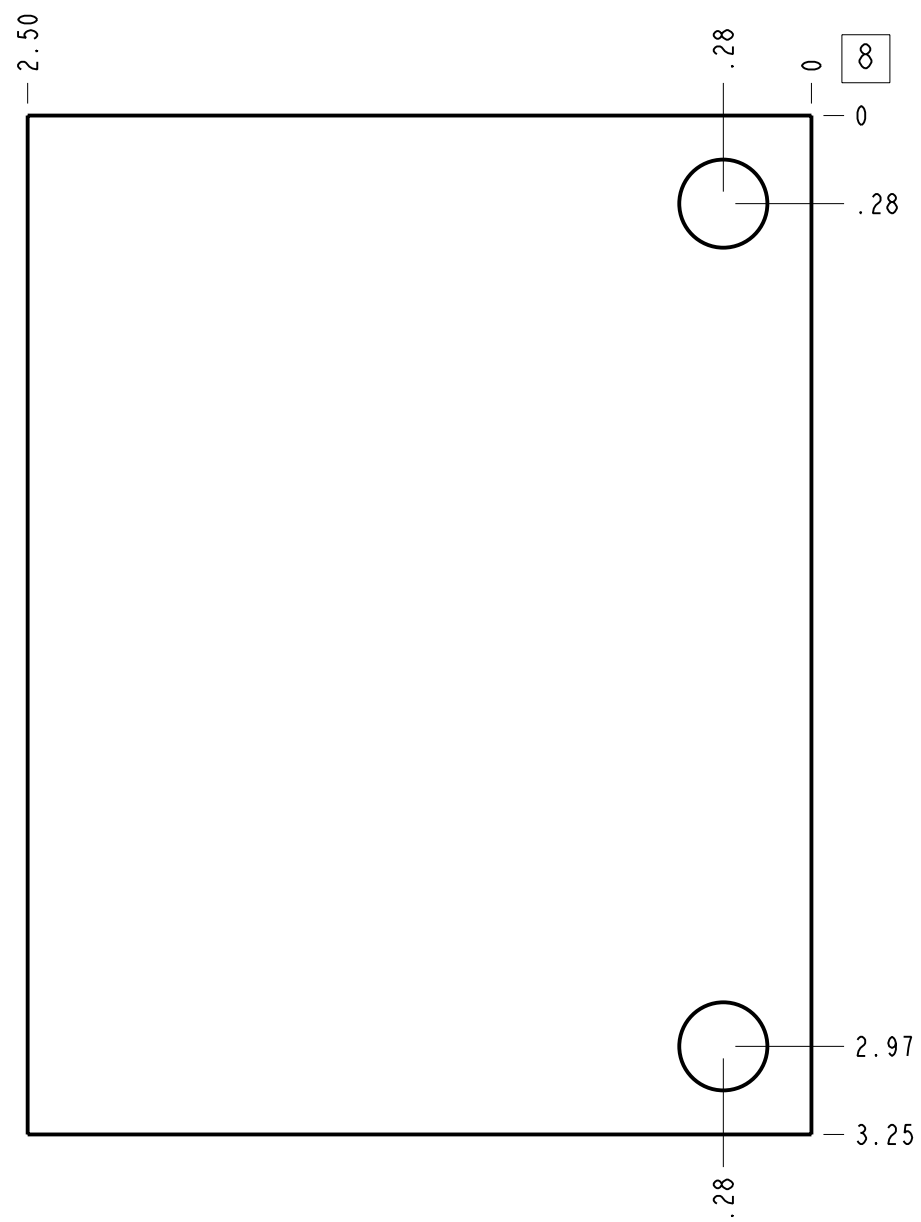


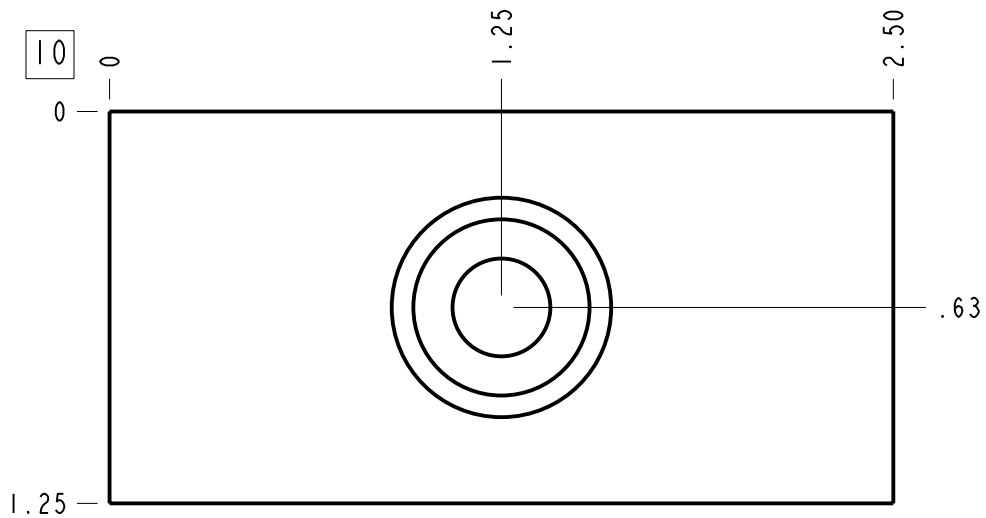

Notes

- Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
- This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

Port Headings		
Product	Port	Size
JKB	All Ports	3/8" NPTF

Technical Data		U.S. Units	Metric Units
Cavity		T-30A	
Body Features		Ninety degree	
Body Type		Line mount	
Interface		None	
Open Cavity Quantity		1	
Weight		0.850 lb.	0,386 kg.
Maximum Operating Pressure - 6061-T651 Aluminum		3000 psi	210 bar
Maximum Operating Pressure - 65-45-12 Ductile Iron		5000 psi	350 bar
Mounting Hole Diameter		.28 in.	7,1 mm
Mounting Hole Depth		Through	
Mounting Hole Quantity		2	

I	17G-198-002		6061-T6 ALUMINUM	BODY		
I T E M	PART NO.	SETTING	MATERIAL	PART NAME		
MODEL			ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE		FIRST ANGLE	THIRD ANGLE
JKB						
DESCRIPTION			DATE	SCALE	DWG SIZE	SHEET
T-30A Line mount Ninety degree			Oct-24-25	1.633	C	I
						