





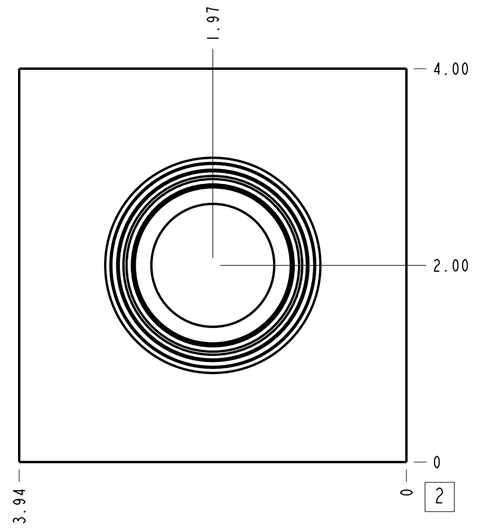


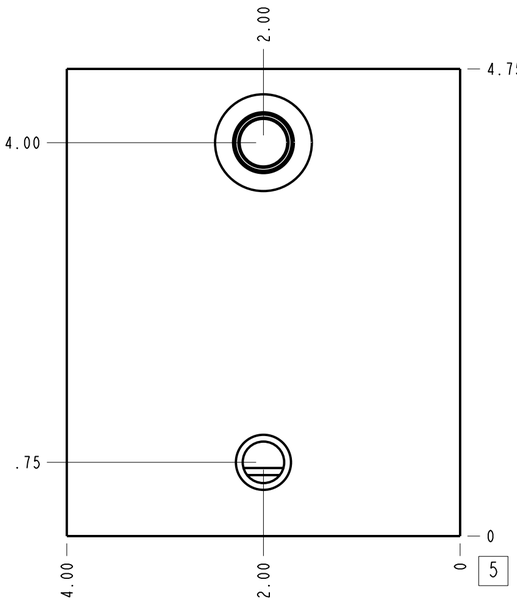

| Technical Data | U.S. Units | Metric Units |
|---|---|---|
| Cavity | T-19AU | |
| Body Features | Ninety degree with gauge port | |
| Body Type | Line mount | |
| Interface | 1.50 SAE C61 | |
| Open Cavity Quantity | 1 | |
| Weight | 5.606 lb. | 2,543 kg. |
| Mounting Hole Thread | .375-16 UNC - 2B in. | |
| Mounting Hole Depth | .62 in. | 15,7 mm |
| Mounting Hole Quantity | 2 | |

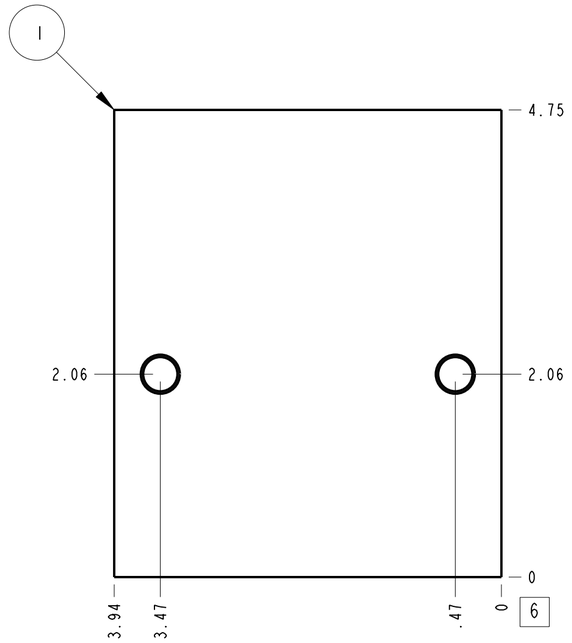

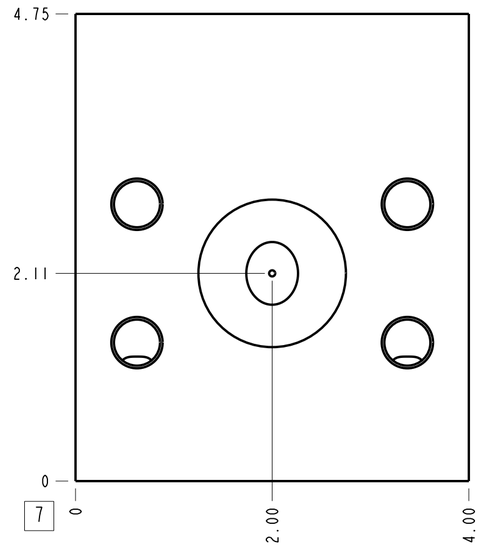


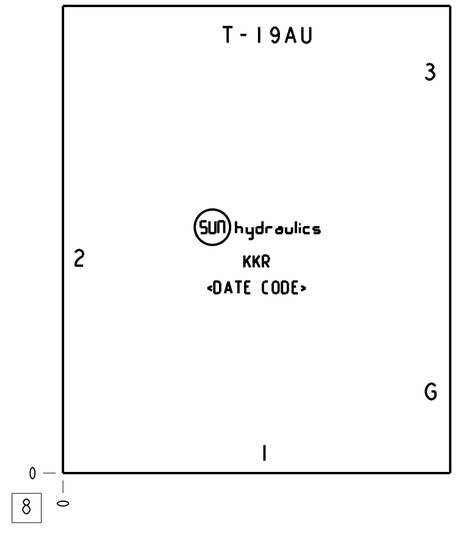

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. Flange mounting hole data: Inch: 1/2-13UNC x 1.06 (26,9 mm) DP, Metric: M14 x 2.0-6H x 1.06 (26,9 mm) DP
3. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

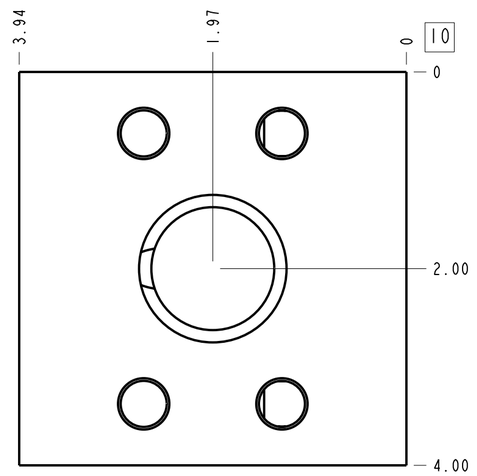


| Port Headings | | |
|---|---|---|
| Product | Port | Size |
| KKR | Ports 1 & 2 | 1/2 in. Code 61 |
| KKR | Port 3 | SAE 6 |
| KKR | Gage Port | 1/4" NPTF |

| ITEM | PART NO. | SETTING | MATERIAL | PART NAME | QTY |
|---|---|---|---|---|---|
| 1 | 175-487-001 | | 6061-T6 ALUMINUM | BODY | 1 |

MODEL: KKR

ALL DIMENSIONS IN INCH
VIEWS ARE THIRD ANGLE

FIRST ANGLE / THIRD ANGLE

DESCRIPTION: T-19AU Line mount 1.50 SAE C61
Ninety degree with gauge port

| DATE | SCALE | DWG SIZE | SHEET |
|---|---|---|---|
| Mar-11-24 | 0.840 | C | 1 |

sun hydraulics®