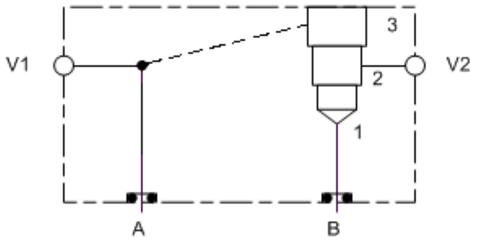

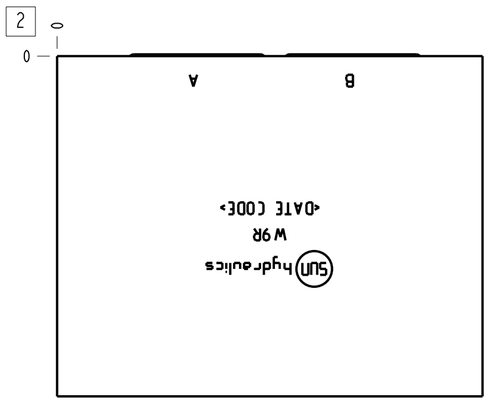

Technical Data	U.S. Units	Metric Units
Cavity	T-17A	
Body Features	Direct mount	
Body Type	Motor mount	
Interface	Danfoss OMT	
Open Cavity Quantity	1	
Weight	5.933 lb.	2,691 kg.
Mounting Hole Diameter	.42 in.	10,7 mm
Mounting Hole Depth	Through	
Mounting Hole Quantity	4	
Mounting Hole C'bore Diameter	.69 in.	17,5 mm
Mounting Hole C'bore Depth	.54 in.	

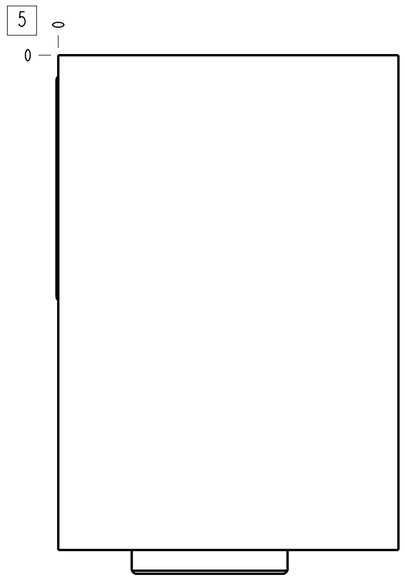

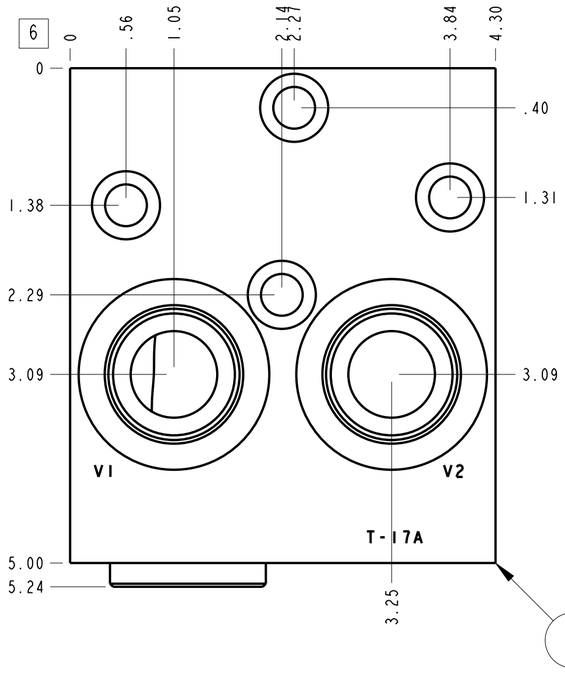

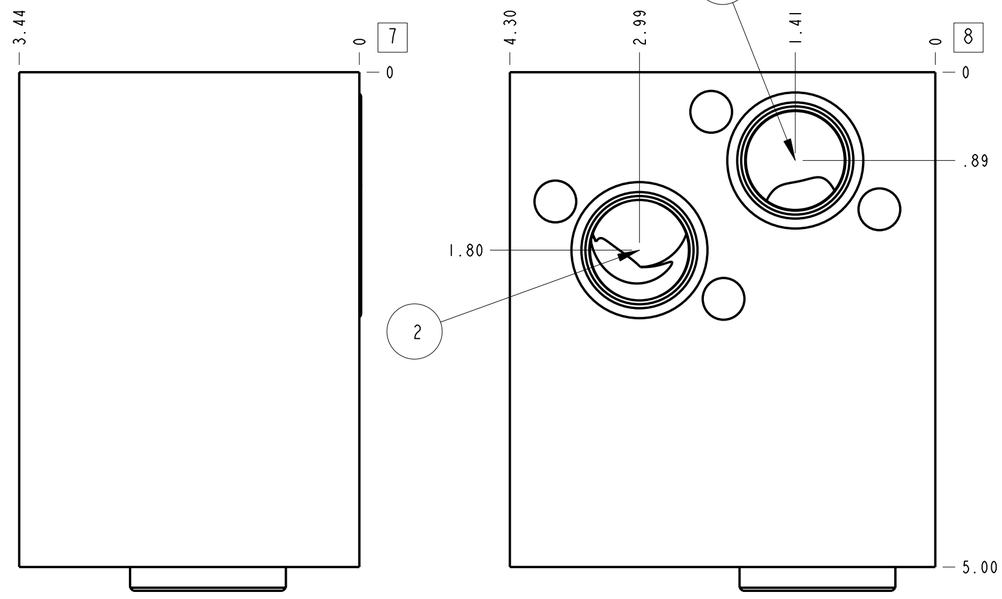

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.

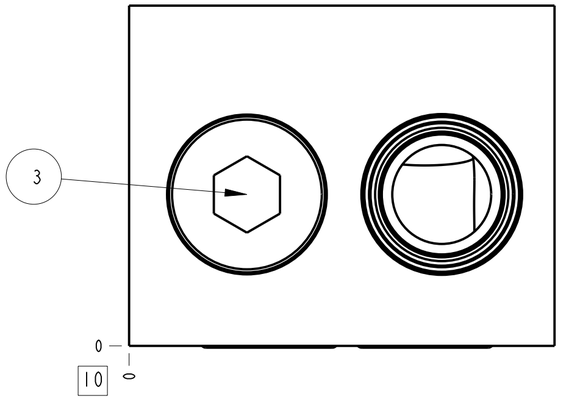

Port Headings		
Product	Port	Size
W9R	Ports V1 & V2	SAE 16

ITEM	PART NO.	SETTING	MATERIAL	PART NAME	QTY
3	330-018-006		BUNA-N	PLUG-1.000-11 BSPP	1
2	500-001-123		N-0674-70	O-RING	2
1	157-054-001		6061-T6 ALUMINUM	BODY	1

MODEL: W9R

ALL DIMENSIONS IN INCH
VIEWS ARE THIRD ANGLE

FIRST ANGLE / THIRD ANGLE

DESCRIPTION: T-17A Motor mount Danfoss OMT Direct mount

DATE	SCALE	DWG SIZE	SHEET
Feb-24-25	0.845	C	1

sun hydraulics