

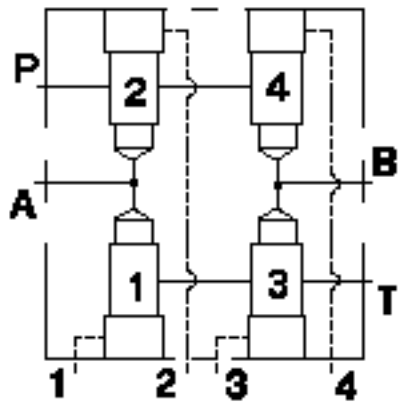
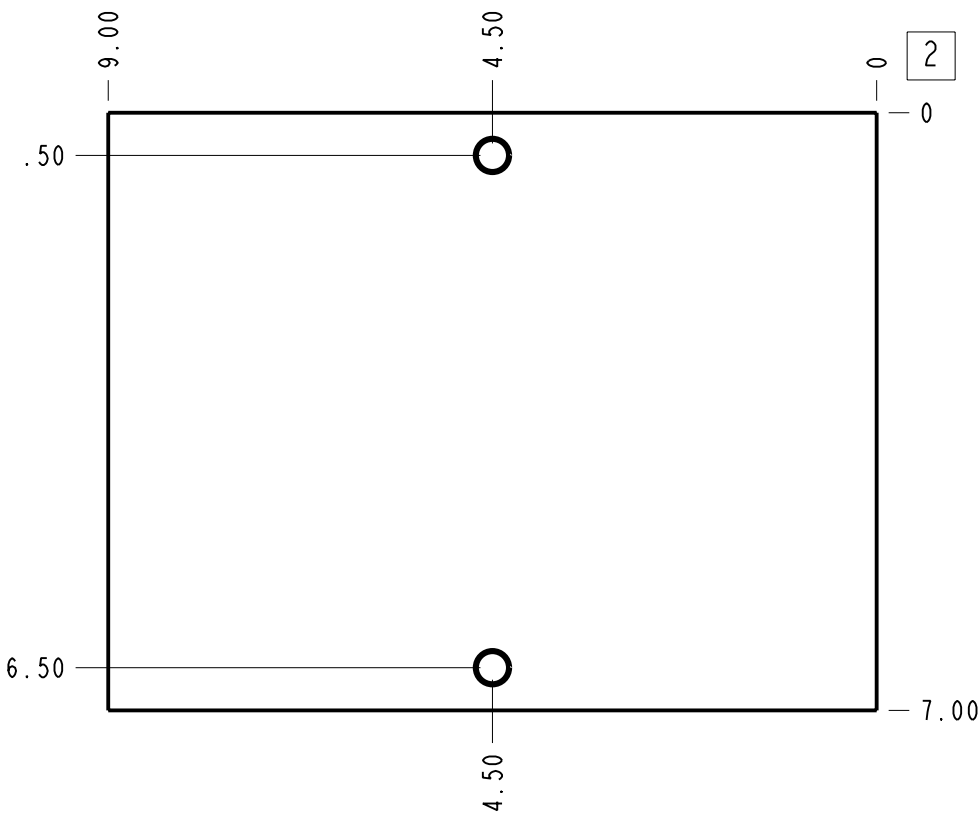
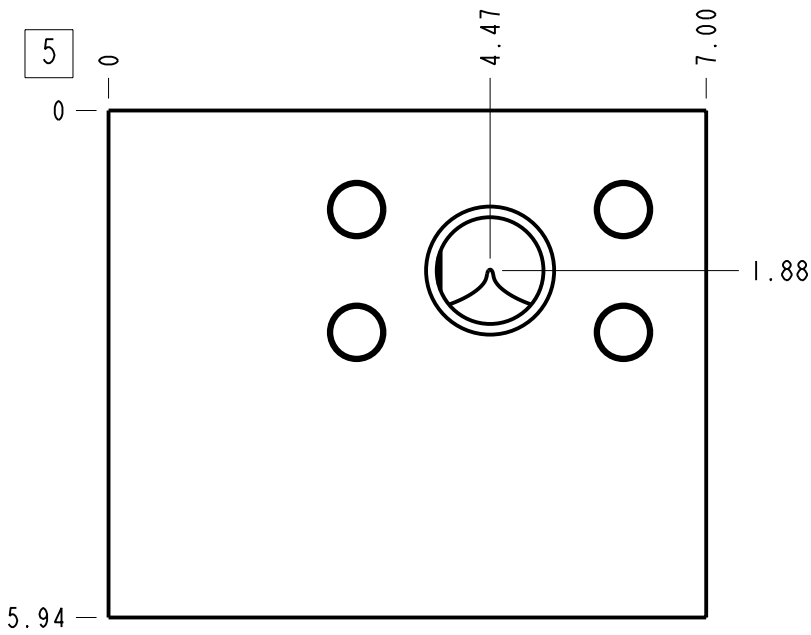
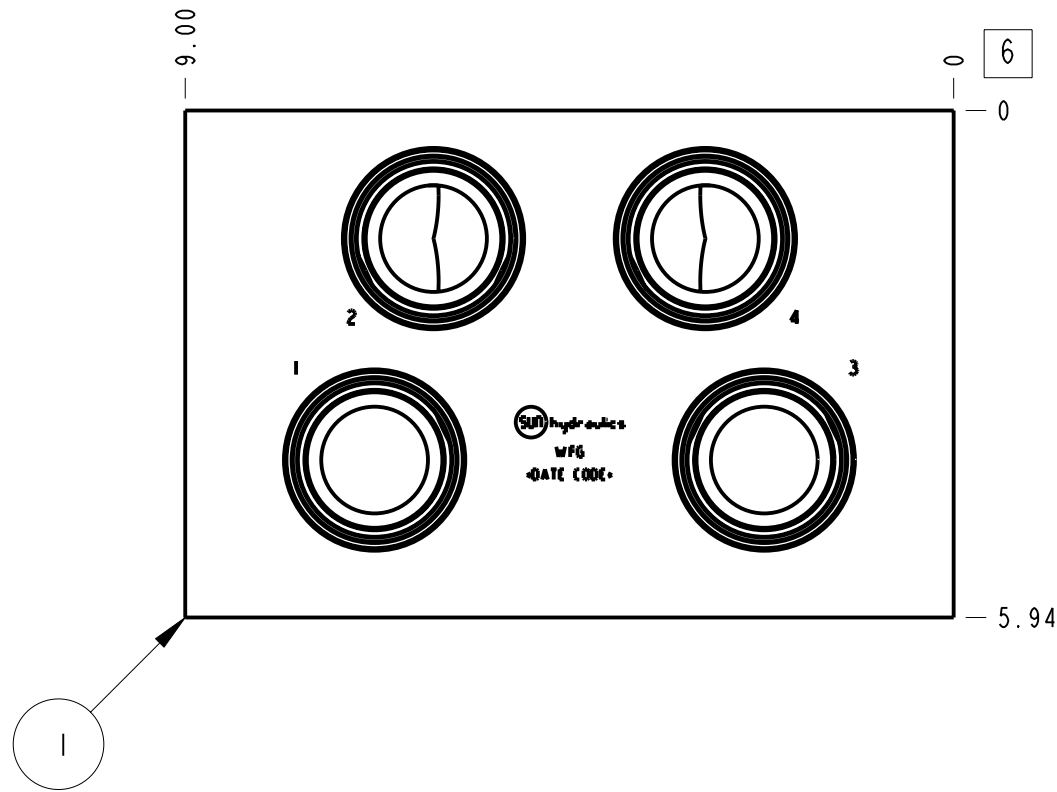


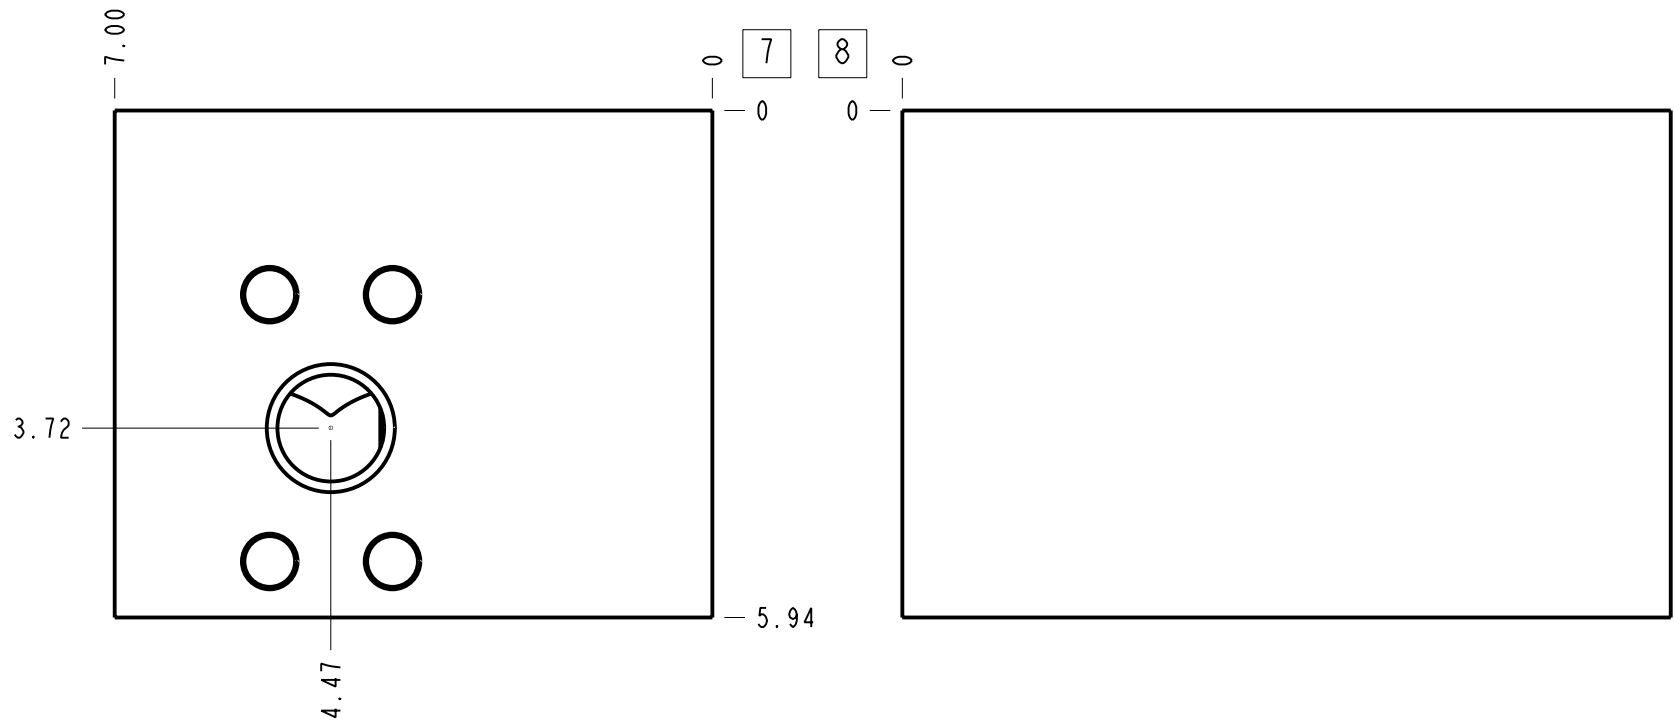

Notes

1. Important: Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
2. This drawing is for reference only. It is generated by an automated process and does not fall under Sun's document control process.
3. Body Features: Four port directional circuit using logic valves, BSP pilot ports.

Port Headings		
Product	Port	Size
WFG	Ports A, B, P, T	1/2" Code 62
WFG	All Other Ports	1/4" BSPP

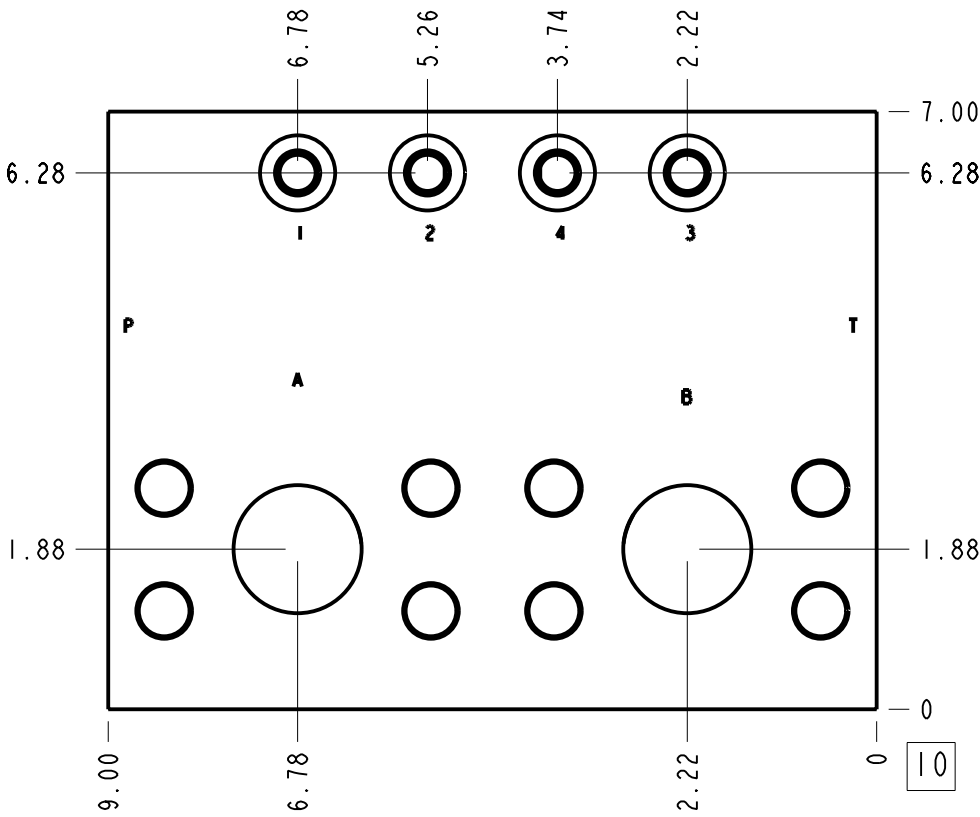

Technical Data	U.S. Units	Metric Units
Cavity	T-19A	
Body Features	(See Notes)	
Body Type	Line mount	
Interface	None	
Open Cavity Quantity	4	
Weight	28.337 lb.	12,853 kg.
Mounting Hole Thread	M10x1.5 - 6H	
Mounting Hole Depth	.62 in.	15,7 mm
Mounting Hole Quantity	2	

I	159-663-003		6061-T6 ALUMINUM	BODY		
I T E M	PART NO.	SETTING	MATERIAL	PART NAME		
MODEL			ALL DIMENSIONS IN INCH VIEWS ARE THIRD ANGLE		FIRST ANGLE THIRD ANGLE	
WFG					   	
DESCRIPTION			DATE	SCALE	DWG SIZE	SHEET
T-19A Line mount (See Notes for Body Features)			Aug-30-23	0.445	C	I
						